


## Intrinsically safe pressure relief valves

piloted, subplate or in line mounting - **ATEX** and **IECEX**

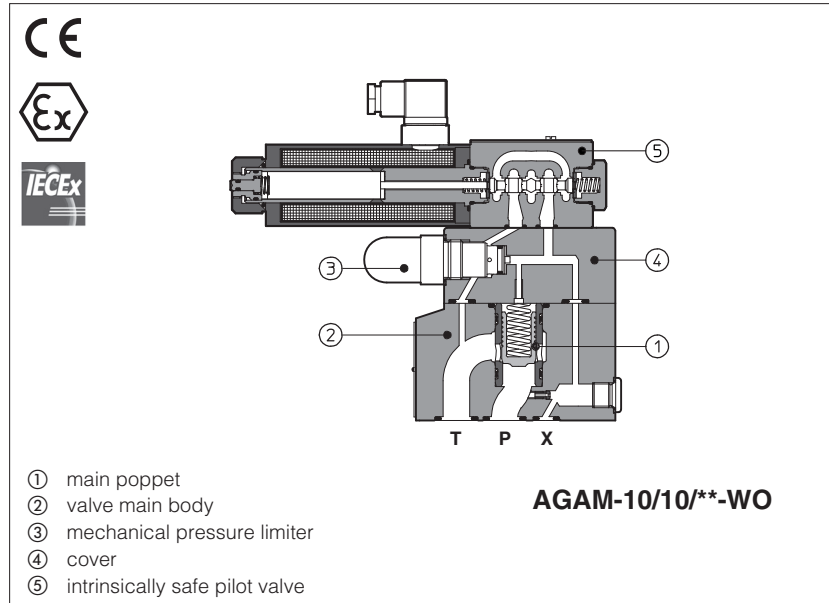

### AGAM, ARAM

Intrinsically safe pressure relief valves equipped with solenoid pilot valve for venting or multiple pressure selection, certified for safe operation in hazardous environment with potentially explosive atmosphere.

Certifications:

- Multicertification **ATEX** and **IECEX**:  
for gas group **II 1G** surface plants zone 0, 1, 2
- Multicertification **ATEX** and **IECEX**:  
**I M1** tunnels or mining plants

See section [7](#) for certification data

The valves must be electrically powered through specific "safety barriers" limiting the max current to the solenoid, see section [11](#).

**AGAM**: pressure relief, subplate mounting

Size: **10, 20** and **32** - ISO 6264

Max flow: **200, 400** and **600 l/min**

**ARAM**: pressure relief, threaded connections

Size: **G 3/4"** and **G 1 1/4"**


Max flow: **350** and **500 l/min**

Max pressure: **350 bar**


### 1 MODEL CODE

AGAM		/	*	-	20	/	20	/	210/100/100	-	WO	/	*	/	*	/	*
Intrinsically safe pressure relief valves, piloted																	
AGAM subplate mounting																	
ARAM threaded connections																	
Certification type: - = Omit for Group II 1G M = Group I (mining)																	
Valve size: 10 = AGAM (ISO 6264-06) 20 = AGAM (ISO 6264-08) 32 = AGAM (ISO 6264-10) 20 = ARAM G 3/4" 32 = ARAM G 1 1/4"																	
Configuration, see section 2 :																	
10	20	22															
11	21	32															

Max regulated pressure of first (second / third) setting, see section 4 :	
50 = 50 bar	100 = 100 bar
210 = 210 bar	350 = 350 bar

Seals material, see section 8 :	
- = NBR	
PE = FKM	
BT = NBR low temp. (1)	
Series number	
Options (2):	
E = external pilot	
V = regulating handwheel for pressure adjustment	
WP=  prolonged manual override protected by rubber cap	
Y = external drain	
WO = intrinsically safe pilot solenoid valve	

## 2 CONFIGURATIONS AND HYDRAULIC SYMBOLS

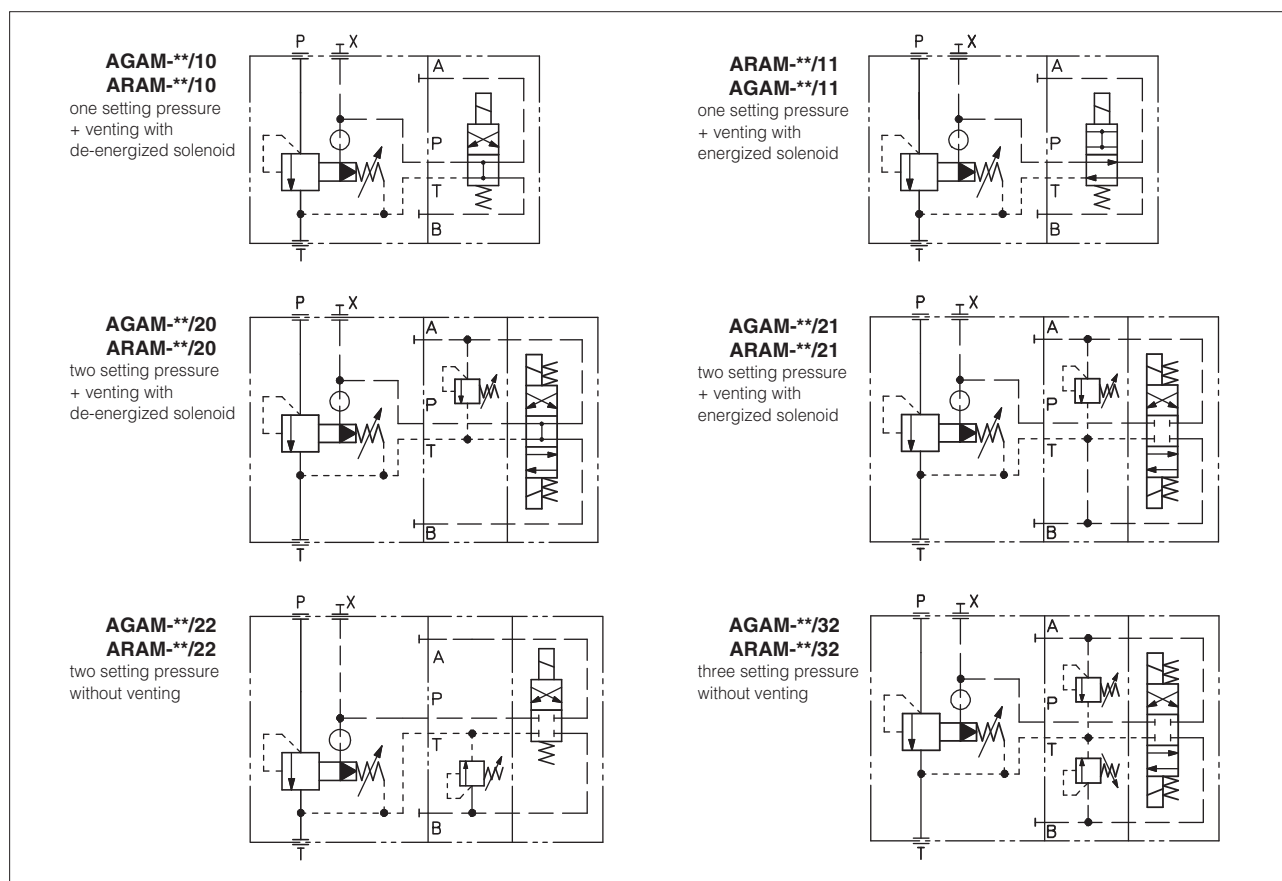

## 3 GENERAL CHARACTERISTICS

Assembly position	Horizontal position only
Subplate surface finishing to ISO 4401	Acceptable roughness index, $R_a \leq 0,8$ recommended $R_a 0,4$ - flatness ratio 0,01/100
MTTFd values according to EN ISO 13849	75 years, for further details see technical table P007
Ambient temperature	<b>Standard</b> = $-30^{\circ}\text{C} \div +60^{\circ}\text{C}$ / <b>PE</b> option = $-20^{\circ}\text{C} \div +60^{\circ}\text{C}$ / <b>BT</b> option = $-40^{\circ}\text{C} \div +60^{\circ}\text{C}$
Storage temperature range	<b>Standard</b> = $-30^{\circ}\text{C} \div +70^{\circ}\text{C}$ / <b>PE</b> option = $-20^{\circ}\text{C} \div +70^{\circ}\text{C}$ / <b>BT</b> option = $-40^{\circ}\text{C} \div +70^{\circ}\text{C}$
Surface protection	Zinc coating with black passivation - salt spray test (EN ISO 9227) > 200h
Compliance	Intrinsically safe protection "Ex ia", see section 7 RoHs Directive 2011/65/EU as last update by 2015/863/EU REACH Regulation (EC) n°1907/2006

## 4 HYDRAULIC CHARACTERISTICS

Valve size	10	20	32
Max operating pressure [bar]	port P = <b>350</b> port T, Y = <b>210</b>		
Max regulated pressure [bar]	<b>50</b>	<b>100</b>	<b>210</b> <b>350</b>
Pressure range [bar]	4÷50;	6÷100;	7÷210; 8÷350
Max flow <b>AGAM (1)</b> [l/min]	200	400	600
Max flow <b>ARAM (1)</b> [l/min]	-	350	500


(1) see diagrams at section 11 and 12

## 5 ELECTRICAL CHARACTERISTICS - see also section 7

Nominal resistance at $20^{\circ}\text{C}$	157 $\Omega$
Coil insulation	Class H
Minimum supply current	70mA
Protection degree	IP65; IP66/IP67 with mating connector suitable for the protection class
Duty factor	100%
Electrical connector	DIN 43650 2 pin+GND

**6 SEALS AND HYDRAULIC FLUIDS** - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +60°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C NBR low temp. seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	15÷100 mm²/s - max allowed range 2.8 ÷ 500 mm²/s		
Max fluid contamination level	ISO 4406 class 20/18/15 NAS 1638 class 9, see also filter section at <a href="http://www.atos.com">www.atos.com</a> or KTF catalog		
Hydraulic fluid	Suitable seals type	Classification	Ref. Standard
Mineral oils	NBR, FKM, NBR low temp.	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR, NBR low temp.	HFC	

 The ignition temperature of the hydraulic fluid must be 50°C higher than the max solenoid surface temperature

**(1) Performance limitations in case of flame resistant fluids with water:**

- max operating pressure = 210 bar
- max fluid temperature = 50°C


**7 CERTIFICATION DATA**

Valve type	AGAM, ARAM			AGAM/M, ARAM/M
Certification	ATEX, IECEx (Group II)			ATEX, IECEx (Group I)
Solenoid code	COW-150			COW-150/M
Type examination certificate (1)	ATEX: TUV IT 22 ATEX 051X; IECEX: IECEX TPS 22.0057X;			ATEX: TUV IT 22 ATEX 051X IECEX: IECEX TPS 22.0057x
Method of protection	<ul style="list-style-type: none"> <li>• ATEX, Ex II 1G Ex ia IIC T6 Ga Ex II 1G Ex ia IIC T5 Ga</li> <li>• IECEX Ex ia IIC T6 Ga Ex ia IIC T5 Ga</li> </ul>			<ul style="list-style-type: none"> <li>• ATEX, Ex I M1 Ex ia I Ma</li> <li>• IECEX Ex ia I Ma</li> </ul>
Temperature class	T6		T5	-
Electrical characteristics (max values)	Ci , Li	≅ 0	≅ 0	≅ 0
	Ui [V]	30V	30V	30V
	Ii [mA]	800mA	2200mA	2200mA
	Pi [W]	3W	6.82W	6.82W
Ambient temperature	-40 ÷ +60°C		-40 ÷ +60°C	-40 ÷ +60°C
Applicable standards	EN 60079-0 EN 60079-11		IEC 60079-0 IEC 60079-11	

**(1)** The type examiner certificates can be downloaded from [www.atos.com](http://www.atos.com)

 **WARNING:** service work performed on the valve by the end users or not qualified personnel invalidates the certification

**8 EX PROOF SOLENOIDS WIRING**

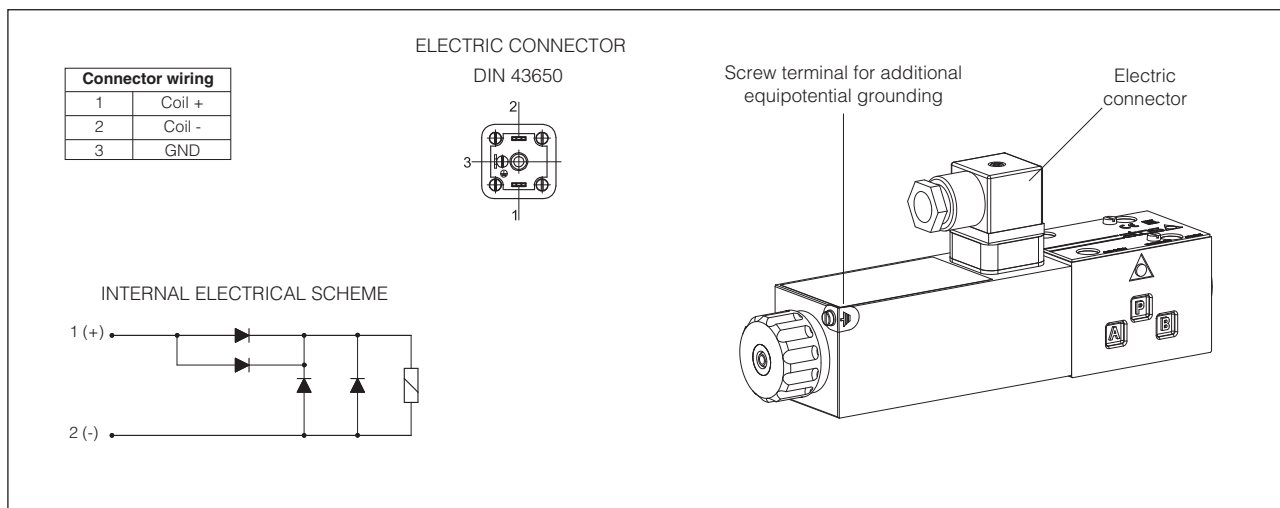

## 9 OPTIONS

**E** = External pilot option to be selected when the pilot pressure is supplied from a different line respect to the P main line.

With option E the internal connection between port P and X of the valve is plugged. The pilot pressure must be connected to the X port available on the valve's mounting surface or on main body (threaded pipe connection G 1/4").



**V** = Regulating handwheel for pressure adjustment

**WP** = Manual override protect by metallic cap

**Y** = The external drain is mandatory in case the main line T is subjected to pressure peaks or it is pressurized.

The Y drain port has a threaded connection G 1/4" available on the pilot stage body.

**9.1 Possible combined options:** all combinations are available

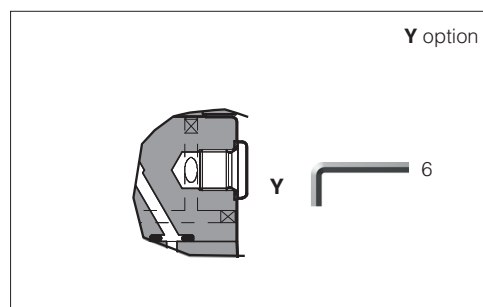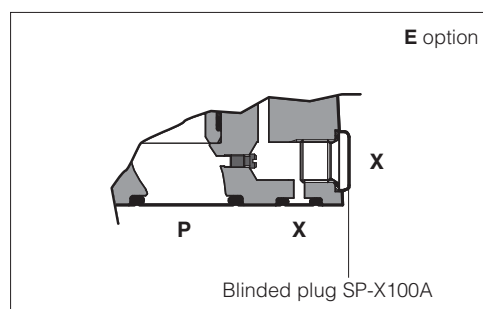

## 10 INTRINSICALLY SAFE BARRIERS - see tech. table GX010

Intrinsically safe valves must be powered through safety barriers certified according to Ex-i protection mode, limiting the energy to the solenoid.

To select the proper intrinsically safe barriers following data must be considered:

- 1)  $V_{max}$  and  $I_{max}$  of the solenoid as specified in section 7 must not be exceeded also in fault conditions;
- 2) For proper operation, the minimum supply current value must be provided (such as 90mA for coil 108  $\Omega$ , with Y-BXNE 412).

The barriers type **Y-BXNE 412** are galvanically isolated electronic devices, complying with European Norms EN60079-0/06, EN60079-11/07 and ATEX certified according to protection mode Ex ia IIC.

The barriers Y-BXNE-412 are double channel type, suitable to operate valves with double or single solenoid. Two single solenoid valves can be connected to the barrier (one to each channel) but they cannot be contemporary operated.

### MODEL CODE OF I.S. BARRIER

**Y-BXNE 412 00**






\*

Supply voltage






**E** = 110/230 V<sub>AC</sub>

**2** = 24÷48 V<sub>DC</sub>

**11 REGULATED PRESSURE VERSUS FLOW DIAGRAMS** based on mineral oil ISO VG 46 at 50°C

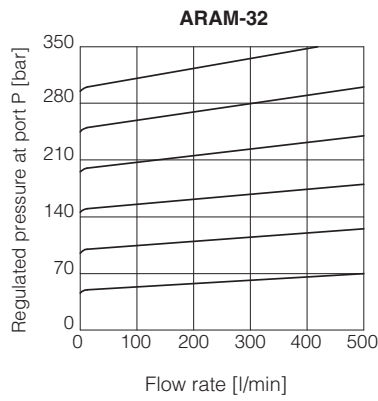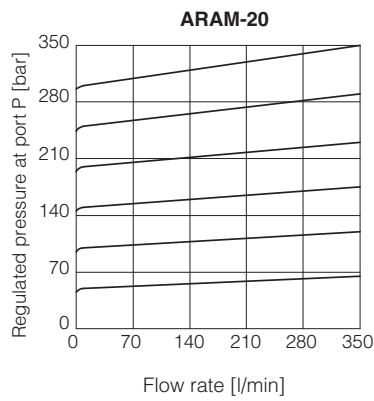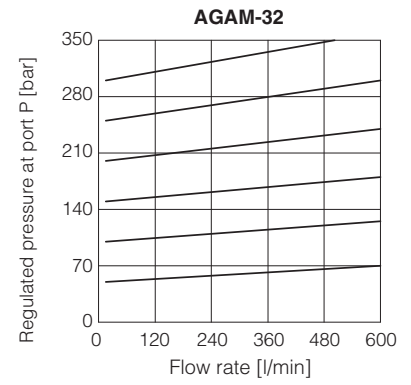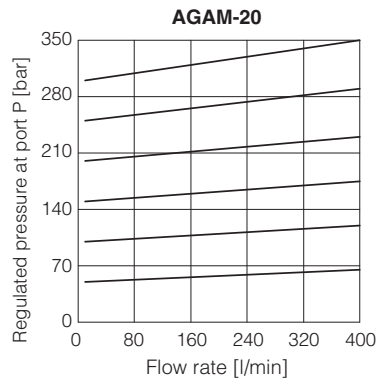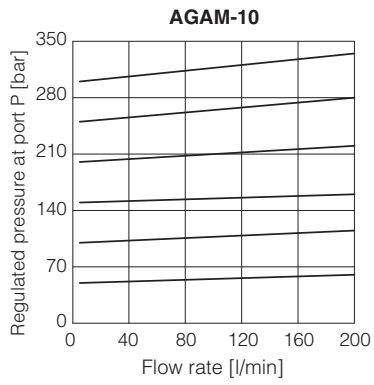

**12 MINIMUM PRESSURE VERSUS FLOW DIAGRAMS** based on mineral oil ISO VG 46 at 50°C

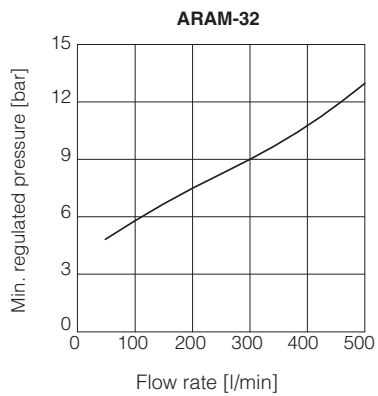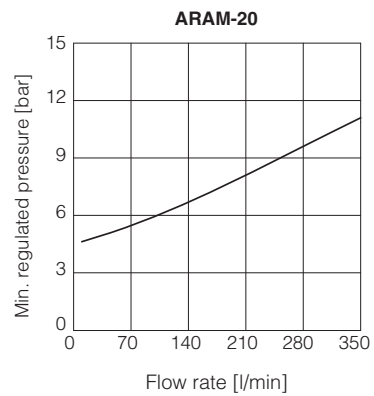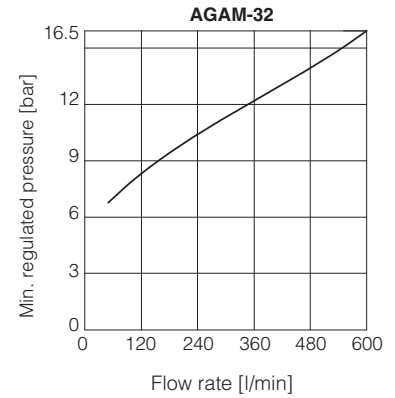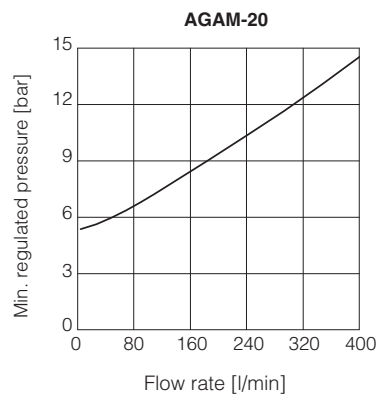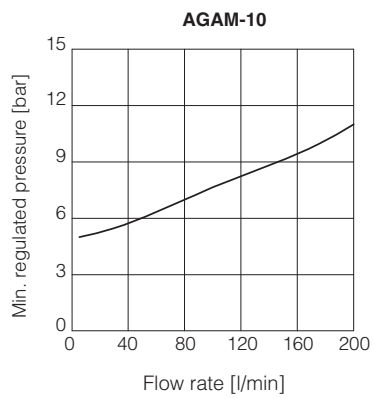

**AGAM-10**

ISO 6264: 2007 (see table P005)

Mounting surface: 6264-06-09-1-97

Fastening bolts:


4 socket head screws M12x35 class 12.9

Tightening torque = 125 Nm









Seals: 2 OR 123; 1 OR 109/70

Ports P, T:  $\varnothing = 14,5$  mmPorts X:  $\varnothing = 3,2$  mm


Mass [kg]	
AGAM-10/10 10/11	6,45
AGAM-10/20 10/21	7,55
AGAM-10/22 10/32	7,25 9



Valve's bottom view

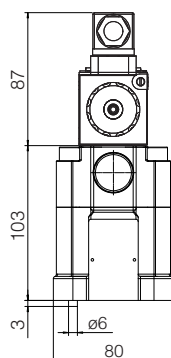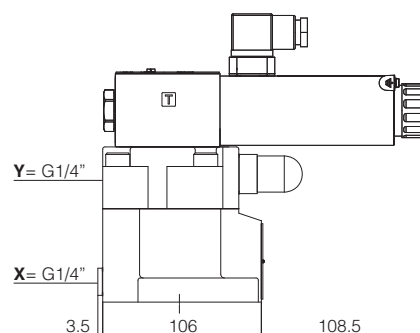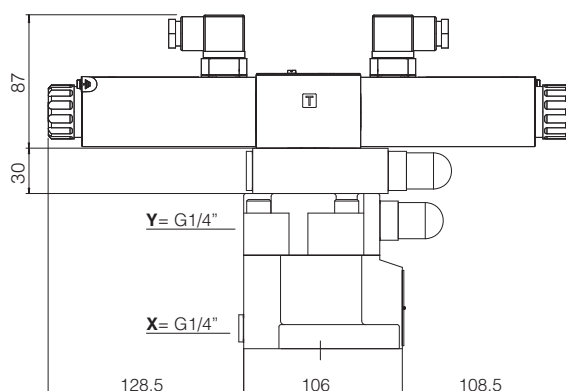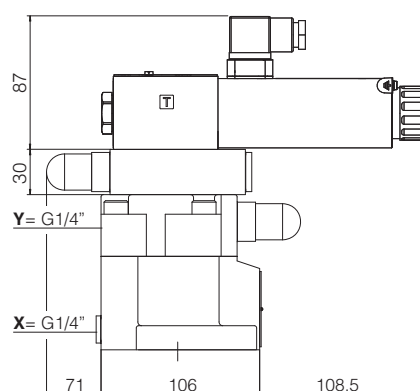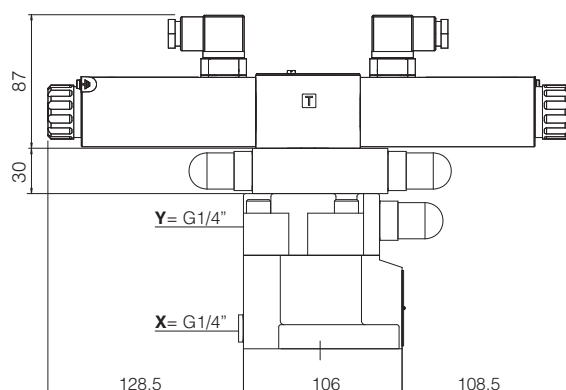**X** = port connection for external pilot (option /E)**Y** = port connection for external drain (option /Y)**AGAM-10/10\*\*WO**  
**AGAM-10/11\*\*WO****AGAM-10/20\*\*WO**  
**AGAM-10/21\*\*WO****AGAM-10/22\*\*WO****AGAM-10/32\*\*WO****Standard****Option /WP****Option /V**

## AGAM-20



ISO 6264: 2007 (see table P005)

Mounting surface: 6264-08-11-1-97

Fastening bolts:

4 socket head screws M16x50 class 12.9

Tightening torque = 300 Nm

Seals: 2 OR 4112; 1 OR 109/70


Ports P, T: Ø = 24 mm

Ports X: Ø = 3,2 mm


Mass [kg]	
AGAM-20/10 20/11	7,65
AGAM-20/20 20/21	8,75
AGAM-20/22 20/32	8,45
	10,2

X = port connection for external pilot (option /E)


Y = port connection for external drain (option /Y)

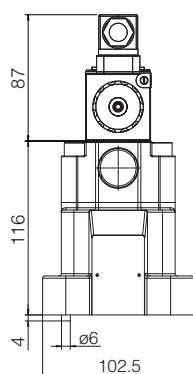


AGAM-20/10/\*\*-WO  
AGAM-20/11/\*\*-WO

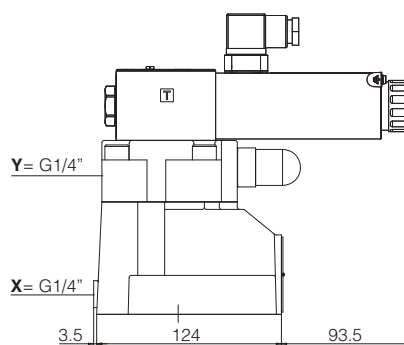


AGAM-20/22/\*\*-WO

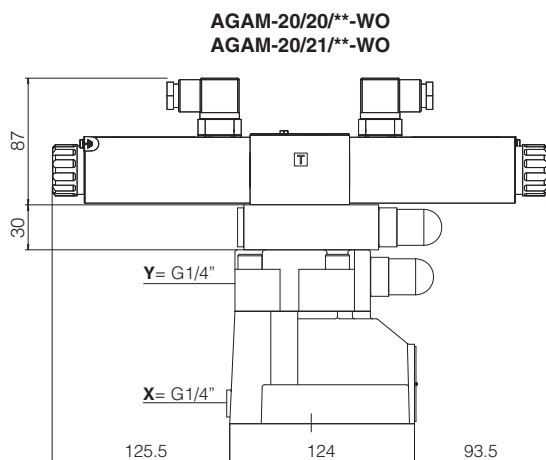


AGAM-20/32/\*\*-WO

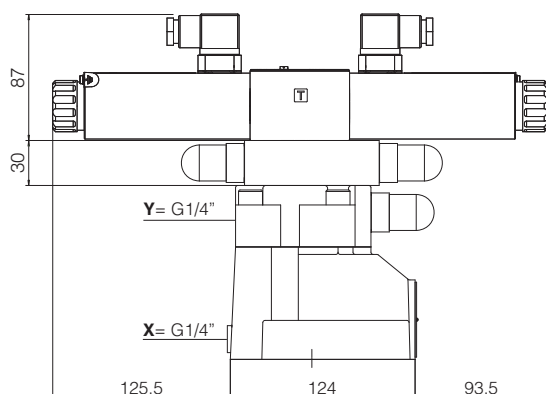


Standard




Option /WP



Option /V




## AGAM-32

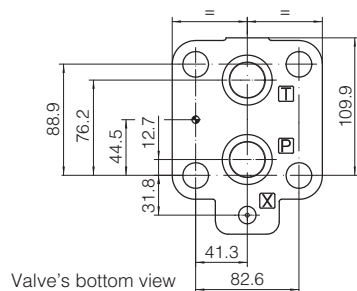


**ISO 6264: 2007** (see table P005)  
**Mounting surface: 6264-10-17-1-97**  
**(with M20 fixing holes instead of standard M18)**  
 Fastening bolts:  
 4 socket head screws M20x60 class 12.9  
 Tightening torque = 600 Nm  
 Seals: 2 OR 4131; 1 OR 109/70  
 Ports P, T:  $\varnothing = 28,5$  mm  
 Ports X:  $\varnothing = 3,2$  mm

Mass [kg]	
AGAM-32/10 32/11	9,05
AGAM-32/20 32/21	10,05
AGAM-32/22 32/32	9,85 11,6


**X** = port connection for external pilot (option /E)  
**Y** = port connection for external drain (option /Y)

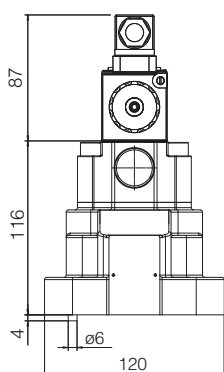


**AGAM-32/10/\*\*-WO**  
**AGAM-32/11/\*\*-WO**

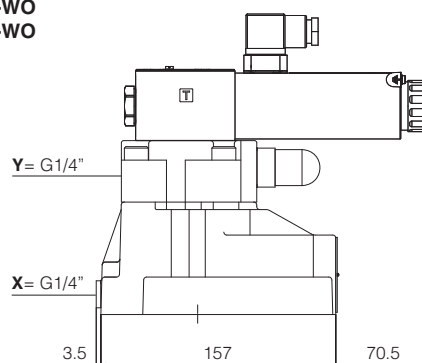


**AGAM-32/20/\*\*-WO**  
**AGAM-32/21/\*\*-WO**

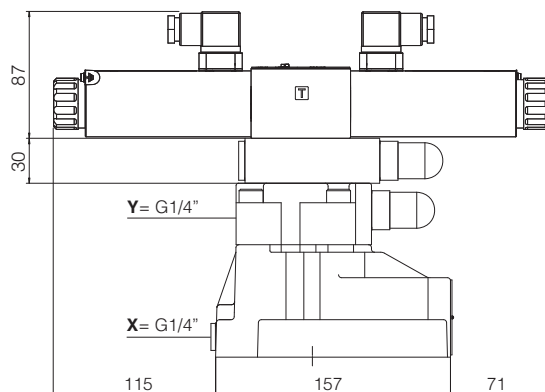


**AGAM-32/22/\*\*-WO**

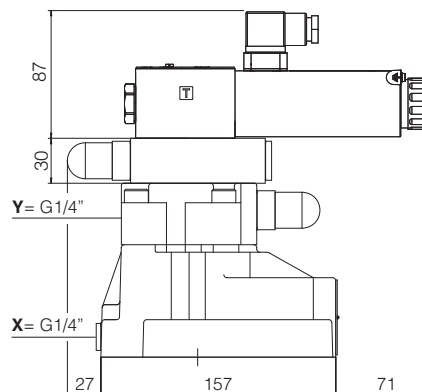


**AGAM-32/32/\*\*-WO**

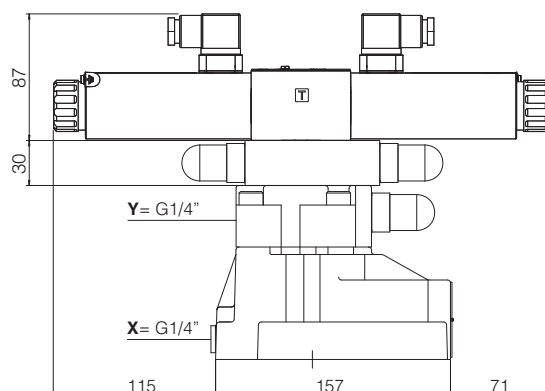


**Standard**



**Option /WP**



**Option /V**







## ARAM-20

X = port connection for external pilot (option /E)


Y = port connection for external drain (option /Y)

Mass [kg]	
ARAM-20/10 20/11	6,75
ARAM-20/20 20/21	8,45
ARAM-20/22 20/32	8,15 10,1


ARAM-20/10/\*\*-WO  
ARAM-20/11/\*\*-WO

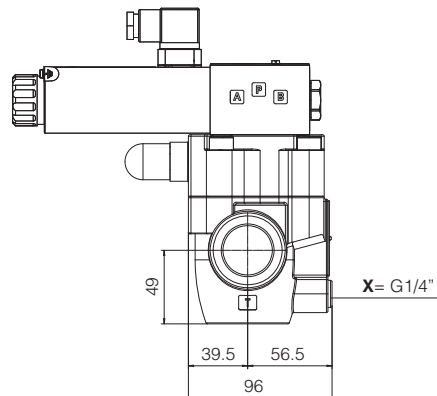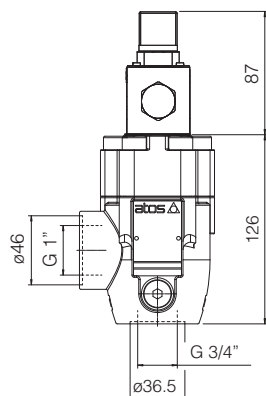


ARAM-20/20/\*\*-WO  
ARAM-20/21/\*\*-WO

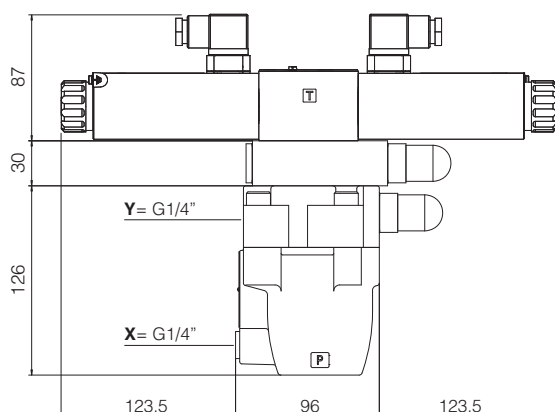


ARAM-20/22/\*\*-WO

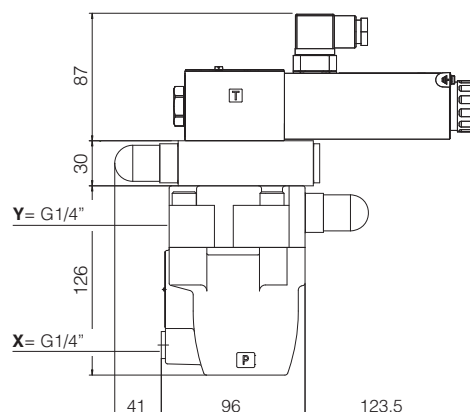


ARAM-20/32/\*\*-WO

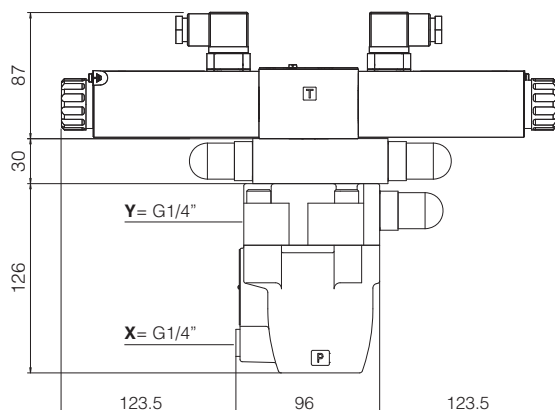


Standard



Option /WP



Option /V





## ARAM-32


**X** = port connection for external pilot (option /E)  
**Y** = port connection for external drain (option /Y)

Mass [kg]	
ARAM-32/10 32/11	7,05
ARAM-32/20 32/21	9,05
ARAM-32/22 32/32	8,55
	10,7


**ARAM-32/10/\*\*-WO**  
**ARAM-32/11/\*\*-WO**

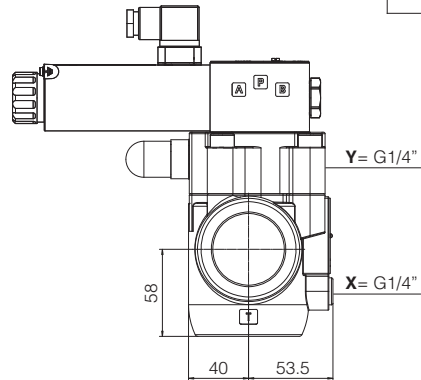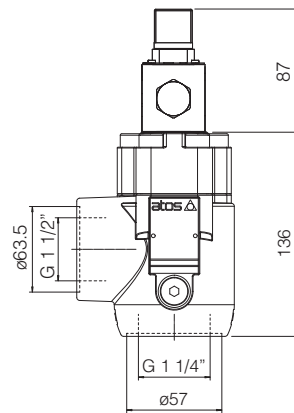


**ARAM-32/20/\*\*-WO**  
**ARAM-32/21/\*\*-WO**

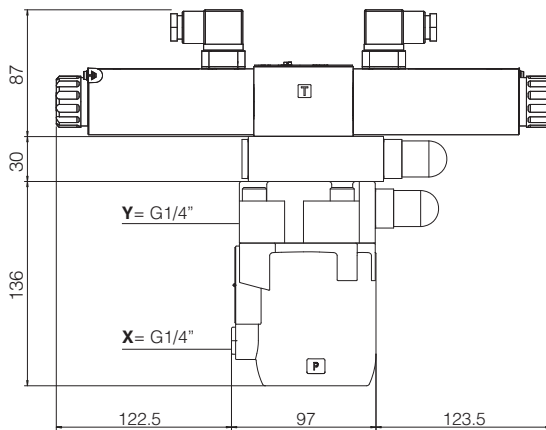


**ARAM-32/22/\*\*-WO**

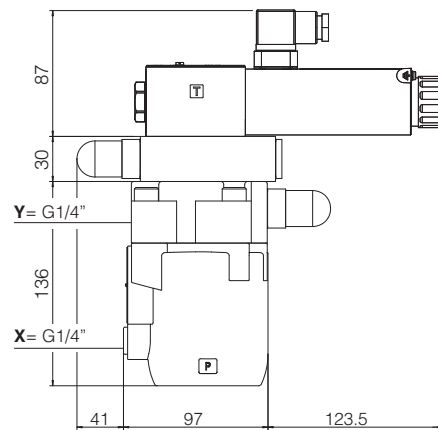


**ARAM-32/32/\*\*-WO**

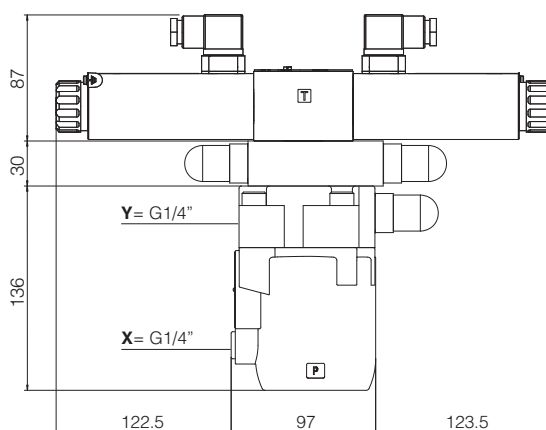


**Standard**



**Option /WP**



**Option /V**



### 15 RELATED DOCUMENTATION

- X010** Basics for electrohydraulics in hazardous environments
- X050** Summary of Atos intrinsically safe components certified to ATEX and IECEx
- EX950** Operating and maintenance information for intrinsically safe valves
- P005** Mounting surfaces for electrohydraulic valves