


Solenoid directional valves type **SDHL**

direct operated, ISO 4401 size 06, **compact execution**

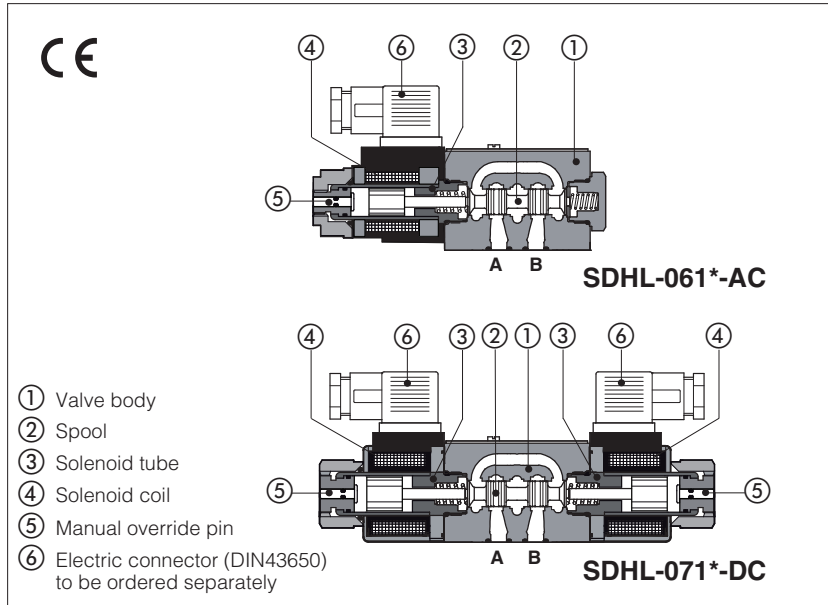

Spool type, two or three position direct operated valves size 06 in compact execution with reduced solenoids dimensions, ideal for applications in mini power packs, mobile and agricultural machines.

Solenoids are made by:

- wet type screwed tube ③, different for AC and DC power supply, with integrated manual override pin ⑤
- interchangeable coils ④, specific for AC or DC power supply, easily replaceable without tools - see section ⑤ for available voltages

Standard coils protection **IP65**

Wide range of interchangeable spools ②, see section ②.

The valve body ① is 3 chamber type made by shell-moulding casting with wide internal passages ensuring low pressure drops.

Mounting surface: **ISO 4401 size 06**

Max flow: **60 l/min**

Max pressure: **350 bar**


1 MODEL CODE

SDHL - 0 Directional control valves size 06 compact execution Valve configuration, see section ② 61 = single solenoid, center plus external position, spring centered 63 = single solenoid, 2 external positions, spring offset 67 = single solenoid, center plus external position, spring offset 71 = double solenoid, 3 positions, spring centered 75 = double solenoid, 2 external positions, with detent Spool type, see section ②. Options: A, WP , see section ⑤	61	1	/A -	X	24 DC	** Series number	/* Seals material, see section ④: - = NBR PE = FKM
---	-----------	----------	-------------	----------	--------------	----------------------------	---

Voltage code, see section ⑤

X = without connector
See section ⑦ for available connectors, to be ordered separately
Coils with special connectors, see section ⑧
XK = Deutsch connector

2 CONFIGURATIONS and SPOOLS (representation according to ISO 1219-1)

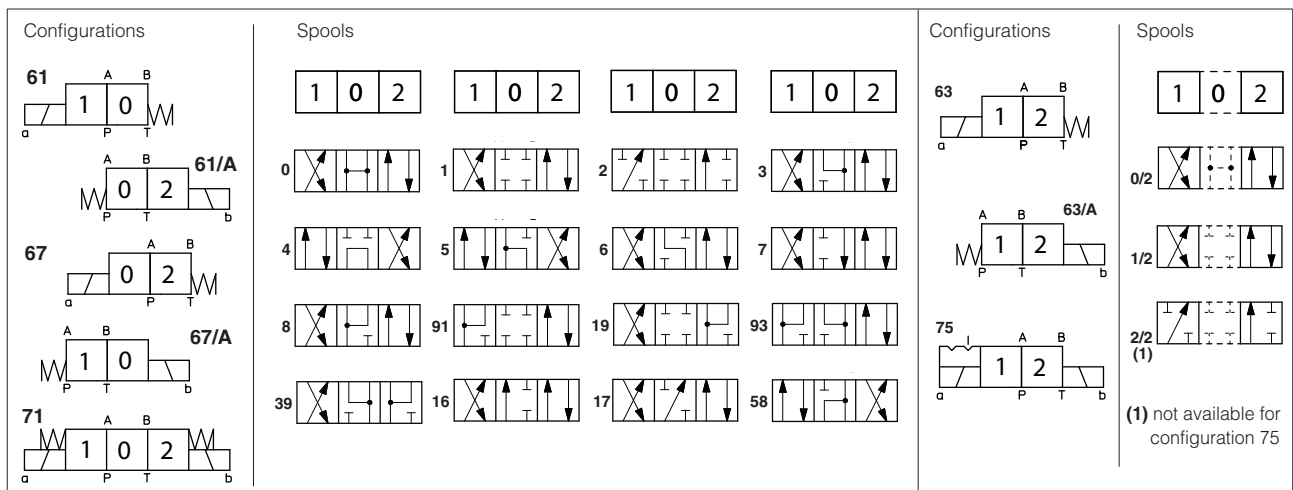

2.1 Special spools

- spools type **0** and **3** are also available as **0/1** and **3/1** with restricted oil passages in central position, from user ports to tank.
- spools type **1, 4, 5** and **58** are also available as **1/1, 4/8, 5/1** and **58/1**. They are properly shaped to reduce water-hammer shocks during the swithing.
- spools type **1, 1/2, 3, 8** are available as **1P, 1/2P, 3P, 8P** to limit valve internal leakages.
- Other types of spools can be supplied on request.

3 MAIN CHARACTERISTICS

Assembly position / location	Any position		
Subplate surface finishing	Roughness index Ra 0,4 - flatness ratio 0,01/100 (ISO 1101)		
MTTFd valves according to EN ISO 13849	150 years, see technical table P007		
Ambient temperature	Standard execution = -30°C ÷ +70°C		/PE option = -20°C ÷ +70°C
Flow direction	As shown in the symbols of table 2		
Operating pressure	Ports P,A,B: 350 bar; Port T 210 bar for DC version; 160 bar for AC version		
Maximum flow	60 l/min , see Q/Δp diagram at section 9 and operating limits at section 10		

3.1 Coils characteristics

Insulation class	H (180°C) for DC coils F (155°C) for AC coils Due to the occurring surface temperatures of the solenoid coils, the European standards EN ISO 13732-1 and EN ISO 4413 must be taken into account
Protection degree to DIN EN 60529	IP 65 (with connectors 666, 667 correctly assembled)
Relative duty factor	100%
Supply voltage and frequency	See electric feature 6
Supply voltage tolerance	± 10%

4 SEALS AND HYDRAULIC FLUID - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +80°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C		
Recommended viscosity	15 ÷ 100 mm ² /s - max allowed range 2,8 ÷ 500 mm ² /s		
Max fluid contamination level	ISO4406 class 20/18/15 NAS1638 class 9, see also filter section at www.atos.com or KTF catalog		
Hydraulic fluid	Suitable seals type	Classification	Ref. Standard
Mineral oils	NBR, FKM	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR	HFC	

5 OPTIONS

A = Solenoid mounted at side of port B (only for single solenoid valves). In standard versions, solenoid is mounted at side of port A.

WP = prolonged manual override protected by rubber cap.

⚠ The manual override operation can be possible only if the pressure at T port is lower than 50 bar

6 ELECTRIC FEATURES

External supply nominal voltage ± 10%	Voltage code	Type of connector	Power consumption (2)	Code of spare coil DHL
12 DC	12 DC	666 or 667	29W	COL-12DC
14 DC	14 DC			COL-14DC
24 DC	24 DC			COL-24DC
28 DC	28 DC			COL-28DC
110 DC	110 DC			COL-110DC
220 DC	220 DC			COL-220DC
110/50 AC (1)	110/50/60 AC		58VA (3)	COL-110/50/60AC
230/50 AC (1)	230/50/60 AC	COL-230/50/60AC		

(1) Coil can be supplied also with 60 Hz of voltage frequency: in this case the performances are reduced by 10 ÷ 15% and the power consumption is 52 VA.

(2) Average values based on tests performed at nominal hydraulic condition and ambient/coil temperature of 20°C.

(3) When solenoid is energized, the inrush current is approx 3 times the holding current.


7 ELECTRIC CONNECTORS ACCORDING TO DIN 43650 (to be ordered separately)

666 = standard connector IP-65, suitable for direct connection to electric supply source.

667 = as 666, but with built-in signal led.

666, 667 (for AC or DC supply)		CONNECTOR WIRING	
		666, 667 1 = Positive ⊕ 2 = Negative ⊖ ⊕ = Coil ground	
		SUPPLY VOLTAGES	
		666 All voltages	667 24 AC or DC 110 AC or DC 220 AC or DC

8 COILS WITH SPECIAL CONNECTORS only for voltage supply **12, 14, 24, 28 Vdc**

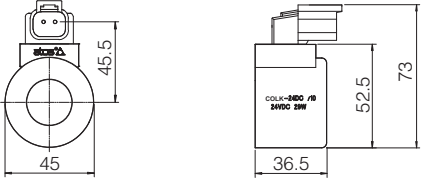

Deutsch connector DT-04-2P

Options -XK


Coil type COLK, Deutsch connector DT-04-2P male

Protection degree **IP67**

Note: For the electric characteristics refer to standard coils features - see section **6**

9 Q/ΔP DIAGRAMS based on mineral oil ISO VG 46 at 50°C


Flow direction Spool type	Flow direction				
	P→A	P→B	A→T	B→T	P→T
0, 0/1	A	A	C	C	D
1, 1/1	D	C	C	C	
3, 3/1	D	D	A	A	
4, 4/8, 5, 5/1, 58, 58/1	F	F	G	C	E
1/2, 0/2	D	D	D	D	
6, 7, 16, 17	D	D	D	D	
8	A	A	E	E	
2	D	D			
2/2	F	F			
19, 91	E	E	D	D	
39, 93	F	F	G	G	

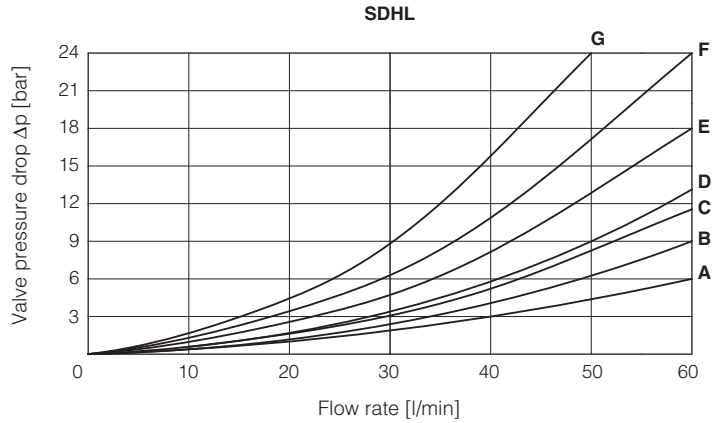


10 OPERATING LIMITS based on mineral oil ISO VG 46 at 50°C

The diagrams have been obtained with warm solenoids and power supply at lowest value ($V_{nom} - 10\%$). The curves refer to application with symmetrical flow through the valve (i.e. P→A and B→T). In case of asymmetric flow and if the valves have the devices for controlling the switching times the operating limits must be reduced.

Curve	DC version, spool type:
A	0, 0/1, 0/2, 1/2, 8
B	1, 1/1
C	3, 3/1, 6, 7
D	4, 4/8, 16, 17, 5, 5/1, 19, 39, 58, 58/1, 91, 93
E	2, 2/2

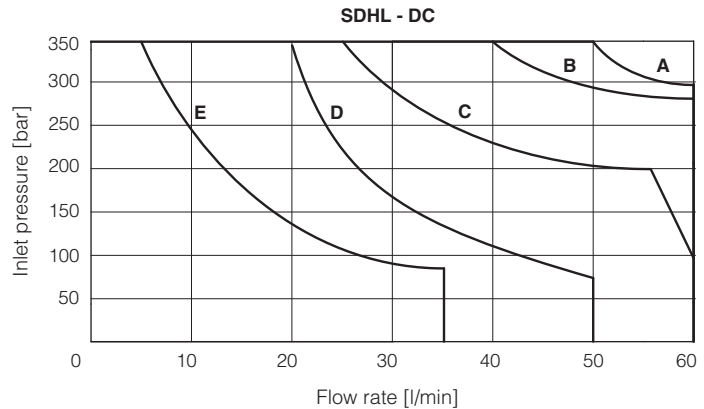

Curve	AC version, spool type:
A	0, 0/1, 0/2, 1/2, 8
B	1, 1/1
C	3, 3/1, 6, 7
D	4, 16, 17, 4/8, 5, 5/1, 19, 39, 58, 58/1, 91, 93
E	2, 2/2

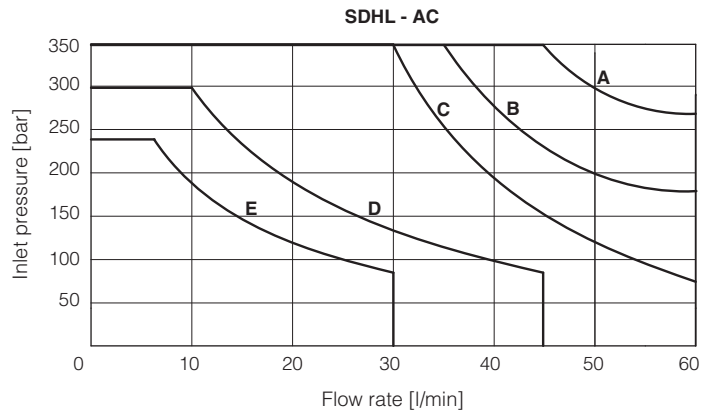

11 SWITCHING TIMES (average values in msec)

Valve	Switch-on AC	Switch-off AC	Switch-on DC	Switch-off DC
SDHL	10 - 25	20 - 40	30 - 50	15 - 25

Test conditions: - 20 l/min; 150 bar
 - nominal voltage
 - 2 bar of counter pressure on port T
 - mineral oil: ISO VG 46 at 50°C

12 SWITCHING FREQUENCY

Valve	AC (cycles/h)	DC (cycles/h)
SDHL + 666 / 667	7200	15000

The elasticity of the hydraulic circuit and the variations of the hydraulic characteristics and temperature affect the response time.

13 DIMENSIONS [mm]

ISO 4401: 2005

Mounting surface: 4401-03-02-0-05


Fastening bolts: 4 socket head screws:

M5x30 class 12.9

Tightening torque = 8 Nm


Seals: 4 OR 108

Ports P,A,B,T: $\varnothing = 7.5$ mm (max)




P = PRESSURE PORT
A, B = USE PORT
T = TANK PORT

SDHL-06(DC)




Mass: 1,3 kg

SDHL-07(DC)

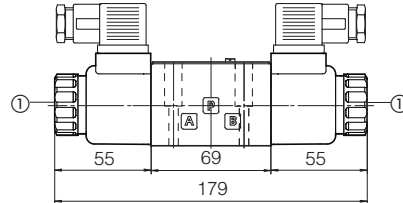


Mass: 1,6 kg

SDHL-06(AC)




Mass: 1,2 kg

SDHL-07(AC)

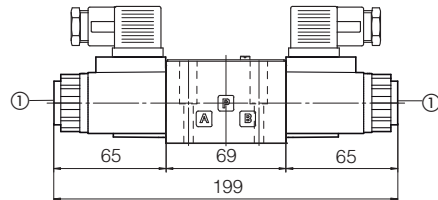


Mass: 1,4 kg

Option /WP
(DC version)



Option /WP
(AC version)



① Standard manual override PIN

⚠ The manual override operation can be possible only if the pressure at T ports is lower than 50 bar

Overall dimensions refer to valves with connector 666

14 PLUG-IN RESTRICTOR (to be ordered separately)

The use of plug-in restrictors in valve's ports P or A or B may be necessary in case of particular conditions as long flexible hoses or the presence of accumulators which could cause at the valve switching instantaneous high flow peaks over the max valve's operating limits.

Ordering code:

PLUG H - ******

08, 10, 12, 15 calibrated orifice diameter in tenths of mm

Example PLUG-H-12 = orifice diameter **1,2 mm**

Other orifice dimensions are available on request

