


Safety directional valves with spool position monitoring

On-off, piloted

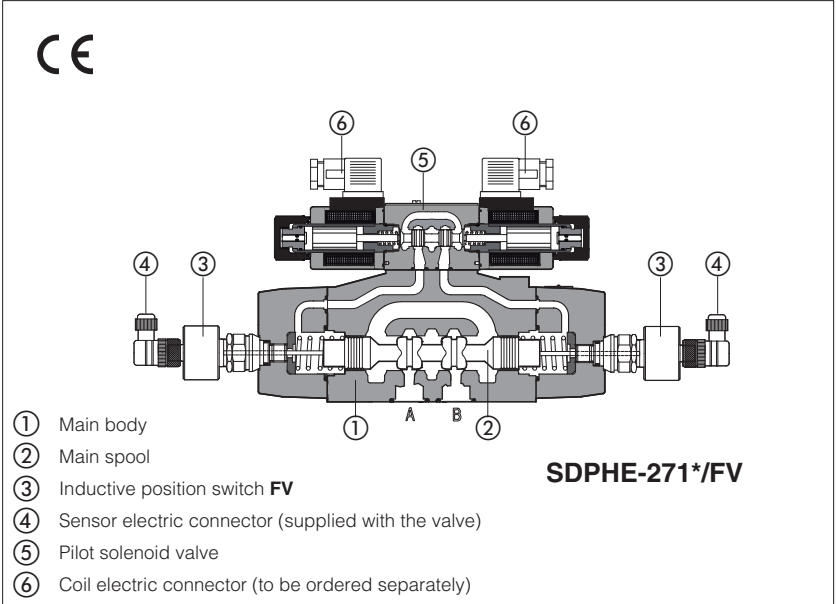

Pilot operated safety directional valves with main spool position monitoring.

SDPHE high performances, for AC and DC supply, solenoid pilot valve ⑤ type SDHE with cURus certified solenoids, see tech. table E015

The valves are equipped with **FV** inductive position switch for the main spool position monitoring, see section ⑦ for sensor's technical characteristics.

Mounting surface: **ISO 4401, size 16, 25**

Max flow: **300, 700 l/min**

Max pressure: **350 bar**

1 MODEL CODE

SDPH	E	-	2	71	1	/	A	/	FV	X	24DC	**	/	*
Pilot operated directional control valve														Seals material see sect. ③,④ - = NBR PE = FKM
Solenoid pilot valve: E = SDHE for AC and DC supply, high performances with cURus certified solenoids														Series number
Valve size, ISO 4401: 2 = 16 4 = 25														Voltage code, see section ⑦
Valve configuration, see section ②: 61 = single solenoid, center plus external position, spring centered 63 = single solenoid, 2 external positions, spring offset 67 = single solenoid, center plus external position, spring offset 71 = double solenoid, 3 positions, spring centered 75 = double solenoid, 2 external positions, with detent														Spool position monitor FV = inductive position switch (double contact)
Spool type, see section ②														Hydraulic options, see section ⑤ A, D, E, R Optional devices for main spool switching control, see section ⑥ H, H9, L9


Notes:

FV = inductive position switch providing both NO and NC contacts to be wired on the electric connector

The FV inductive position switch is directly connected to the valve main spool

In pilot operated valves only the main spool position is monitored; the pilot solenoid valve is not monitored

2 CONFIGURATIONS and SPOOLS (representation according to ISO 1219-1)

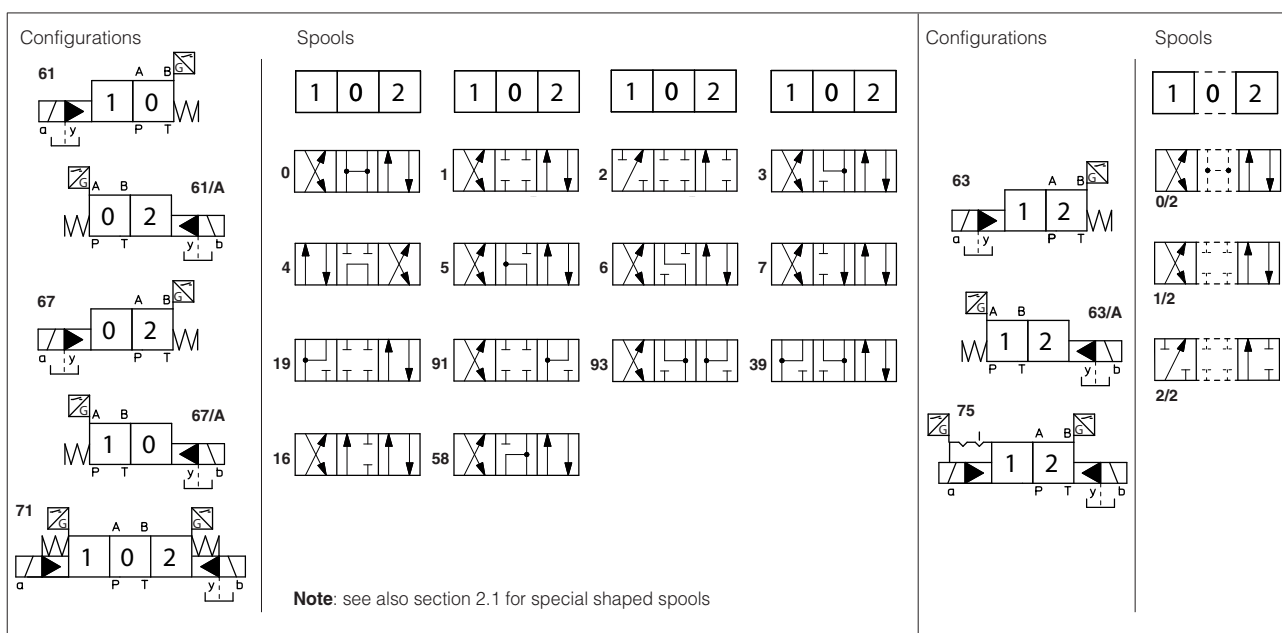

2.1 Special shaped spools

- spools type **0** and **3** are also available as **0/1** and **3/1** with restricted oil passages in central position, from user ports to tank.
- spools type **1**, **4**, **5**, **58**, **6** and **7** are also available as **1/1**, **4/8**, **5/1**, **58/1**, **6/1** and **7/1** that are properly shaped to reduce water-hammer shocks during the switching.

3 MAIN CHARACTERISTICS

Assembly position / location	Any position
Subplate surface finishing	Roughness index Ra 0,4 - flatness ratio 0,01/100 (ISO 1101)
MTTFd values according to EN ISO 13849	75 years, for further details see technical table P007
Conformity	CE to Low Voltage Directive 2014/35/EU CE to EMC directive 2014/30/EU (Immunity: EN 61000-6-2; Emission: EN 61000-6-3) RoHS Directive 2011/65/EU as last update by 2015/863/EU REACH Regulation (EC) n°1907/2006
Ambient temperature	Standard = -30°C ÷ +70°C /PE option = -20°C ÷ +70°C
Flow direction	As shown in the symbols of table 2
Operating pressure	P, A, B, X = 350 bar (for pilot pressure see also option /L9 at section 6) T = 250 bar for external drain (standard) T with internal drain (option /D) = 210 bar SDPHE (DC); 160 bar SDPHE (AC) Y = 0 bar Minimum pilot pressure for correct operation is 8 bar
Maximum flow	SDPHE-2: 300 l/min ; SDPHE-4: 700 l/min (see Q/Δp diagrams at section 12 and operating limits at section 13)

3.1 Coils characteristics

Insulation class	H (180°C) for DC coils F (155°C) for AC coils Due to the occurring surface temperatures of the solenoid coils, the European standards EN ISO 13732-1 and EN ISO 4413 must be taken into account
Protection degree to DIN EN 60529	IP 65 (with connectors correctly assembled)
Relative duty factor	100%
Supply voltage and frequency	See electric features 7
Supply voltage tolerance	± 10%
Certification	cURus North American standard

4 SEALS AND HYDRAULIC FLUID - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = $-20^{\circ}\text{C} \div +80^{\circ}\text{C}$, with HFC hydraulic fluids = $-20^{\circ}\text{C} \div +50^{\circ}\text{C}$ FKM seals (/PE option) = $-20^{\circ}\text{C} \div +80^{\circ}\text{C}$		
Recommended viscosity	15 ÷ 100 mm ² /s - max allowed range 2,8 ÷ 500 mm ² /s		
Max fluid contamination level	ISO4406 class 20/18/15 NAS1638 class 9, see also filter section at www.atos.com or KTF catalog		
Hydraulic fluid	Suitable seals type	Classification	Ref. Standard
Mineral oils	NBR, FKM	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR	HFC	

5 HYDRAULIC OPTIONS

5.1 option /A = Solenoid mounted at side of port A of main body (only for single solenoid valves)

In standard version the solenoid is mounted at side of port B

For sensor position, see sect [16](#)

5.2 option /D = Internal drain (standard configuration is external drain)




5.3 option /E = External pilot pressure (standard configuration is internal pilot pressure)

5.4 option /R = Pilot pressure generator (4 bar on port P - not for DPH*-1)

The device **/R** generates an additional pressure drop, in order to ensure the minimum pilot pressure, for correct operation of the valves with internal pilot and fitted with spools type **0, 0/1, 4, 4/8, 5, 58, 09, 90, 94, 49**.

The device **/R** has to be fitted when the pressure drop in the valve, verified on flow versus pressure diagrams, is lower than the minimum pilot pressure value.

Pressure drop through the pilot pressure generator /R

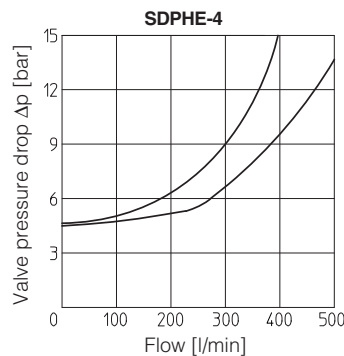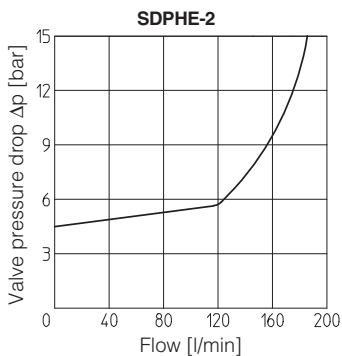

- ① Flapper-guide ③ Spring stop-washer
- ② Flapper ④ Spring

Ordering code of spare pilot pressure generator

R/DP	-	*
Pilot pressure generator		Size: 2 for SDPHE-2 4 for SDPHE-4

WARNING: the manual operation is not permitted for safety valves, than the valve is provided with solenoid blind rings to prevent the access to the manual override. The manual override protected by rubber cup (option /WP) is not available



WARNING: the inobservance of following prescriptions invalidates the certification and may represent a risk for personnel injury

Safety valves must be installed and commissioned only by qualified personnel

Safety valves must not be disassembled

The inductive position switch FV can be adjusted only by the valve's manufacturer or Atos authorized service centers

Valve's components cannot be interchanged

The valves must operate without switching shocks and spool vibrations



6 DEVICES FOR MAIN SPOOL SWITCHING CONTROL

Following options are suggested to reduce the hydraulic shocks at the valve operation

6.1 option /H = Adjustable chokes (meter-out to the pilot chambers of the main valve)

6.2 option /H9 = Adjustable chokes (meter-in to the pilot chambers of the main valve)

6.3 option /L9 = Plug with calibrated restrictor in P port of pilot valve, suggested in case of pilot pressure higher than 210 bar or to limit the hydraulics shocks caused by the fast main spool switching


Plug code:

PLUG-12A ø1,2 mm for SDP*-2

PLUG-15A ø1,5 mm for SDP*-4

FUNCTIONAL SCHEME (config. 71)

example of switching control options


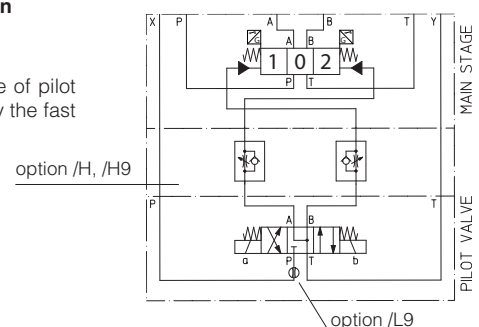


7 COIL VOLTAGE


Valve code	External supply nominal voltage $\pm 10\%$	Voltage code	Type of connector	Power consumption (2)	Code of spare coil DHE
SDPHE	12 DC	12 DC	666 or 667	30 W	COE-12DC
	14 DC	14 DC			COE-14DC
	24 DC	24 DC			COE-24DC
	28 DC	28 DC			COE-28DC
	110 DC	110 DC			COE-110DC
	220 DC	220 DC			COE-220DC
	110/50 AC	110/50/60 AC		58 VA	COE-110/50/60AC (1)
	230/50 AC	230/50/60 AC			COE-230/50/60AC (1)
	110/50 AC - 120/60 AC	110 RC	669	30 W	COE-110RC
	230/50 AC - 230/60 AC	230 RC			COE-230RC

- (1) Coil can be supplied also with 60 Hz of voltage frequency: in this case the performances are reduced by $10 \div 15\%$ and the power consumption is 52 VA.
(2) Average values based on tests performed at nominal hydraulic condition and ambient/coil temperature of 20°C.
(3) When solenoid is energized, the inrush current is approx 3 times the holding current.


8 COILS ELECTRIC CONNECTORS according to din 43650 (to be ordered separately)

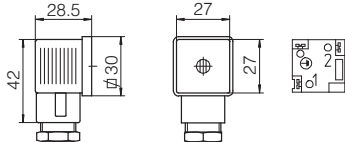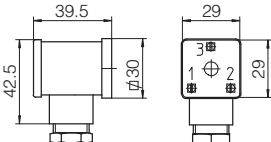666, 667 (for AC or DC supply)	669 (for AC supply)	CONNECTOR WIRING	
		666, 667 1 = Positive \oplus 2 = Negative \ominus \oplus = Coil ground	669 1,2= Supply voltage VAC 3 = Coil ground
		SUPPLY VOLTAGES	
666 All voltages	667 24 AC or DC 110 AC or DC 220 AC or DC	669 110/50 AC 110/60 AC 230/50 AC 230/60 AC	

9 TECHNICAL CHARACTERISTICS OF FV INDUCTIVE POSITION SWITCH

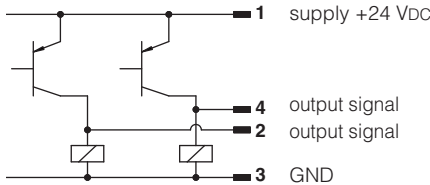Type of switch	contactless inductive position switch with integrated amplifier	
Supply voltage [V]	20÷32	
Ripple max [%]	≤ 10	
Max current [mA]	400	
Reaction time [ms]	15	
Max peak pressure [bar]	400	
Mechanical life	virtually infinite	
Switch logic	PNP	

10 CONNECTING SCHEME OF FV INDUCTIVE POSITION SWITCH

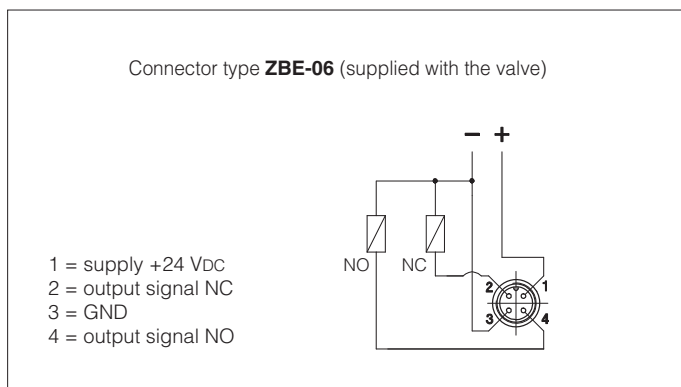

Note: the /FV position switch is not provided with a protective earth connection

11 STATUS OF OUTPUT SIGNAL



SDPHE	Configuration 61 monitored position "0"	Configuration 63 monitored position "2"	Configuration 67 monitored position "2"	Configuration 71 monitored position "0"	Configuration 75 monitored position "2"
Hydraulic configuration					
spool position					
sensor	pin 2	ON	ON	ON	ON
	pin 4	OFF	OFF	OFF	OFF
sensor side a	pin 2	ON	ON	ON	ON
	pin 4	OFF	OFF	OFF	OFF
sensor side b	pin 2	ON	ON	ON	ON
	pin 4	OFF	OFF	OFF	OFF

Note:

FV position switch can be electrically wired by the customer as NO or NC and then the status of the output signal will be in accordance to the selected configuration

= intermediate spool position corresponding to the hydraulic configuration change

12 Q/Δp DIAGRAMS based on mineral oil ISO VG 46 at 50°C

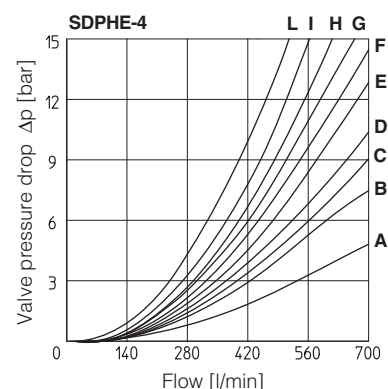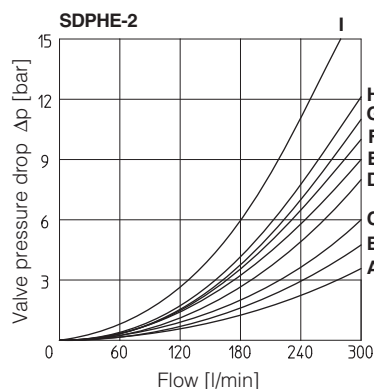

SDPHE-2

Flow direction	P→A	P→B	A→T	B→T	P→T
Spool type					
0/2, 1, 3, 6, 7, 8	A	A	D	A	-
1/1, 1/2, 7/1	B	B	D	E	-
0	A	A	D	E	C
0/1	A	A	D	-	-
2	A	A	-	-	-
2/2	B	B	-	-	-
3/1	A	A	D	D	-
4	C	C	H	I	F
4/8	C	C	G	I	F
5	A	B	F	H	G
5/1	A	B	D	F	-
6/1	B	B	C	E	-
09	A	-	-	G	-
16	A	C	D	F	-
17	C	A	E	F	-
19	C	-	-	G	-
39	C	-	-	H	-
49	-	D	-	-	-
58	B	A	F	H	H
58/1	B	A	D	F	-
90	A	A	E	-	D
91	C	C	E	-	-
93	-	C	D	-	-
94	D	-	-	-	-

SDPHE-4

Flow direction	P→A	P→B	A→T	B→T	P→T
Spool type					
1	B	B	B	D	-
1/1	D	E	E	F	-
1/2	E	D	B	C	-
0	D	C	D	E	F
0/1, 3/1, 5/1, 6, 7	D	D	D	F	-
0/2	D	D	D	E	-
2	B	B	-	-	-
2/2	E	D	-	-	-
3	B	B	D	F	-
4	C	C	H	L	L
5	A	D	D	D	H
6/1	D	E	D	F	-
7/1	D	E	F	F	-
8	D	D	E	F	-
09	D	-	-	F	F
16	C	D	E	F	-
17	E	D	E	F	-
19	F	-	-	E	-
39	G	F	-	F	-
58	E	A	B	F	H
58/1	E	D	D	F	-
90	D	D	D	-	F
91	F	F	D	-	-
93	-	G	D	-	-

- 13 OPERATING LIMITS** based on mineral oil ISO VG 46 at 50°C
For a correct valve operation do not exceed the max recommended flow rates (l/min) shown in the below tables

SDPHE-2

Spool	Inlet pressure [bar]			
	70	140	210	350
	Flow rate [l/min]			
0, 1, 3, 6, 7, 8	300	300	300	300
2, 4, 4/8	300	300	240	140
5	260	220	180	100
0/1, 0/2, 1/2	300	250	210	180
16, 17, 56, *9, 9*	300	300	270	200

SDPHE-4

Spool	Inlet pressure [bar]			
	70	140	210	350
	Flow rate [l/min]			
1, 6, 7, 8	700	700	700	600
2, 4, 4/8	500	500	450	400
5, 0/1, 0/2, 1/2	600	520	400	300
0, 3	700	700	600	540
16, 17, 58, *9, 9*	500	500	500	450

- 14 SWITCHING TIMES** (average values in m sec)

TEST CONDITIONS:

- Nominal voltage supply DC (direct) and AC (alternating) with connector type SP-666. The use of other connectors can affect the switching time;
- 2 bar of counter pressure on port T;
- mineral oil: ISO VG 46 at 50°C


Piloting pressure		70 bar		140 bar		250 bar	
Valve model		Alternating current	Direct current	Alternating current	Direct current	Alternating current	Direct current
SDPHE-2	Switch ON	40÷55	55÷80	30÷45	50÷70	20÷35	40÷55
	Switch OFF	60÷95					
SDPHE-4	Switch ON	60÷95	80÷115	45÷75	60÷95	30÷50	45÷65
	Switch OFF	80÷130					

- 15 PLUGS LOCATION FOR PILOT/DRAIN CHANNELS**


Depending on the position of internal plugs, different pilot/drain configurations can be obtained as shown below.
To modify the pilot/drain configuration, proper plugs must only be interchanged. The plugs have to be sealed using loctite 270.
Standard valves configuration provides internal pilot and external drain

SDPHE-2

Pilot channels

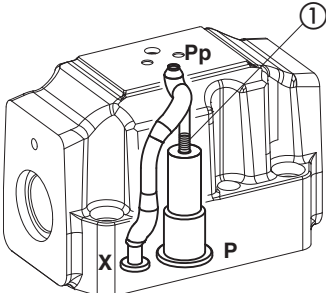


Drain channels

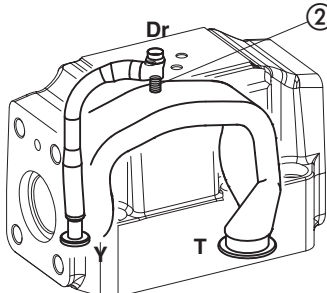

Internal piloting: Without blinded plug SP-X300F ①;
External piloting: Add blinded plug SP-X300F ①;
Internal drain: Without blinded plug SP-X300F ②;
External drain: Add blinded plug SP-X300F ②.


Option L9
This option provides a calibrated restrictor PLUG-H-12A (Ø 1,2 mm) in the P port of the pilot valve




PLUG-12A

SDPHE-4

Pilot channels

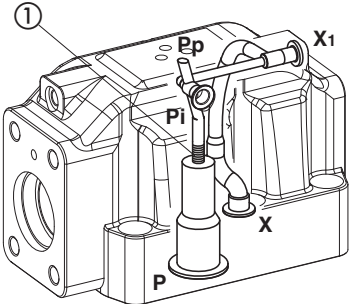


Drain channels

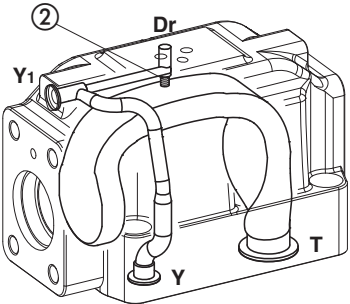

Internal piloting: Without blinded plug SP-X500F ①;
External piloting: Add blinded plug SP-X500F ①;
Internal drain: Without blinded plug SP-X300F ②;
External drain: Add blinded plug SP-X300F ②.

Option L9
This option provides a calibrated restrictor PLUG-H-15A (Ø 1,5 mm) in the P port of the pilot valve



PLUG-15A

SDPHE-2*/FV

ISO 4401: 2005

Mounting surface: 4401-07-07-0-05

Fastening bolts:

4 socket head screws M10x50 class 12.9

Tightening torque = 70 Nm


2 socket head screws M6x45 class 12.9

Tightening torque = 15 Nm

Diameter of ports A, B, P, T: $\varnothing = 20$ mm;

Diameter of ports X, Y: $\varnothing = 7$ mm;



Seals: 4 OR 130, 2 OR 2043

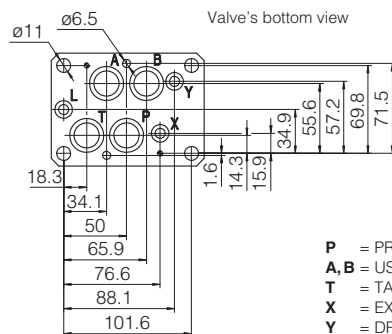


Valve's bottom view

Mass (Kg)	
SDPHE-26	10,2
SDPHE-27	10,9
Option H, H9	+1,0


P = PRESSURE PORT
A, B = USE PORT
T = TANK PORT
X = EXTERNAL OIL PILOT PORT
Y = DRAIN PORT

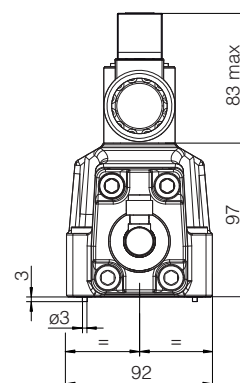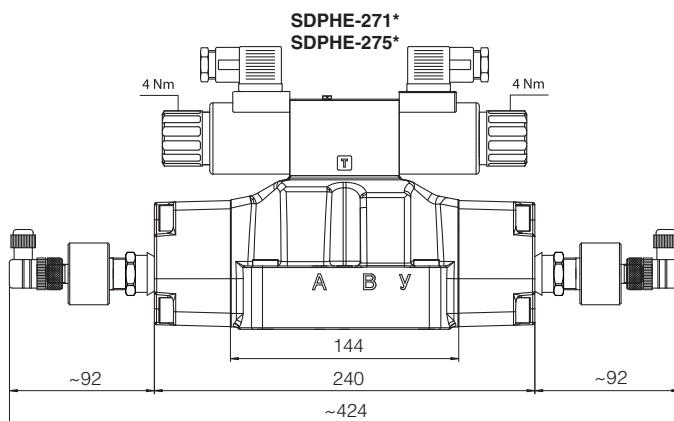


SDPHE-261*

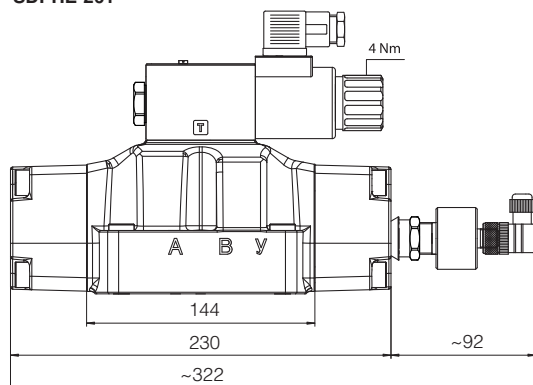


SDPHE-261*/A

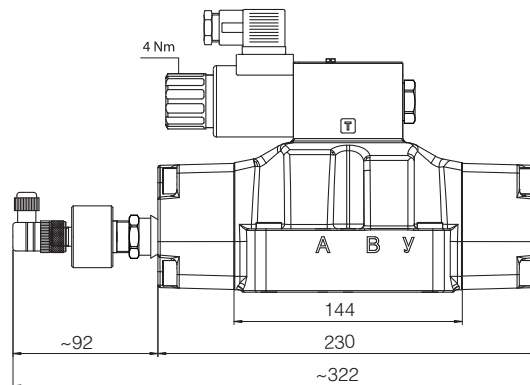

SDPHE-263*
SDPHE-267*

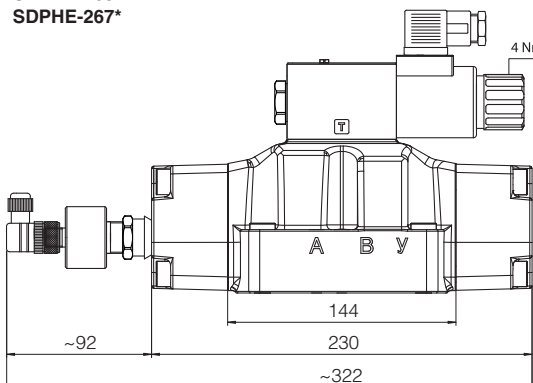

SDPHE-263*/A
SDPHE-267*/A

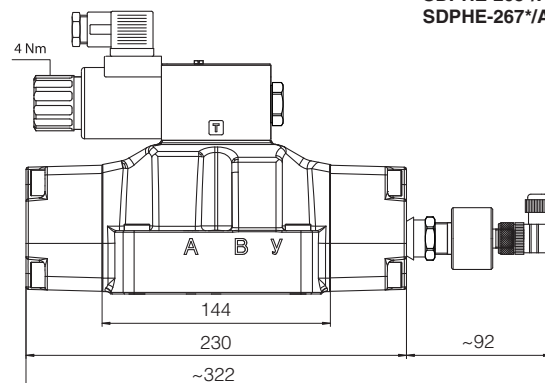

SDPHE-4*/FV

ISO 4401: 2005

Mounting surface: 4401-08-08-0-05

Fastening bolts:


6 socket head screws M12x60 class 12.9

Tightening torque = 125 Nm

Diameter of ports A, B, P, T: $\varnothing = 24$ mm;

Diameter of ports X, Y: $\varnothing = 7$ mm;

Seals: 4 OR 4112, 2 OR 3056

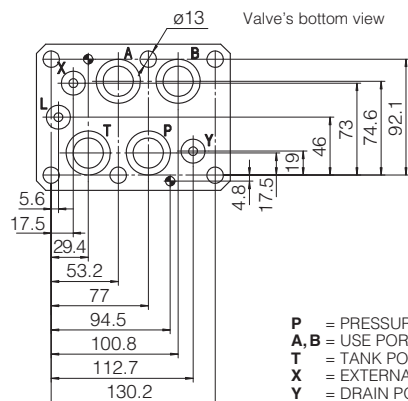


Valve's bottom view


Mass (Kg)	
SDPHE-46	17,7
SDPHE-47	18,4
Option H, H9	+1,0

P = PRESSURE PORT
A, B = USE PORT
T = TANK PORT
X = EXTERNAL OIL PILOT PORT
Y = DRAIN PORT


SDPHE-471*
SDPHE-475*

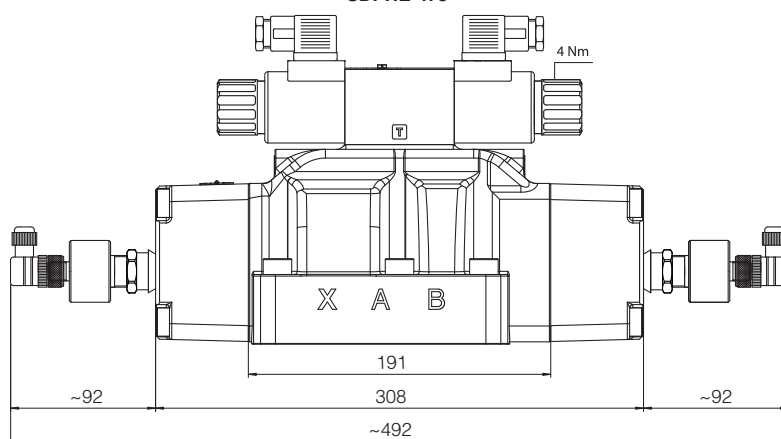


SDPHE-461*

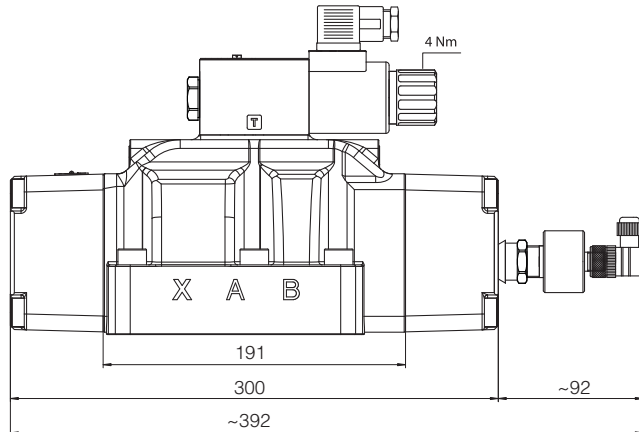

SDPHE-461*/A

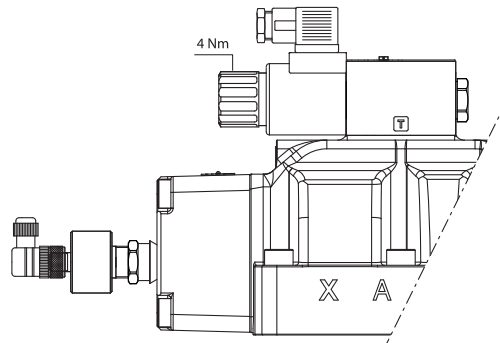

SDPHE-463*
SDPHE-467*

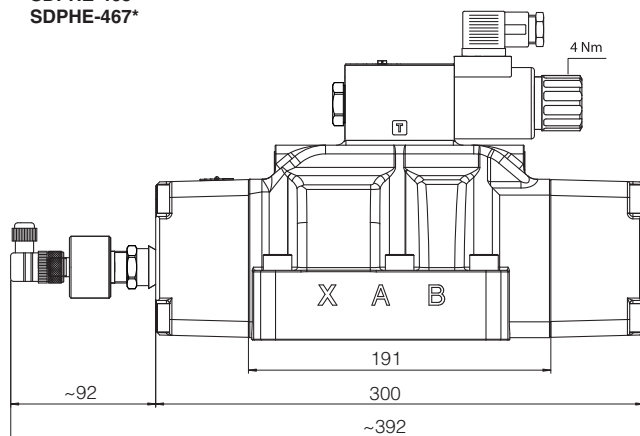

SDPHE-463*/A
SDPHE-467*/A

