


## Safety modular valves with spool position monitoring

On-off, direct, conforming to Machine Directive 2006/42/EC - certified by 

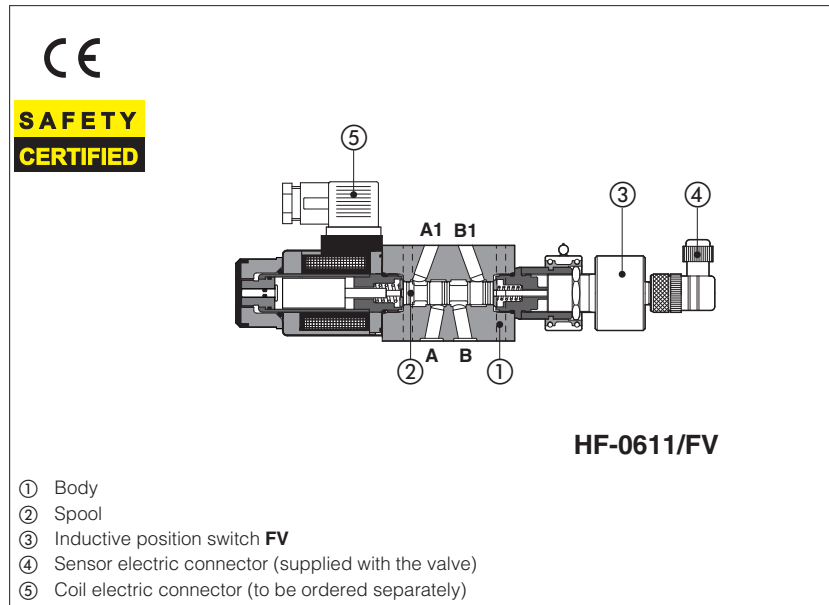

**HF** are spool type, direct operated solenoid valves in modular execution, normally used for safety functions to shut-off or to by-pass the hydraulic user lines.

They are provided with **FV** inductive position switch for spool position monitoring, **CE** marked and certified by **TÜV** in accordance with safety requirements of Machine Directive 2006/42/EC.

The modular execution permits to make compact functional circuits, by the stack mounting with other modular valves and solenoid valves size 06.

### Applications

Synco press brakes, vertical presses, plastic injection, ceramic presses.

### Certification

The **TÜV** certificate can be downloaded from [www.atos.com](http://www.atos.com), catalog on line, technical information section.

Mounting Surface: **ISO 4401 size 06**


Max flow: **60 l/min**

Max pressure: **350 bar**

### 1 MODEL CODE

<b>HF-0</b>	<b>61</b>	<b>1</b>	<b>/ A</b>	<b>/ FV</b>	<b>- E</b>	<b>X</b>	<b>24DC</b>	<b>**</b>	<b>/*</b>
Modular directional valve size 06								Series number	Seals material, see section 4: - = NBR <b>PE</b> = FKM
<b>Valve configuration</b> , see section 2 <b>61</b> = single solenoid, central plus external position, spring centered <b>67</b> = single solenoid, central plus external position, spring offset									
<b>Spool type</b> : <b>1, 3, 4</b> see section 2									
<b>Options</b> : <b>A</b> = solenoid mounted at side of port B <b>B</b> = orientation of coil and proximity connectors rotated of 180°									
<b>Optional spool position monitor</b> : <b>FV</b> = inductive position switch (only for HF-0611, HF-0614, HF-0673)									
							<b>Voltage code</b> , see section 7		
							<b>X</b> = without connector See section 4 for available connectors, to be ordered separately		
							<b>E</b> = solenoid OE for AC and DC supply		

### 2 CONFIGURATION

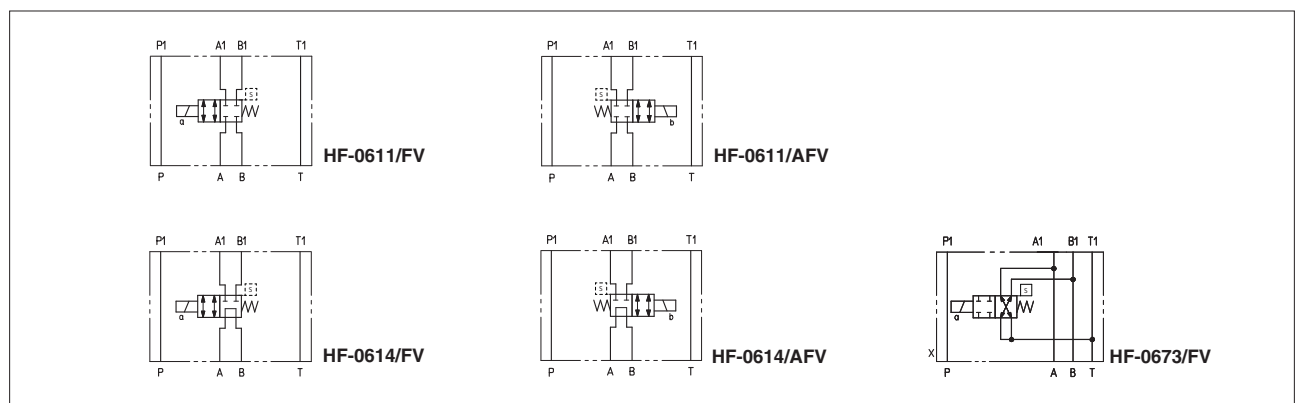

## 3

**(1)** The type-examination certificate can be download from [www.atos.com](http://www.atos.com)




### 3.1

## 4

S

## 5

**B** = Orientation of coil and proximity connectors rotated of 180°



## 6

Not

## 7 ELECTRIC FEATURES

External supply nominal voltage ± 10%	Voltage code	Type of connector	Power consumption (2)	Code of spare coil
12 DC	12 DC	666 or 667	30 W	COE-12DC
14 DC	14 DC			COE-14DC
24 DC	24 DC			COE-24DC
28 DC	28 DC			COE-28DC
48 DC	48 DC			COE-48DC
110 DC	110 DC			COE-110DC
125 DC	125 DC			COE-125DC
220 DC	220 DC			COE-220DC
110/50 AC	110/50/60 AC		58 VA (3)	COE-110/50/60AC (1)
230/50 AC	230/50/60 AC		58 VA (3)	COE-230/50/60AC (1)
115/60 AC	115/60 AC	669	80 VA (3)	COE-115/60AC
230/60 AC	230/60 AC		80 VA (3)	COE-230/60AC
110/50 AC - 120/60 AC	110 RC		30 W	COE-110RC
230/50 AC - 230/60 AC	230 RC			COE-230RC

(1) Coil can be supplied also with 60 Hz of voltage frequency: in this case the performances are reduced by 20 ±25% and the power consumption is 52 VA.


(2) Average values based on tests performed at nominal hydraulic condition and ambient/coil temperature of 20°C.

(3) When solenoid is energized, the inrush current is approx 3 times the holding current.

## 8 TECHNICAL CHARACTERISTICS OF FV INDUCTIVE POSITION SWITCH

Type of switch	contactless inductive position switch with integrated amplifier	
Supply voltage [V]	20÷32	
Ripple max [%]	10	
Max current [mA]	400	
Reaction time [ms]	15	
Max peak pressure [bar]	400	
Mechanical life	virtually infinite	
Switch logic	PNP	

## 9 CONNECTING SCHEME OF FV INDUCTIVE POSITION SWITCH

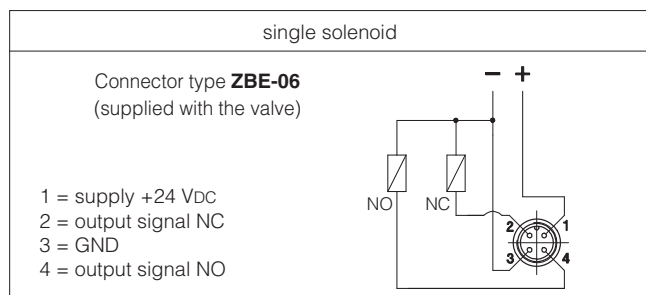

**Note:** the /FV position switch is not provided with a protective earth connection

## 10 STATUS OF OUTPUT SIGNAL FOR MODULAR VALVES WITH /FV INDUCTIVE POSITION SWITCH


Hydraulic configuration		Configuration 611	Configuration 614	Configuration 673
spool position				
pin 2	ON			
	OFF			
pin 4	ON			
	OFF			

**Note:** FV position switch can be electrically wired by the customer as NO or NC and then the status of the output signal will be in accordance to the selected configuration

= intermediate spool position corresponding to the hydraulic configuration change

# 11 Q/ΔP DIAGRAMS based on mineral oil ISO VG 46 at 50°C


Flow direction Spool type	A A1	B B1	A B	A1 T	B1 T
HF-0611	1	2			
HF-0614	1	2	3		
HF-0673	3	3		4	4

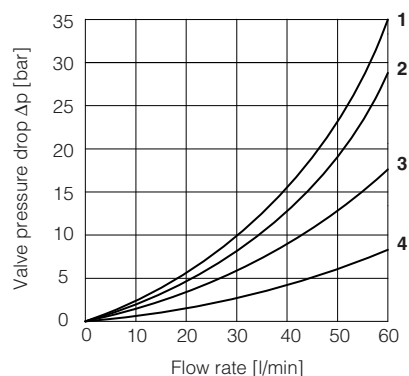


# 12 OPERATING LIMITS based on mineral oil ISO VG 46 at 50°C

The diagrams have been obtained with warm solenoids and power supply at lowest value ( $V_{nom} - 10\%$ )

Valve type	Curve
HF-0611	<b>A</b>
HF-0614, HF-0673	<b>B</b>


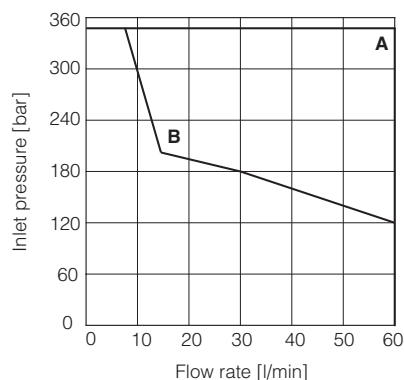


# 13 DIMENSIONS [mm]

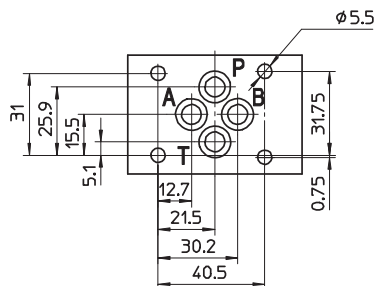

ISO 4401: 2005  
Mounting surface: 4401-03-02-0-05  
Seals: 4 OR 108  
Ports P, A, B, T:  $\varnothing = 7.5$  mm (max).

HF-0611/FV  
HF-0614/FV  
HF-0673/FV

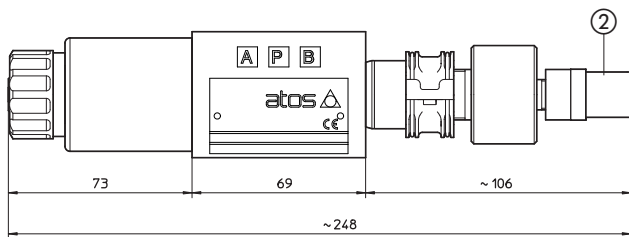

- ① = Power supply connector code 666, 667 or 669, to be ordered separately
- ② = Inductive position switch connector code ZBE-06, supplied with the valve