


# Proportional directional valves high performance

direct, with LVDT transducer and positive spool overlap

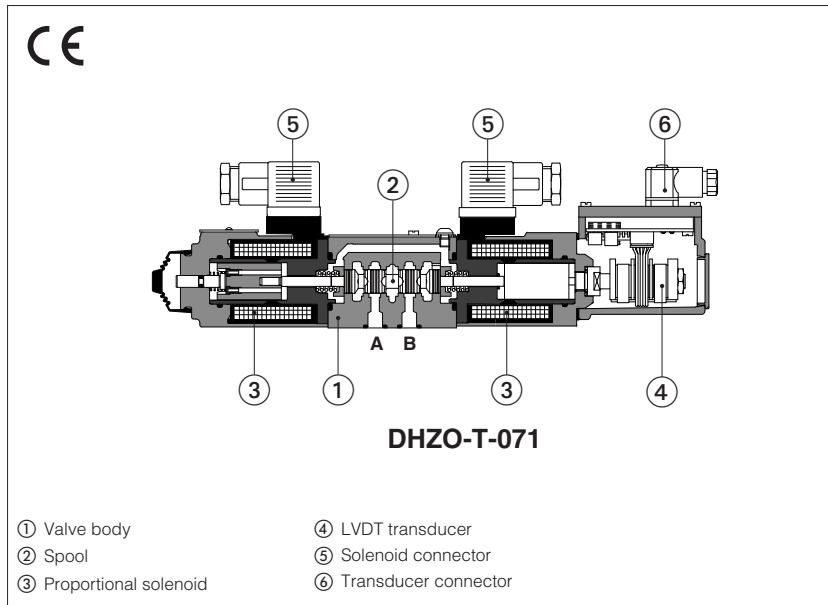

## DHZO-T, DKZOR-T

Proportional directional valves, direct, with LVDT position transducer and positive spool overlap for best dynamics in directional controls and not compensated flow regulations.

The valves operate in association with digital off-board drivers, see section 3.

The LVDT transducer grants very high regulation accuracy and response sensitivity. With de-energized proportional solenoids, mechanical central position of the spool is performed by centering springs.

Spools regulation characteristics:

L = linear

S = progressive, for fine low flow control

D = differential-progressive, for control of actuators with area ratio 1:2

Q5 and Q6 = for P/Q control

### DHZO:

Size: **06** - ISO 4401

Max flow: **80 l/min**

Max pressure: **350 bar**

### DKZOR:

Size: **10** - ISO 4401


Max flow: **180 l/min**

Max pressure: **315 bar**

## 1 MODEL CODE OF STANDARD SPOOLS

<b>DHZO</b>	-	<b>T</b>	-	<b>0</b>	<b>71</b>	-	<b>L</b>	<b>5</b>	/	<b>*</b>	/	<b>*</b>	
<b>DHZO</b> = size 06 <b>DKZOR</b> = size 10												<b>Seals material,</b> see section 7 : - = NBR <b>PE</b> = FKM <b>BT</b> = HNBR	
<b>T</b> = with LVDT transducer												Series number	
<b>Valve size ISO 4401:</b> <b>0</b> = 06 <b>1</b> = 10													

### Configuration:

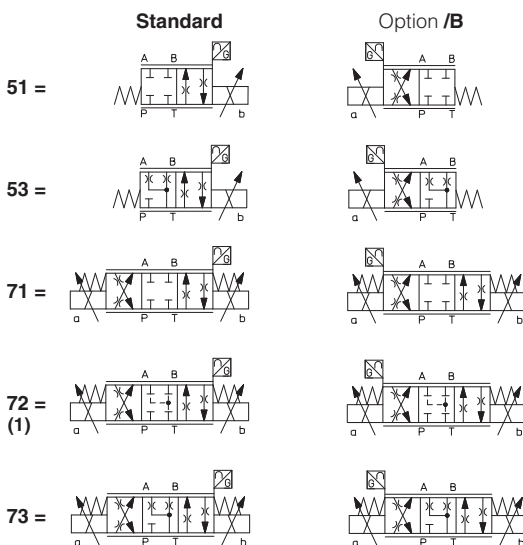

### Hydraulic options (2):

**B** = solenoid and LVDT transducer at side of port A  
**Y** = external drain

### Spool size: 14 (L) 1 (L) 2 (S) 3 (L,S,D) 5 (L,S,D)

DHZO = 1    4,5    8    18    28

DKZOR = -    -    -    45    75

Nominal flow (l/min) at Δp 10bar P-T

### Spool type, regulating characteristics (3):

**L** = linear



**S** = progressive



**D** = differential-progressive



P-A = Q, B-T = Q/2

P-B = Q/2, A-T = Q

(1) Only for **DKZOR-\*-S5** the spool overlapping type 2 provides the same characteristic of type 1, but in central position the internal leakages from P to A and B are drained to tank, avoiding the drift of cylinders with differential areas


(2) Possible combined options: /BY

(3) Spools for P/Q control, see section 2

**2 MODEL CODE OF SPOOLS FOR ALTERNATED P/Q CONTROL** - for valve model code and options, see section **1**



**DHZO** - **T** - **0** **73 - V9** / \* \* \*

**Configuration and spool:**

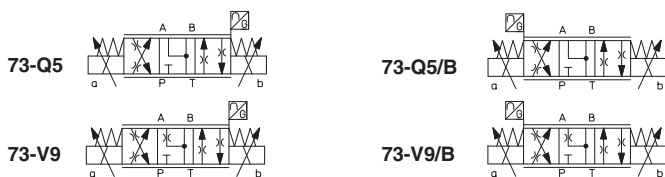

<b>Spool size:</b>	<b>Q5</b>	<b>V9</b>
DHZO =	30	30
DKZOR =	75	75

Nominal flow (l/min) at Δp 10 bar P-T



**3 OFF-BOARD ELECTRONIC DRIVERS**

Please include in the driver order also the complete code of the connected proportional valve.

Drivers model	E-BM-TEB	E-BM-TES
Type	digital	digital
Format	DIN-rail panel	DIN-rail panel
Tech table	GS230	GS240

**4 GENERAL CHARACTERISTICS**

Assembly position	Any position
Subplate surface finishing to ISO 4401	Acceptable roughness index: Ra ≤ 0,8, recommended Ra 0,4 – Flatness ratio 0,01/100
MTTFd valves according to EN ISO 13849	150 years, see technical table P007
Ambient temperature range	<b>Standard</b> = -20°C ÷ +60°C <b>/PE</b> option = -20°C ÷ +60°C <b>/BT</b> option = -40°C ÷ +60°C
Storage temperature range	<b>Standard</b> = -20°C ÷ +70°C <b>/PE</b> option = -20°C ÷ +70°C <b>/BT</b> option = -40°C ÷ +70°C
Surface protection	Zinc coating with black passivation
Corrosion resistance	Salt spray test (EN ISO 9227) > 200 h
Compliance	CE according to EMC directive 2014/30/EU (Immunity: EN 61000-6-2; Emission: EN 61000-6-3) RoHS Directive 2011/65/EU as last update by 2015/863/EU REACH Regulation (EC) n°1907/2006

**5 HYDRAULIC CHARACTERISTICS** - based on mineral oil ISO VG 46 at 50 °C

Valve model	DHZO						DKZOR					
	ports P, A, B = 350; T = 210 (250 with external drain /Y) Y = 10						ports P, A, B = 315; T = 210 (250 with external drain /Y) Y = 10					
Configuration	<b>51, 53, 71, 73</b>						<b>73</b>	<b>51, 53, 71, 73</b>		<b>72</b>	<b>73</b>	
Spool type	standard	<b>L14</b>	<b>L1</b>	<b>S2</b>	<b>L3,S3,D3</b>	<b>L5,S5,D5</b>		<b>L3,S3,D3</b>	<b>L5,S5,D5</b>	<b>S5</b>		
	P/Q							<b>Q5,V9</b>				<b>Q5,V9</b>
Nominal flow	Δp= 10 bar	1	4,5	8	18	28	30	45	75	75	75	
Δp P-T [l/min] <b>(1)</b>	Δp= 30 bar	1,7	8	14	30	50	52	80	130	130	130	
	Δp= 70 bar	2,6	12	21	45	75	80	120	170	170	170	
Max permissible flow <b>(2)</b>		4	18	30	50	80	80	130	180	180	180	
Leakage [cm³/min]		<30 (at p = 100 bar); <135 (at p = 350 bar)						<80 (at p = 100 bar); <600 (at p = 315 bar)				
Response time <b>(3)</b> [ms]		≤ 15						≤ 20				
Hysteresis		≤ 0,2 [% of max regulation]										
Repeatability		± 0,1 [% of max regulation]										
Thermal drift		zero point displacement < 1% at ΔT = 40°C										

**(1)** For different Δp, the max flow is in accordance to the diagrams in section 8.2

**(2)** See detailed diagrams in section 8.3

**(3)** 0-100% step signal

**6 ELECTRICAL CHARACTERISTICS**







Max power consumption	30 W	
Max. solenoid current	<b>DHZO</b> = 2,6 A	<b>DKZOR</b> = 3 A
Coil resistance R at 20°C	<b>DHZO</b> = 3 ÷ 3,3 Ω	<b>DKZOR</b> = 3,8 ÷ 4,1 Ω
Insulation class	H (180°) Due to the occurring surface temperatures of the solenoid coils, the European standards ISO 13732-1 and EN982 must be taken into account	
Protection degree to DIN EN60529	IP65 with mating connectors	
Duty factor	Continuous rating (ED=100%)	

**7 SEALS AND HYDRAULIC FLUIDS** - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +80°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	20÷100 mm <sup>2</sup> /s - max allowed range 15 ÷ 380 mm <sup>2</sup> /s		
Max fluid contamination level	normal operation	ISO4406 class 18/16/13 NAS1638 class 7	see also filter section at <a href="http://www.atos.com">www.atos.com</a> or KTF catalog
	longer life	ISO4406 class 16/14/11 NAS1638 class 5	
<b>Hydraulic fluid</b>	<b>Suitable seals type</b>	<b>Classification</b>	<b>Ref. Standard</b>
Mineral oils	NBR, FKM, HNBR	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR, HNBR	HFC	

**8 DIAGRAMS** - based on mineral oil ISO VG 46 at 50 °C

**8.1 Regulation diagrams** - values measure at Δp 30 bar P-T

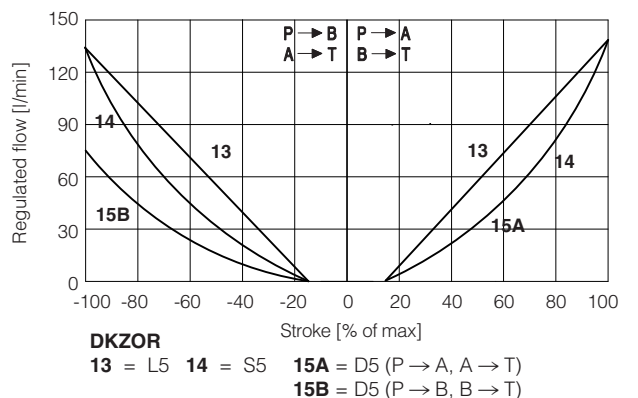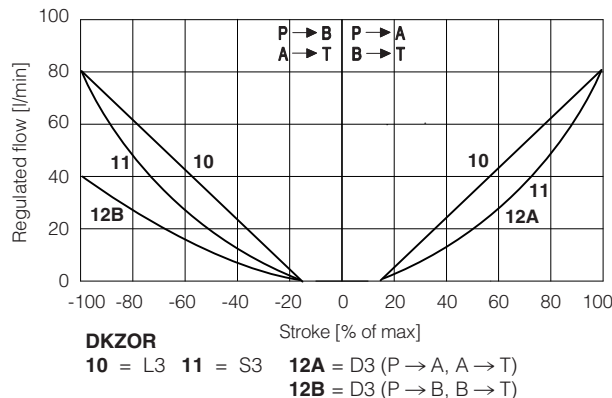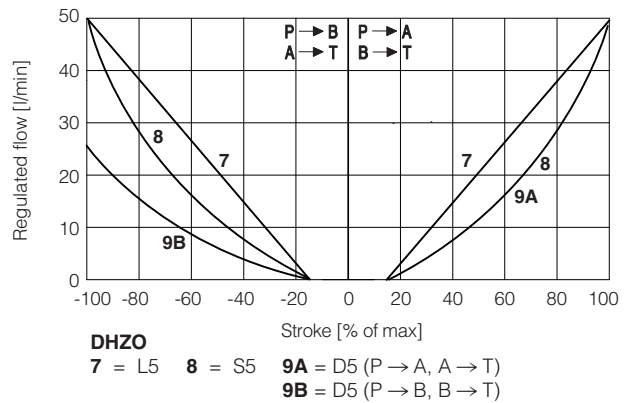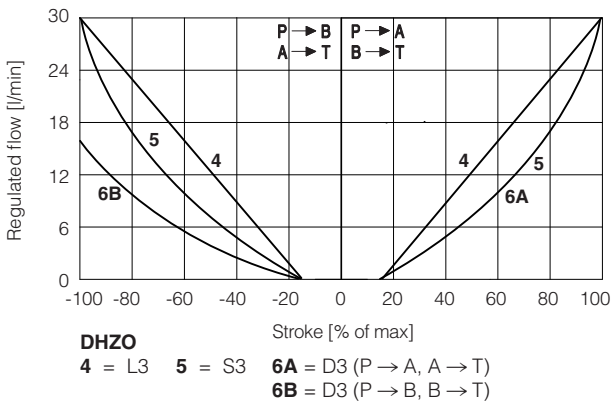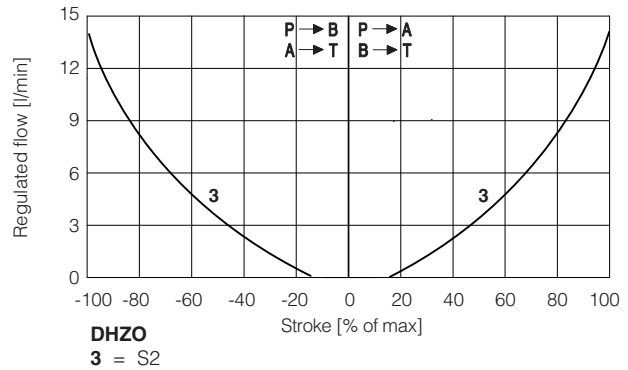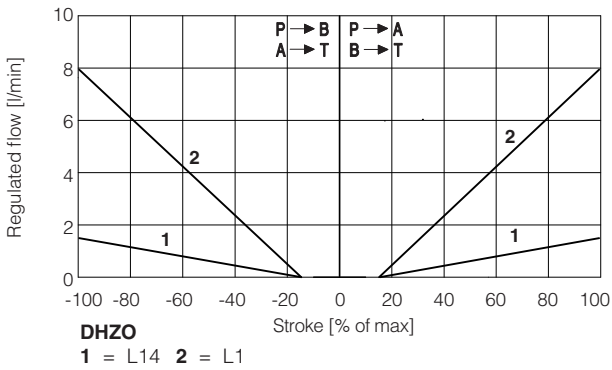

**Note:**


Hydraulic configuration vs. reference signal for configurations 71, 72 and 73 (standard and option /B)

Reference signal  $\left. \begin{matrix} 0 \div +10 \text{ V} \\ 12 \div 20 \text{ mA} \end{matrix} \right\} P \rightarrow A / B \rightarrow T$

Reference signal  $\left. \begin{matrix} 0 \div -10 \text{ V} \\ 12 \div 4 \text{ mA} \end{matrix} \right\} P \rightarrow B / A \rightarrow T$


**16 = linear spool Q5**

Q5 spool type is specific for alternate P/Q controls in combination with S\* option of digital integral drivers (see tech table **FS500**). It allows to control the pressure in A port or B port and it provides a safety central position (A-T/B-T) to depressurize the actuator chambers.  
The strong meter-in characteristic makes the spool suitable for both pressure control and motion regulations in several applications.

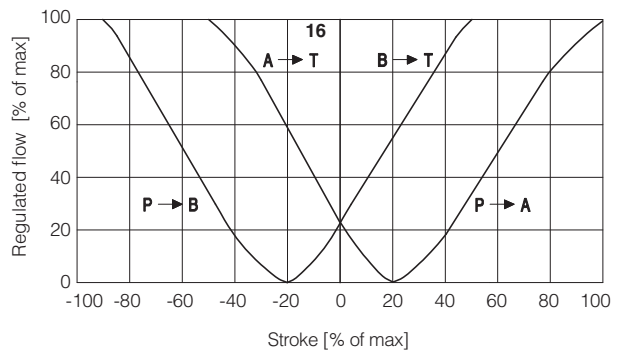

**17 = differential - progressive spool V9**

V9 spool type is specific for alternate P/Q controls in combination with S\* option of digital integral drivers (see tech table **FS500**). This spool is specially designed to manage the whole injection cycle in plastic machinery, thanks to the following specific features:  
- strong meter-in characteristic to allow the pressure control in A port during the holding pressure (P-A) and the plasticizing (A-T) phases  
- safety central position (A-T/B-T) to depressurize the actuator chambers  
- large A-T and B-T flow capability, required during the plasticizing phase, to discharge big volumes from high differential injection cylinders with low pressure drops and permitting the contemporary oil suction from tank

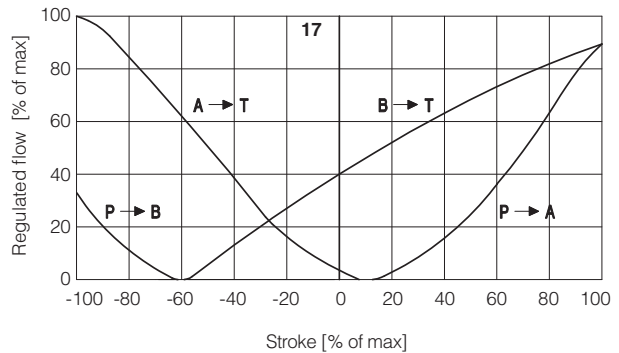

**8.2 Flow /Δp diagrams**



stated at 100% of valve stroke

**DHZO**

- 1 = spool L14
- 2 = spool L1
- 3 = spool S2
- 4 = spool L3, S3, D3
- 5 = spool L5, S5, D5, V9

**DKZOR**

- 6 = spool S3, L3, D3
- 7 = spool S5, L5, D5, V9

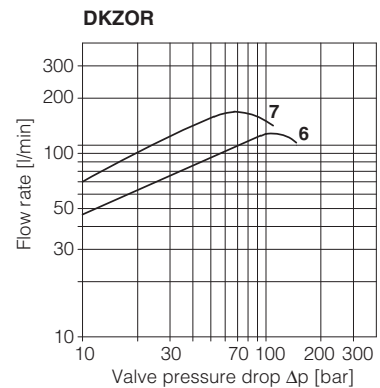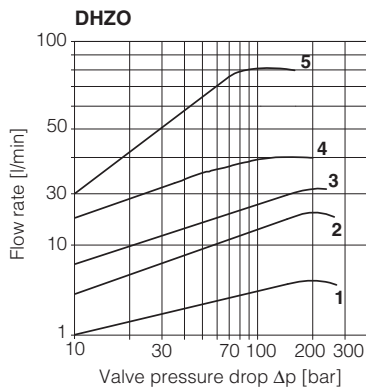



**8.3 Operating limits**

**DHZO**

- 1 = spool L14
- 2 = spool L1
- 3 = spool S2
- 4 = spool L3, S3, D3
- 5 = spool L5, S5, D5, V9



**DKZOR**

- 6 = spool S3, L3, D3
- 7 = spool S5, L5, D5, V9

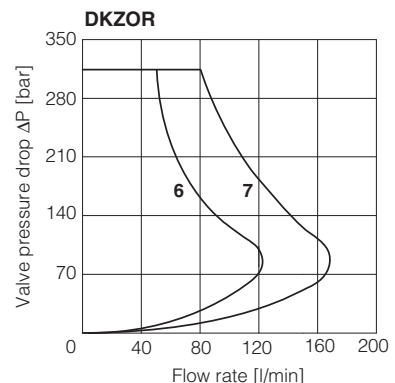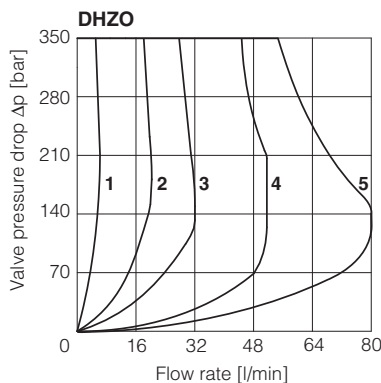



### 8.4 Response time

The response times in below diagrams are measured at different steps of the reference input signal. They have to be considered as average values. For the valves with digital electronics the dynamics performances can be optimized by setting the internal software parameters.

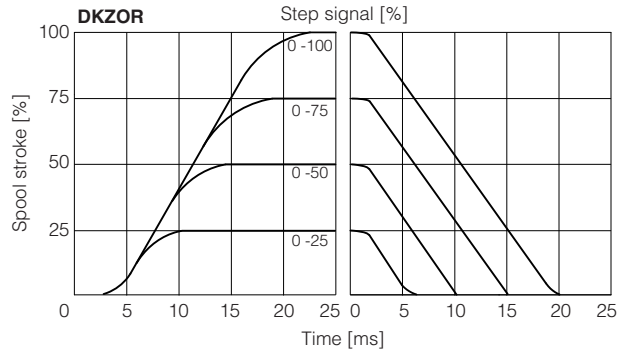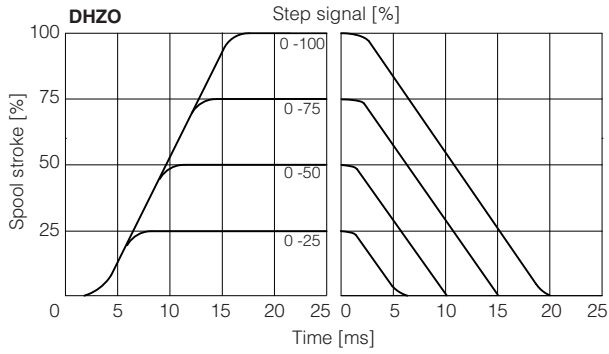


### 8.5 Bode diagrams

- 1 = 10% ↔ 90% nominal stroke
- 2 = 50% ± 5% nominal stroke

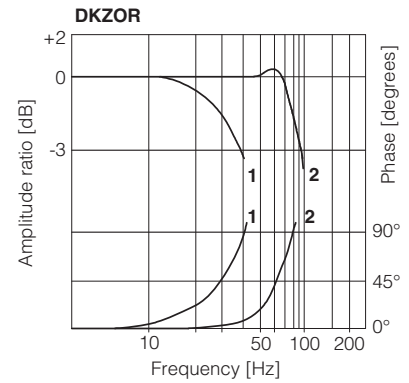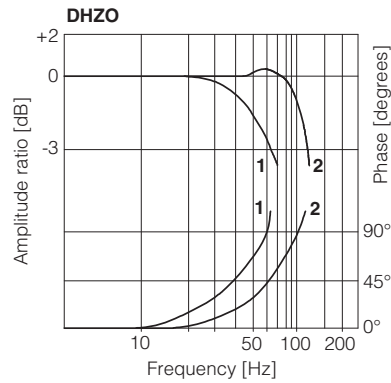

### 8.6 Operation as throttle valve

Single solenoid valves configuration 51 and 53 can be used as simple throttle valves:  
Pmax = 250 bar (option /Y advisable)



Max flow Δp= 15bar [l/min]	SPOOL TYPE				
	L14	L1	S2	L3 S3	L5 S5
<b>DHZO</b>	4	16	28	60	100
<b>DKZOR</b>	-	-	-	160	260

## 9 HYDRAULIC OPTIONS

**B** = Solenoid and position transducer at side of port A of the main stage. For hydraulic configuration vs reference signal, see 8.1

**Y** = This option is mandatory if the pressure in port T exceeds 210 bar.

## 10 ELECTRICAL CONNECTION


### 10.1 Solenoid connector - supplied with the valve

PIN	SIGNAL	TECHNICAL SPECIFICATION	Connector code 666
1	<b>COIL</b>	Power supply	
2	<b>COIL</b>	Power supply	
3	<b>GND</b>	Ground	



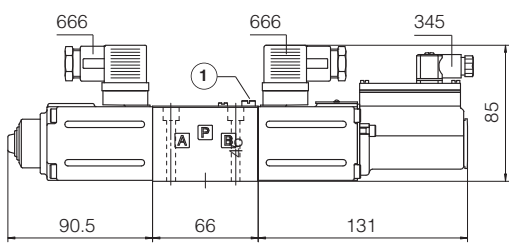

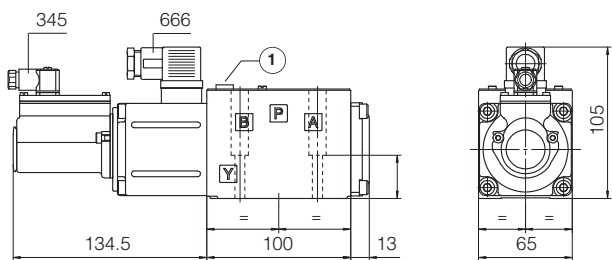





### 10.2 LVDT transducer connector - supplied with the valve

PIN	SIGNAL	TECHNICAL SPECIFICATION	Connector code 345
1	<b>TR</b>	Output signal	
2	<b>VT-</b>	Power supply -15Vdc	
3	<b>VT+</b>	Power supply +15Vdc	
4	<b>GND</b>	Ground	

## 11 FASTENING BOLTS AND SEALS

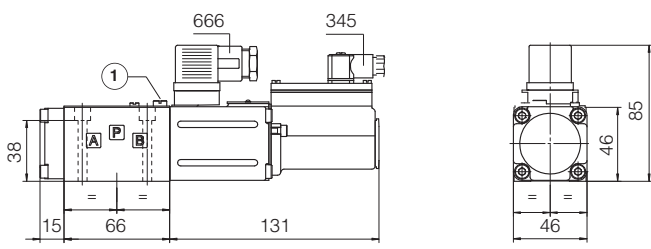	<b>DHZO</b>  <b>Fastening bolts:</b> 4 socket head screws M5x50 class 12.9 Tightening torque = 8 Nm	<b>DKZOR</b>  <b>Fastening bolts:</b> 4 socket head screws M6x40 class 12.9 Tightening torque = 15 Nm
	<b>Seals:</b> 4 OR 108; Diameter of ports A, B, P, T: $\varnothing$ 7,5 mm (max) 1 OR 2025 Diameter of port Y: $\varnothing$ = 3,2 mm (only for /Y option)	<b>Seals:</b> 5 OR 2050; Diameter of ports A, B, P, T: $\varnothing$ 11,2 mm (max) 1 OR 108 Diameter of port Y: $\varnothing$ = 5 mm (only for /Y option)
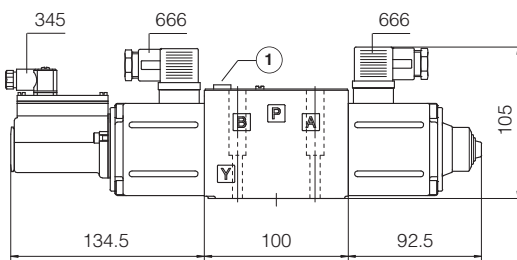
## 12 INSTALLATION DIMENSIONS [mm]

<h3>DHZO-T</h3> <p>ISO 4401: 2005  <b>Mounting surface: 4401-03-02-0-05</b> (see table P005)                  (for /Y surface 4401-03-03-0-05 without X port)</p>		<table border="1"> <thead> <tr> <th colspan="2">Mass [kg]</th> </tr> </thead> <tbody> <tr> <td>DHZO-T-05</td> <td>1,9</td> </tr> <tr> <td>DHZO-T-07</td> <td>2,6</td> </tr> </tbody> </table>	Mass [kg]		DHZO-T-05	1,9	DHZO-T-07	2,6
Mass [kg]								
DHZO-T-05	1,9							
DHZO-T-07	2,6							
<p><b>DHZO-T-05</b></p>  <p>① = Air bleeding </p>	<p><b>DHZO-T-07</b></p>  <p>① = Air bleeding </p>							
<h3>DKZOR-T</h3> <p>ISO 4401: 2005  <b>Mounting surface: 4401-05-04-0-05</b> (see table P005)                  (for /Y surface 4401-05-05-0-05 without X port)</p>		<table border="1"> <thead> <tr> <th colspan="2">Mass [kg]</th> </tr> </thead> <tbody> <tr> <td>DKZOR-T-15</td> <td>3,8</td> </tr> <tr> <td>DKZOR-T-17</td> <td>4,5</td> </tr> </tbody> </table>	Mass [kg]		DKZOR-T-15	3,8	DKZOR-T-17	4,5
Mass [kg]								
DKZOR-T-15	3,8							
DKZOR-T-17	4,5							
<p><b>DKZOR-T-15</b></p>  <p>① = Air bleeding  </p>	<p><b>DKZOR-T-17</b></p>  <p>① = Air bleeding  </p>							

**Note:** for option /B the solenoid and the LVDT transducer are at side of port A

## 13 RELATED DOCUMENTATION

<b>FS001</b>	Basics for digital electrohydraulics	<b>GS500</b>	Programming tools
<b>FS900</b>	Operating and maintenance information for proportional valves	<b>GS510</b>	Fieldbus
<b>GS230</b>	E-BM-TEB digital driver	<b>K800</b>	Electric and electronic connectors
<b>GS240</b>	E-BM-TEB digital driver	<b>P005</b>	Mounting surfaces for electrohydraulic valves