


Digital proportional relief valves

piloted, without transducer

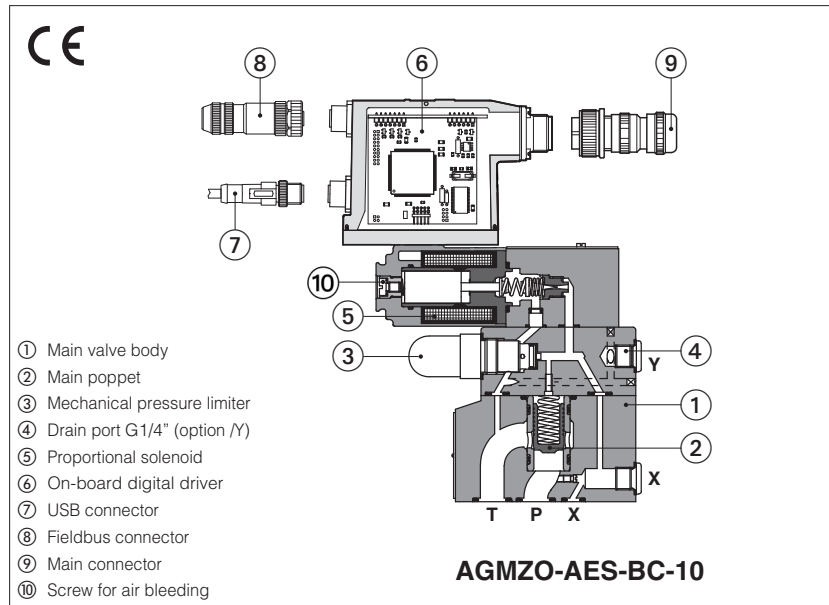

AGMZO-A, AGMZO-AEB, AGMZO-AES

Poppet type, piloted, digital proportional relief valves for pressure open loop controls.

A to be coupled with off-board driver.

AEB basic execution, with on-board digital driver, analog reference signals and USB port for software functional parameters setting.

AES full execution, with on-board digital driver which includes also fieldbus interface for functional parameters setting, reference signals and real-time diagnostics.

Size: **10, 20, 32** - ISO 6264


Max flow: **200, 400, 600 l/min**

Max pressure: **350 bar**

1 MODEL CODE

| | | | | | | | | | | | | | | | | |
|--|---|--|---|-----------|---|-----------|---|------------|---|---|---|---|---|---|---|---|
| AGMZO | - | AES | - | BC | - | 10 | / | 315 | / | * | / | * | / | * | / | * |
| Proportional pressure relief valve, piloted | | | | | | | | | | | | | | | | |
| A = for off-board driver, see section 3 AEB = basic on-board digital driver (1) AES = full on-board digital driver (2) | | | | | | | | | | | | | | | | |
| Fieldbus interfaces , USB port always present (3): NP = Not present BC = CANopen BP = PROFIBUS DP EH = EtherCAT | | | | | | | | | | | | | | | | |
| Valve size ISO 6264: 10, 20, 32 | | | | | | | | | | | | | | | | |
| Max regulated pressure: 50 = 50 bar 100 = 100 bar 210 = 210 bar 315 = 315 bar 350 = 350 bar | | | | | | | | | | | | | | | | |
| (1) Only for NP | | (3) Omit for A execution | | | | | | | | | | | | | | |
| (2) Only for BC, BP, EH | | (4) For possible combined options, see section 14 | | | | | | | | | | | | | | |
| | | Seals material , see section 10: - = NBR PE = FKM BT = HNBR | | | | | | | | | | | | | | |
| | | Coil voltage , only for A - see section 14: - = standard coil for 24 Vdc Atos drivers 6 = optional coil for 12 Vdc Atos drivers 18 = optional coil for low current drivers | | | | | | | | | | | | | | |
| | | Hydraulic options (4): E = external pilot Y = external drain (only pipe connection G 1/4") | | | | | | | | | | | | | | |
| | | Electronics options , only for AEB and AES (4): I = current reference input 4 ÷ 20 mA (omit for std voltage 0 ÷ 10 Vdc) Q = enable signal Z = double power supply, enable, fault and monitor signals - 12 pin connector | | | | | | | | | | | | | | |

2 HYDRAULIC SYMBOLS

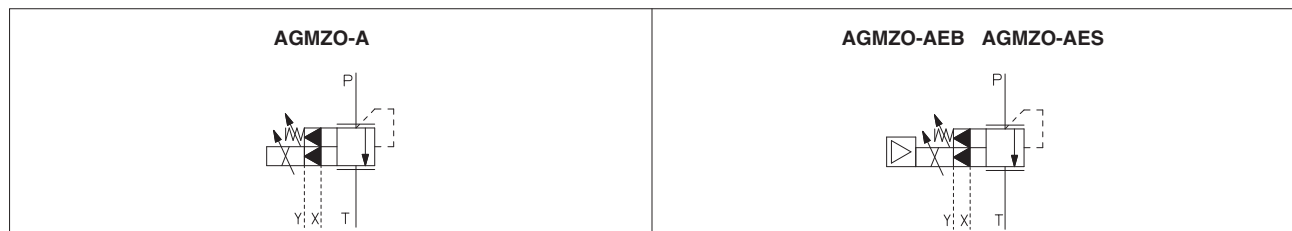

3 OFF-BOARD ELECTRONIC DRIVERS - only for A

| | | | | | | | |
|----------------------|---------------------|-----|------------|-----|----------------|-----|----------|
| Drivers model | E-MI-AC-01F | | E-MI-AS-IR | | E-BM-AS-PS | | E-BM-AES |
| Type | Analog | | Digital | | | | |
| Voltage supply (VDC) | 12 | 24 | 12 | 24 | 12 | 24 | 24 |
| Valve coil option | /6 | std | /6 | std | /6 | std | std |
| Format | plug-in to solenoid | | | | DIN-rail panel | | |
| Tech table | G010 | | G020 | | G030 | | GS050 |

4 GENERAL NOTES

Atos digital proportionals valves are CE marked according to the applicable directives (e.g. Immunity and Emission EMC Directive). Installation, wirings and start-up procedures must be performed according to the general prescriptions shown in tech table **FS900** and in the user manuals included in the E-SW-* programming software.

5 VALVE SETTINGS AND PROGRAMMING TOOLS

Valve's functional parameters and configurations, can be easily set and optimized using Atos E-SW programming software connected via USB port to the digital driver. For fieldbus versions, the software permits valve's parameterization through USB port also if the driver is connected to the central machine unit via fieldbus.

The software is available in different versions according to the driver's options (see table **GS500**):

E-SW-BASIC support: NP (USB) PS (Serial) IR (Infrared)
E-SW-FIELDBUS support: BC (CANopen) BP (PROFIBUS DP) EH (EtherCAT)
EW (POWERLINK) EI (EtherNet/IP) EP (PROFINET)
E-SW-*/PQ support: valves with SP, SF, SL alternated control (e.g. E-SW-BASIC/PQ)




WARNING: drivers USB port is not isolated! For E-C-SB-USB/M12 cable, the use of isolator adapter is highly recommended for PC protection



WARNING: see tech table **GS500** for the list of countries where the Bluetooth adapter has been approved

USB or Bluetooth connection

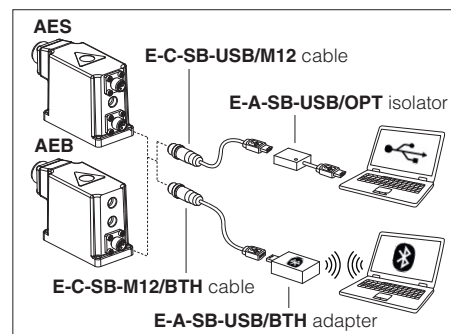

6 FIELDBUS - only for AES, see tech. table **GS510**

Fieldbus allows valve direct communication with machine control unit for digital reference, valve diagnostics and settings. These execution allow to operate the valves through fieldbus or analog signals available on the main connector.

7 GENERAL CHARACTERISTICS

| | |
|--|---|
| Assembly position | Any position |
| Subplate surface finishing to ISO 4401 | Acceptable roughness index: Ra ≤ 0,8, recommended Ra 0,4 – Flatness ratio 0,01/100 |
| MTTFd valves according to EN ISO 13849 | 75 years, see technical table P007 |
| Ambient temperature range | A: Standard = -20°C ÷ +70°C /PE option = -20°C ÷ +70°C /BT option = -40°C ÷ +60°C AEB, AES: Standard = -20°C ÷ +60°C /PE option = -20°C ÷ +60°C /BT option = -40°C ÷ +60°C |
| Storage temperature range | A: Standard = -20°C ÷ +80°C /PE option = -20°C ÷ +80°C /BT option = -40°C ÷ +70°C AEB, AES: Standard = -20°C ÷ +70°C /PE option = -20°C ÷ +70°C /BT option = -40°C ÷ +70°C |
| Surface protection | Zinc coating with black passivation, galvanic treatment (driver housing for AEB and AES) |
| Corrosion resistance | Salt spray test (EN ISO 9227) > 200 h |
| Compliance | CE according to EMC directive 2014/30/EU (Immunity: EN 61000-6-2; Emission: EN 61000-6-3) RoHS Directive 2011/65/EU as last update by 2015/863/EU REACH Regulation (EC) n°1907/2006 |

8 HYDRAULIC CHARACTERISTICS - based on mineral oil ISO VG 46 at 50 °C

| Valve model | AGMZO-*-10 | AGMZO-*-20 | AGMZO-*-32 |
|---|---|------------|------------|
| Max regulated pressure [bar] | 50; 100; 210; 315; 350 | | |
| Max pressure at port P [bar] | 350 | | |
| Max pressure at port T [bar] | 210 | | |
| Min regulated pressure [bar] | see min. pressure / flow diagrams at section 11 | | |
| Max flow [l/min] | 200 | 400 | 600 |
| Response time 0-100% step signal (depending on installation) (1) [ms] | ≤ 120 | ≤ 135 | ≤ 150 |
| Hysteresis | ≤ 0,5 [% of max pressure] | | |
| Linearity | ≤ 1,0 [% of max pressure] | | |
| Repeatability | ≤ 0,2 [% of max pressure] | | |

Note: above performance data refer to valves coupled with Atos electronic drivers, see section 3

(1) Average response time value; the pressure variation in consequence of a modification of the reference input signal to the valve is affected by the stiffness of the hydraulic circuit: greater is the stiffness of the circuit, faster is the dynamic response.

9 ELECTRICAL CHARACTERISTICS

| | | | | |
|----------------------------------|--|-----------------------------------|---|---|
| Power supplies | Nominal : +24 VDC Rectified and filtered : $V_{RMS} = 20 \div 32 V_{MAX}$ (ripple max 10 % VPP) | | | |
| Max power consumption | A = 30 W AEB, AES = 50 W | | | |
| Coil voltage code | standard | option /6 | option /18 | |
| Max. solenoid current | 2,6 A | 3,25 A | 1,5 A | |
| Coil resistance R at 20°C | 3 \div 3,3 Ω | 2 \div 2,2 Ω | 13 \div 13,4 Ω | |
| Analog input signals | Voltage: range ± 10 VDC (24 VMAX tollerant) Current: range ± 20 mA | | Input impedance: Ri > 50 k Ω Input impedance: Ri = 500 Ω | |
| Monitor output | Output range: voltage ± 5 VDC @ max 5 mA | | | |
| Enable input | Range: 0 \div 9 VDC (OFF state), 15 \div 24 VDC (ON state), 9 \div 15 VDC (not accepted); Input impedance: Ri > 87 k Ω | | | |
| Fault output | Output range : 0 \div 24 VDC (ON state \equiv VL+ [logic power supply] ; OFF state \equiv 0 V) @ max 50 mA; external negative voltage not allowed (e.g. due to inductive loads) | | | |
| Alarms | Solenoid not connected/short circuit, cable break with current reference signal, over/under temperature, current control monitoring, power supplies level, pressure transducer failure (/W option) | | | |
| Insulation class | H (180°) Due to the occurring surface temperatures of the solenoid coils, the European standards ISO 13732-1 and EN982 must be taken into account | | | |
| Protection degree to DIN EN60529 | A = IP65; AEB, AES = IP66 / IP67 with mating connectors | | | |
| Duty factor | Continuous rating (ED=100%) | | | |
| Tropicalization | Tropical coating on electronics PCB | | | |
| Additional characteristics | Short circuit protection of solenoid's current supply; current control by P.I.D. with rapid solenoid switching; protection against reverse polarity of power supply | | | |
| Communication interface | USB Atos ASCII coding | CANopen EN50325-4 + DS408 | PROFIBUS DP EN50170-2/IEC61158 | EtherCAT EC 61158 |
| Communication physical layer | not insulated USB 2.0 + USB OTG | optical insulated CAN ISO11898 | optical insulated RS485 | Fast Ethernet, insulated 100 Base TX |
| Recommended wiring cable | LiYCY shielded cables, see section 20 | | | |


Note: a maximum time of 500 ms (depending on communication type) have be considered between the driver energizing with the 24 Vdc power supply and when the valve is ready to operate. During this time the current to the valve coils is switched to zero.

10 SEALS AND HYDRAULIC FLUIDS - for other fluids not included in below table, consult our technical office


| | | | |
|--------------------------------------|--|---|---|
| Seals, recommended fluid temperature | NBR seals (standard) = -20°C \div +60°C (+80°C for A), with HFC hydraulic fluids = -20°C \div +50°C FKM seals (/PE option) = -20°C \div +80°C HNBR seals (/BT option) = -40°C \div +60°C, with HFC hydraulic fluids = -40°C \div +50°C | | |
| Recommended viscosity | 20 \div 100 mm ² /s - max allowed range 15 \div 380 mm ² /s | | |
| Max fluid contamination level | normal operation | ISO4406 class 18/16/13 NAS1638 class 7 | see also filter section at www.atos.com or KTF catalog |
| | longer life | ISO4406 class 16/14/11 NAS1638 class 5 | |
| Hydraulic fluid | Suitable seals type | Classification | Ref. Standard |
| Mineral oils | NBR, FKM, HNBR | HL, HLP, HLPD, HVLP, HVLPD | DIN 51524 |
| Flame resistant without water | FKM | HFDU, HFDR | ISO 12922 |
| Flame resistant with water | NBR, HNBR | HFC | |

11 DIAGRAMS (based on mineral oil ISO VG 46 at 50 °C)

1 = Regulation diagrams
with flow rate Q = 50 l/min


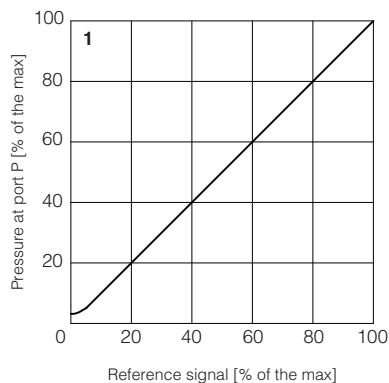


2 = Pressure/flow diagrams
with reference signal set at Q = 50 l/min

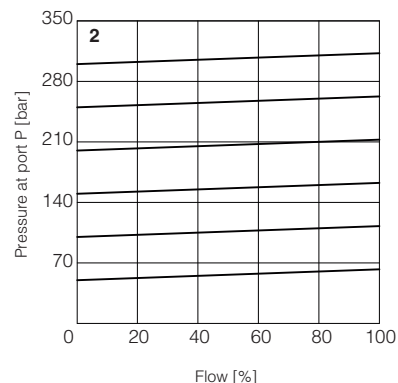


3-8 = Min. pressure/flow diagrams
with zero reference signal

- 3 = AGMZO-*-10/50, 100, 210, 315
- 4 = AGMZO-*-10/350
- 5 = AGMZO-*-20/50, 100, 210, 315
- 6 = AGMZO-*-20/350
- 7 = AGMZO-*-32/50, 100, 210, 315
- 8 = AGMZO-*-32/350

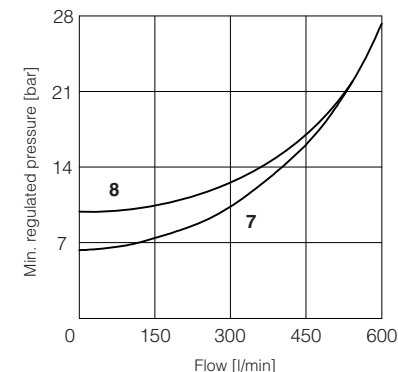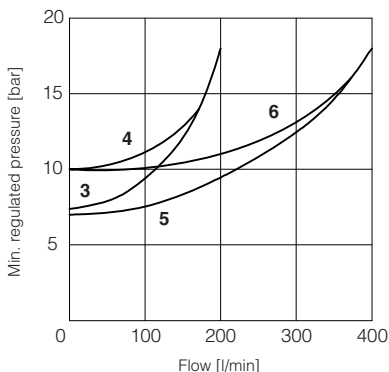


12 HYDRAULIC OPTIONS

- E** = External pilot option to be selected when the pilot pressure is supplied from a different line respect to the P main line. With option E the internal connection between port P and X of the valve is plugged. The pilot pressure must be connected to the X port available on the valve's mounting surface or on main body (threaded pipe connection G 1/4").
- Y** = The external drain is mandatory in case the main line T is subjected to pressure peaks or it is pressurized. The Y drain port has a threaded connection G 1/4" available on the pilot stage body.

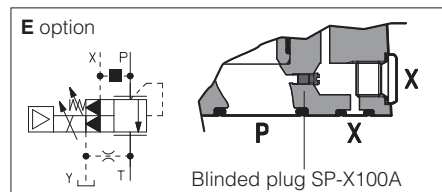

13 ELECTRONICS OPTIONS - only for AEB and AES

- I** = This option provides 4 ÷ 20 mA current reference and monitor signals, instead of the standard 0 ÷ 10 VDC. Input signal can be reconfigured via software selecting between voltage and current, within a maximum range of ±10 VDC or ±20 mA. It is normally used in case of long distance between the machine control unit and the valve or where the reference signal can be affected by electrical noise; the valve functioning is disabled in case of reference signal cable breakage.
- Q** = This option permits to inhibit the valve function without removing the power supply to the driver. Upon disable command the current to the solenoid is zeroed and the valve's spool moves to rest position. The option /Q is suggested for all cases where the valve has to be frequently inhibited during the machine cycle – see 18.5 for signal specifications.
- Z** = This option provides, on the 12 pin main connector, the following additional features:
Fault output signal - see 18.6
Enable input signal - see above option /Q
Power supply for driver's logics and communication - see 18.2

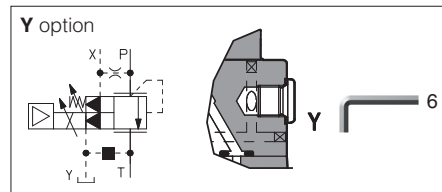


14 POSSIBLE COMBINED OPTIONS

- Hydraulic options:** all combination possible
- Electronics options:** /IQ, /IZ

15 MECHANICAL PRESSURE LIMITER


The AGMZO are provided with mechanical pressure limiter acting as protection against overpressure. For safety reasons the factory setting of the mechanical pressure limiter is fully unloaded (min pressure). At the first commissioning it must be set at a value lightly higher than the max pressure regulated with the proportional control. For the pressure setting of the mechanical pressure limiter, proceed according to following steps:

- apply the max reference input signal to the valve's driver. The system pressure will not increase until the mechanical pressure limiter remains unloaded.
- turn clockwise the adjustment screw ① until the system pressure will increase up to a stable value corresponding to the pressure setpoint at max reference input signal.
- turn clockwise the adjustment screw ① of additional 1 or 2 turns to ensure that the mechanical pressure limiter remains closed during the proportional valve working.

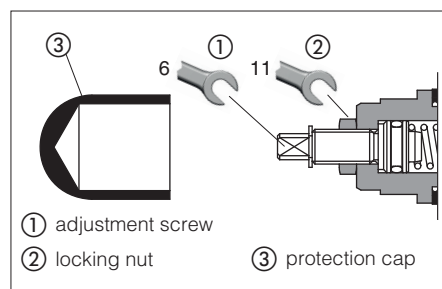


16 REMOTE PRESSURE UNLOADING

The **P** main line can be remotely unloaded by connecting the valve X port to a solenoid valve as shown in the below scheme (venting valve). This function can be used in emergency to unload the system pressure by-passing the proportional control.



17 AIR BLEEDING

At the first valve commissioning the air eventually trapped inside the solenoid must be bled-off through the screw ① located at the rear side of the solenoid housing. The presence of air may cause pressure instability and vibrations.



18 POWER SUPPLY AND SIGNALS SPECIFICATIONS - only for AEB and AES

Generic electrical output signals of the valve (e.g. fault or monitor signals) must not be directly used to activate safety functions, like to switch-ON/OFF the machine's safety components, as prescribed by the European standards (Safety requirements of fluid technology systems and components-hydraulics, ISO 4413).

18.1 Power supply (V+ and V0)

The power supply must be appropriately stabilized or rectified and filtered: apply at least a 10000 $\mu\text{F}/40\text{ V}$ capacitance to single phase rectifiers or a 4700 $\mu\text{F}/40\text{ V}$ capacitance to three phase rectifiers. In case of separate power supply see 18.2.



A safety fuse is required in series to each power supply: 2,5 A time lag fuse.

18.2 Power supply for driver's logic and communication (VL+ and VL0) - only for /Z option

The power supply for driver's logic and communication must be appropriately stabilized or rectified and filtered: apply at least a 10000 $\mu\text{F}/40\text{ V}$ capacitance to single phase rectifiers or a 4700 $\mu\text{F}/40\text{ V}$ capacitance to three phase rectifiers.

The separate power supply for driver's logic on pin 9 and 10, allow to remove solenoid power supply from pin 1 and 2 maintaining active the diagnostics, USB and fieldbus communications.



A safety fuse is required in series to each driver's logic and communication power supply: 500 mA fast fuse.

18.3 Reference input signal (INPUT+)

The driver controls in closed loop the current to the valve proportionally to the external reference input signal.

Reference input signal is factory preset according to selected valve code, defaults are 0 ÷ 10 V_{dc} for standard and 4 ÷ 20 mA for /I option.

Input signal can be reconfigured via software selecting between voltage and current, within a maximum range of $\pm 10\text{ V}_{dc}$ or $\pm 20\text{ mA}$.

Drivers with fieldbus interface (BC, BP, EH) can be software set to receive reference signal directly from the machine control unit (fieldbus reference). Analog reference input signal can be used as on-off commands with input range 0 ÷ 24V_{dc}.

18.4 Monitor output signal (MONITOR)

The driver generates an analog output signal (MONITOR) proportional to the actual coil current of the valve; the monitor output signal can be software set to show other signals available in the driver (e.g. analog reference, fieldbus reference).

Monitor output signal is factory preset according to selected valve code, default settings is 0 ÷ 5 V_{dc} (1V = 1A).

Output signal can be reconfigured via software, within a maximum range of $\pm 5\text{ V}_{dc}$.

18.5 Enable input signal (ENABLE) - not for standard

To enable the driver, supply a 24 V_{dc} on pin 3 (pin C): Enable input signal allows to enable/disable the current supply to the solenoid, without removing the electrical power supply to the driver; it is used to active the communication and the other driver functions when the valve must be disabled for safety reasons. This condition **does not comply** with norms IEC 61508 and ISO 13849.

Enable input signal can be used as generic digital input by software selection.

18.6 Fault output signal (FAULT) - only for /Z option

Fault output signal indicates fault conditions of the driver (solenoid short circuits/not connected, reference signal broken for 4 ÷ 20 mA input, etc.).

Fault presence corresponds to 0 V_{dc}, normal working corresponds to 24 V_{dc}.

Fault status is not affected by the Enable input signal.

19 ELECTRONIC CONNECTIONS

19.1 Main connector signals - 7 pin (A1) Standard and /Q option - for AEB and AES

| PIN | Standard | /Q | TECHNICAL SPECIFICATIONS | NOTES |
|-----|-----------------------------------|--------|--|--|
| A | V+ | | Power supply 24 Vdc | Input - power supply |
| B | V0 | | Power supply 0 Vdc | Gnd - power supply |
| C | AGND | | Analog ground | Gnd - analog signal |
| | | ENABLE | Enable (24 Vdc) or disable (0 Vdc) the driver, referred to V0 | Input - on/off signal |
| D | INPUT+ | | Reference input signal: ± 10 Vdc / ± 20 mA maximum range Defaults are 0 ÷ 10 Vdc for standard and 4 ÷ 20 mA for /I option | Input - analog signal Software selectable |
| E | INPUT- | | Negative reference input signal for INPUT+ | Input - analog signal |
| F | MONITOR referred to: AGND V0 | | Monitor output signal: ± 5 Vdc maximum range Default is 0 ÷ 5 Vdc (1V = 1A) | Output - analog signal Software selectable |
| G | EARTH | | Internally connected to driver housing | |

19.2 Main connector signals - 12 pin (A2) /Z option - for AEB and AES

| PIN | /Z | TECHNICAL SPECIFICATIONS | NOTES |
|-----|---------|--|--|
| 1 | V+ | Power supply 24 Vdc | Input - power supply |
| 2 | V0 | Power supply 0 Vdc | Gnd - power supply |
| 3 | ENABLE | Enable (24 Vdc) or disable (0 Vdc) the driver, referred to VL0 | Input - on/off signal |
| 4 | INPUT+ | Reference input signal: ± 10 Vdc / ± 20 mA maximum range Defaults are 0 ÷ 10 Vdc for standard and 4 ÷ 20 mA for /I option | Input - analog signal Software selectable |
| 5 | INPUT- | Negative reference input signal for INPUT+ | Input - analog signal |
| 6 | MONITOR | Monitor output signal: ± 5 Vdc maximum range, referred to VL0 Default is 0 ÷ 5 Vdc (1V = 1A) | Output - analog signal Software selectable |
| 7 | NC | Do not connect | |
| 8 | NC | Do not connect | |
| 9 | VL+ | Power supply 24 Vdc for driver's logic and communication | Input - power supply |
| 10 | VL0 | Power supply 0 Vdc for driver's logic and communication | Gnd - power supply |
| 11 | FAULT | Fault (0 Vdc) or normal working (24 Vdc), referred to VL0 | Output - on/off signal |
| PE | EARTH | Internally connected to driver housing | |

Note: do not disconnect VL0 before VL+ when the driver is connected to PC USB port

19.3 Communication connectors - for AEB (B) and AES (B) - (C)

| (B) USB connector - M12 - 5 pin always present | | |
|--|---------|-----------------------------|
| PIN | SIGNAL | TECHNICAL SPECIFICATION (1) |
| 1 | +5V_USB | Power supply |
| 2 | ID | Identification |
| 3 | GND_USB | Signal zero data line |
| 4 | D- | Data line - |
| 5 | D+ | Data line + |

| (C1) BC fieldbus execution, connector - M12 - 5 pin (2) | | |
|---|----------|-----------------------------|
| PIN | SIGNAL | TECHNICAL SPECIFICATION (1) |
| 1 | CAN_SHLD | Shield |
| 2 | NC | do not connect |
| 3 | CAN_GND | Signal zero data line |
| 4 | CAN_H | Bus line (high) |
| 5 | CAN_L | Bus line (low) |


| (C2) BP fieldbus execution, connector - M12 - 5 pin (2) | | |
|---|--------|---------------------------------------|
| PIN | SIGNAL | TECHNICAL SPECIFICATION (1) |
| 1 | +5V | Termination supply signal |
| 2 | LINE-A | Bus line (high) |
| 3 | DGND | Data line and termination signal zero |
| 4 | LINE-B | Bus line (low) |
| 5 | SHIELD | |

| (C3) (C4) EH fieldbus execution, connector - M12 - 4 pin (2) | | |
|--|--------|-----------------------------|
| PIN | SIGNAL | TECHNICAL SPECIFICATION (1) |
| 1 | TX+ | Transmitter |
| 2 | RX+ | Receiver |
| 3 | TX- | Transmitter |
| 4 | RX- | Receiver |
| Housing | SHIELD | |


(1) Shield connection on connector's housing is recommended

(2) Only for AES execution

19.4 Solenoid connection - only for A


| PIN | SIGNAL | TECHNICAL SPECIFICATION | Connector code 666 |
|-----|--------|-------------------------|---|
| 1 | COIL | Power supply |  |
| 2 | COIL | Power supply | |
| 3 | GND | Ground | |

19.5 AEB connections layout

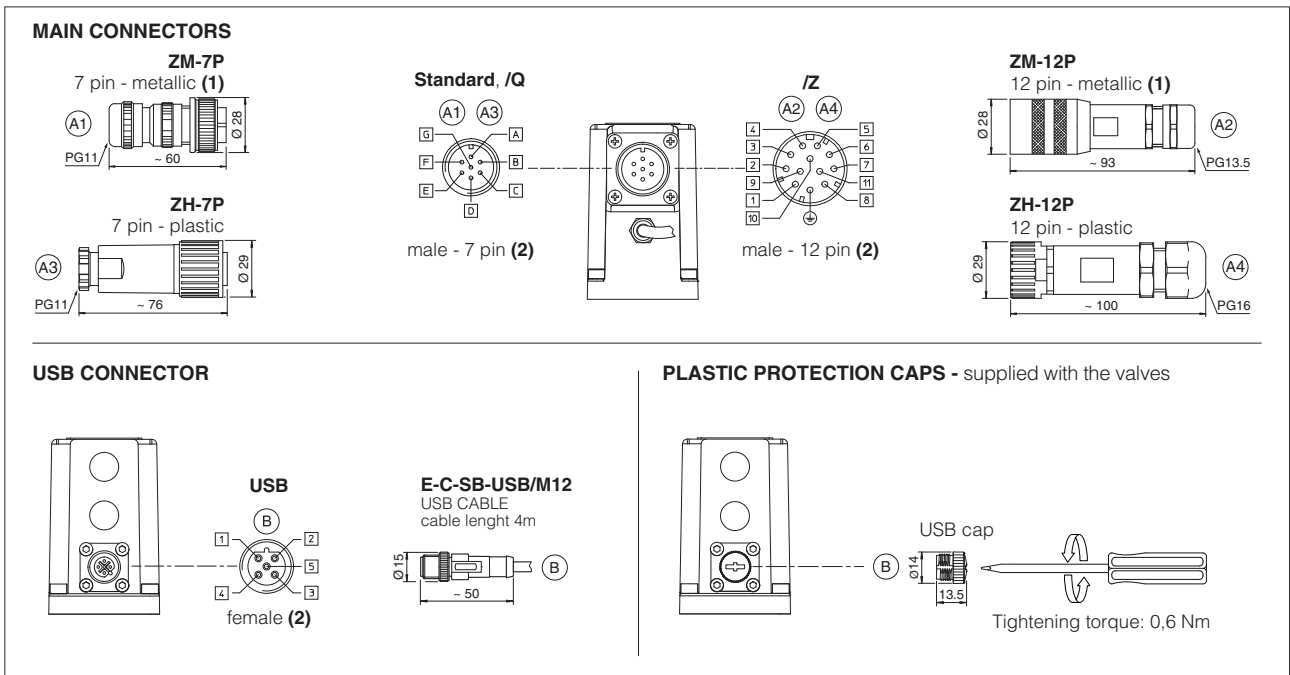

(1) Use of metallic connectors is strongly recommended in order to fulfill EMC requirements (2) Pin layout always referred to driver's view

19.6 AES connections layout

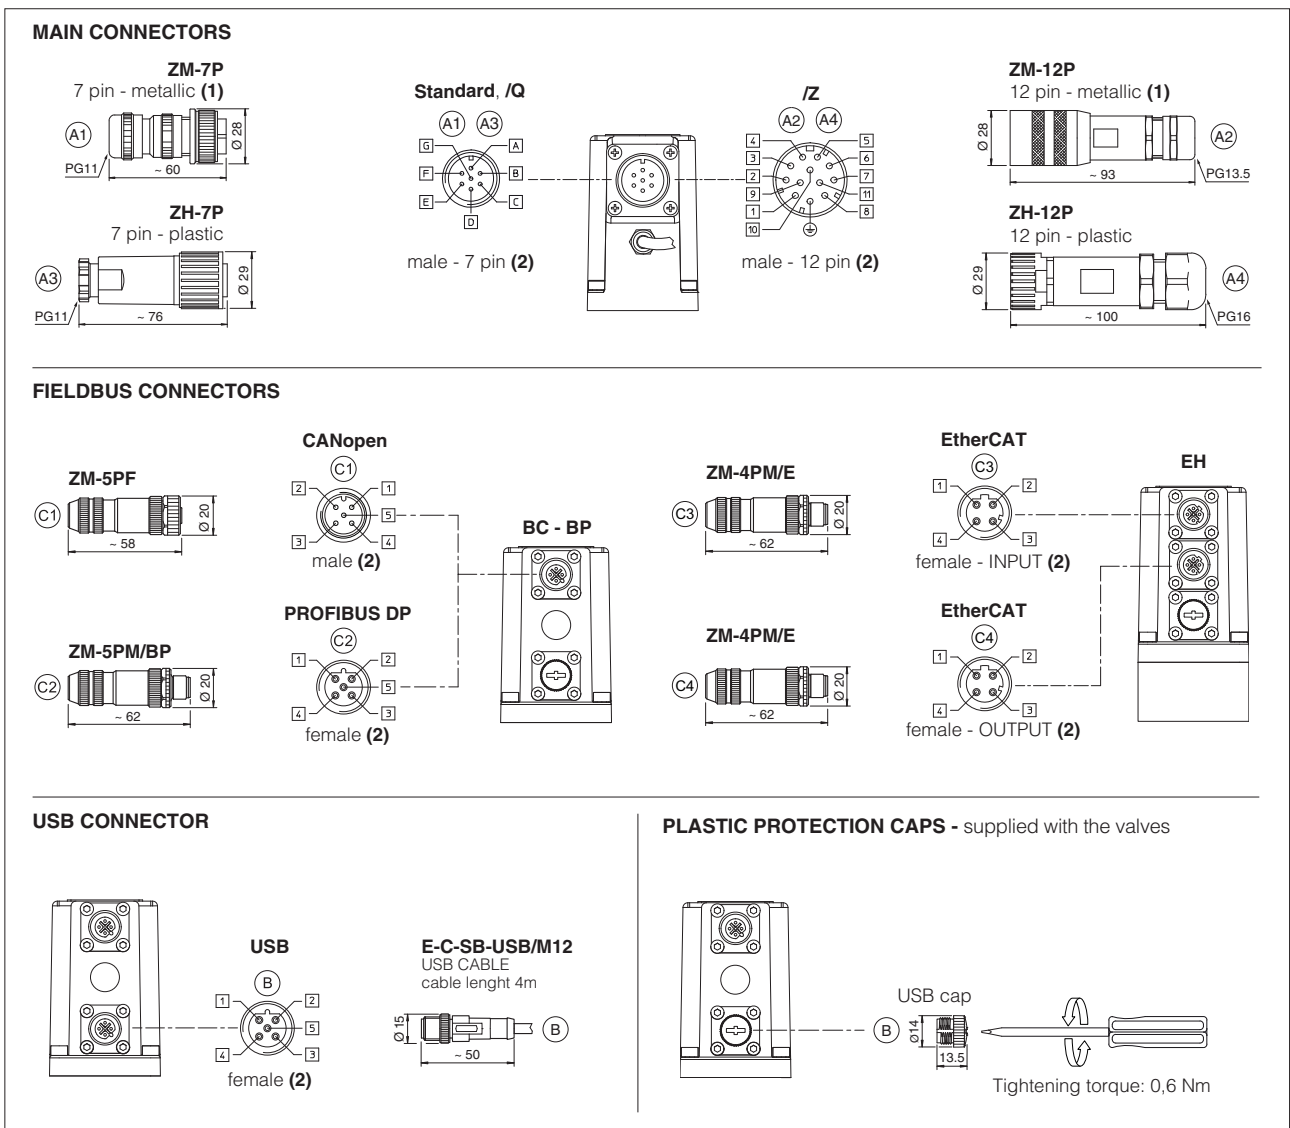

(1) Use of metallic connectors is strongly recommended in order to fulfill EMC requirements (2) Pin layout always referred to driver's view

20 CONNECTORS CHARACTERISTICS - to be ordered separately

20.1 Main connectors - 7 pin - for AEB and AES

| CONNECTOR TYPE | POWER SUPPLY | POWER SUPPLY |
|-----------------------|--|--|
| CODE | (A1) ZM-7P | (A3) ZH-7P |
| Type | 7pin female straight circular | 7pin female straight circular |
| Standard | According to MIL-C-5015 | According to MIL-C-5015 |
| Material | Metallic | Plastic reinforced with fiber glass |
| Cable gland | PG11 | PG11 |
| Recommended cable | LiYCY 7 x 0,75 mm ² max 20 m (logic and power supply) or LiYCY 7 x 1 mm ² max 40 m (logic and power supply) | LiYCY 7 x 0,75 mm ² max 20 m (logic and power supply) or LiYCY 7 x 1 mm ² max 40 m (logic and power supply) |
| Conductor size | up to 1 mm ² - available for 7 wires | up to 1 mm ² - available for 7 wires |
| Connection type | to solder | to solder |
| Protection (EN 60529) | IP 67 | IP 67 |

20.2 Main connectors - 12 pin - for AEB and AES

| CONNECTOR TYPE | POWER SUPPLY | POWER SUPPLY |
|-----------------------|---|---|
| CODE | (A2) ZM-12P | (A4) ZH-12P |
| Type | 12pin female straight circular | 12pin female straight circular |
| Standard | DIN 43651 | DIN 43651 |
| Material | Metallic | Plastic reinforced with fiber glass |
| Cable gland | PG13,5 | PG16 |
| Recommended cable | LiYCY 12 x 0,75 mm ² max 20 m (logic and power supply) | LiYCY 10 x 0,14mm ² max 40 m (logic) LiYY 3 x 1mm ² max 40 m (power supply) |
| Conductor size | 0,5 mm ² to 1,5 mm ² - available for 12 wires | 0,14 mm ² to 0,5 mm ² - available for 9 wires 0,5 mm ² to 1,5 mm ² - available for 3 wires |
| Connection type | to crimp | to crimp |
| Protection (EN 60529) | IP 67 | IP 67 |



20.3 Fieldbus communication connectors - only for AES

| CONNECTOR TYPE | BC CANopen (1) | | BP PROFIBUS DP (1) | | EH EtherCAT (2) | |
|-----------------------|--------------------------------------|------------------------------|--------------------------------------|------------------------------|--------------------------------------|--|
| CODE | (C1) ZM-5PF | (C2) ZM-5PM | (C1) ZM-5PF/BP | (C2) ZM-5PM/BP | (C1) (C2) ZM-4PM/E | |
| Type | 5 pin female straight circular | 5 pin male straight circular | 5 pin female straight circular | 5 pin male straight circular | 4 pin male straight circular | |
| Standard | M12 coding A – IEC 61076-2-101 | | M12 coding B – IEC 61076-2-101 | | M12 coding D – IEC 61076-2-101 | |
| Material | Metallic | | Metallic | | Metallic | |
| Cable gland | Pressure nut - cable diameter 6÷8 mm | | Pressure nut - cable diameter 6÷8 mm | | Pressure nut - cable diameter 4÷8 mm | |
| Cable | CANbus Standard (DR 303-1) | | PROFIBUS DP Standard | | Ethernet standard CAT-5 | |
| Connection type | screw terminal | | screw terminal | | terminal block | |
| Protection (EN 60529) | IP67 | | IP 67 | | IP 67 | |

(1) E-TRM-** terminators can be ordered separately - see tech table **GS500**

(2) Internally terminated

21 FASTENING BOLTS AND SEALS

| | AGMZO-*-10 | AGMZO-*-20 | AGMZO-*-32 |
|---|--|---|---|
|  | <p>Fastening bolts: 4 socket head screws M12x35 class 12.9 Tightening torque = 125 Nm</p> | <p>Fastening bolts: 4 socket head screws M16x50 class 12.9 Tightening torque = 300 Nm</p> | <p>Fastening bolts: 4 socket head screws M20x60 class 12.9 Tightening torque = 600 Nm</p> |
|  | <p>Seals: 2 OR 123 Diameter of ports P, T: Ø 14 mm 1 OR 109/70 Diameter of port X: Ø 3,2 mm</p> | <p>Seals: 2 OR 4112 Diameter of ports P, T: Ø 24 mm 1 OR 109/70 Diameter of port X: Ø 3,2 mm</p> | <p>Seals: 2 OR 4131 Diameter of ports P, T: Ø 28 mm 1 OR 109/70 Diameter of port X: Ø 3,2 mm</p> |

SIZE 10


ISO 6264: 2007

Mounting surface: 6264-06-09-1-97


(see table P005)

| | Mass [kg] | | |
|------------|-----------|----------|--------|
| | A | AEB, AES | AES-EH |
| AGMZO-*-10 | 5,4 | 5,9 | 6,0 |


AGMZO-A-10

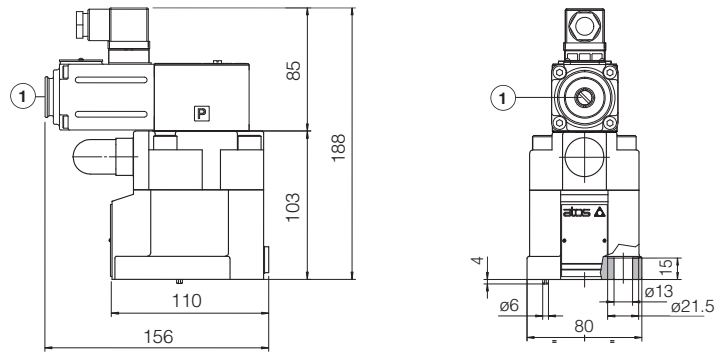


AGMZO-AEB-NP-10

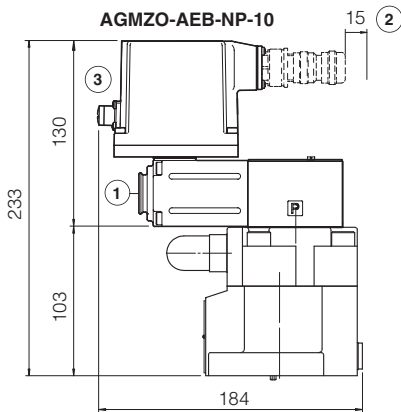

AGMZO-AES-BC-10
AGMZO-AES-BP-10

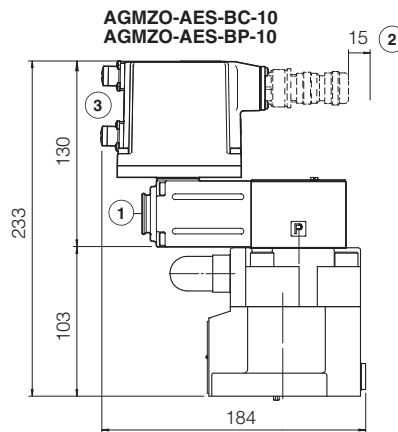

AGMZO-AES-EH-10

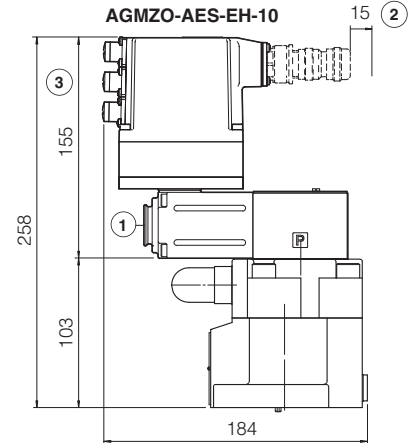

SIZE 20


ISO 6264: 2007

Mounting surface: 6264-08-13-1-97


(see table P005)

| | Mass [kg] | | |
|------------|-----------|----------|--------|
| | A | AEB, AES | AES-EH |
| AGMZO-*-20 | 6,6 | 7,1 | 7,2 |


AGMZO-A-20

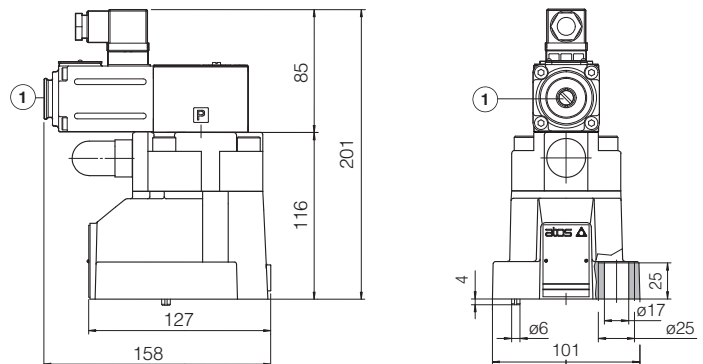


AGMZO-AEB-NP-20

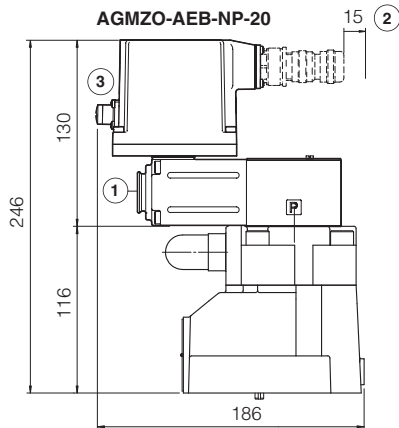


AGMZO-AES-BC-20
AGMZO-AES-BP-20

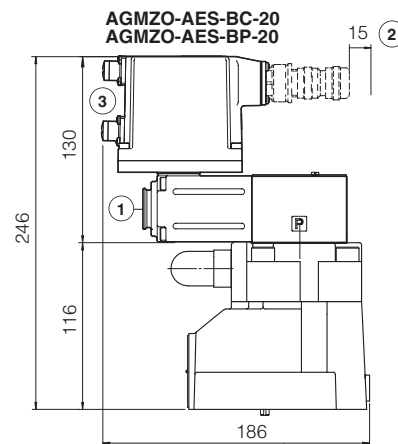

AGMZO-AES-EH-20

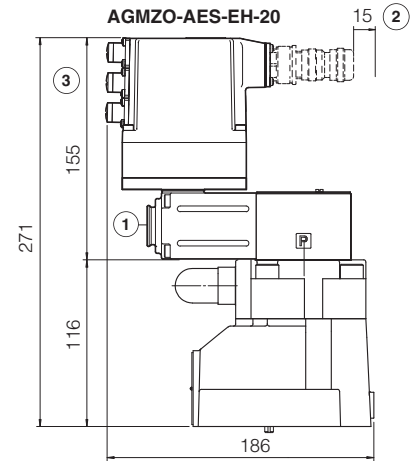

① = Air bleeding, see section 17 

② = Space to remove the connectors

③ = The dimensions of all connectors must be considered, see section 17.5 and 17.6

SIZE 32


ISO 6264: 2007

Mounting surface: 6264-10-17-1-97



(see table P005)

(with M20 fixing holes instead of standard M18)


| | Mass [kg] | | |
|------------|-----------|----------|--------|
| | A | AEB, AES | AES-EH |
| AGMZO-*-32 | 8,0 | 8,5 | 8,6 |

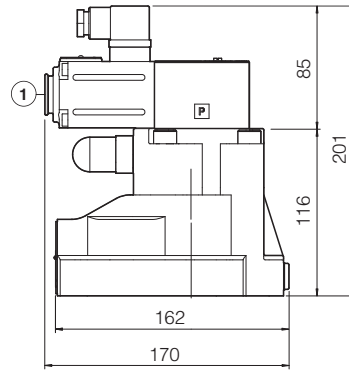


AGMZO-A-32

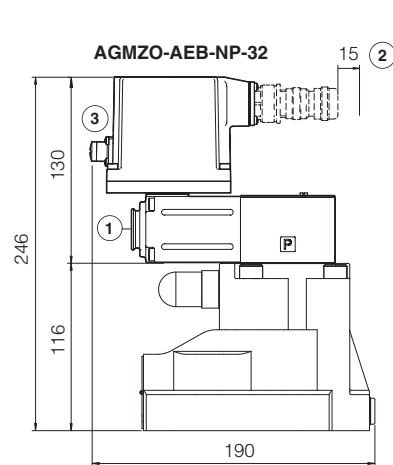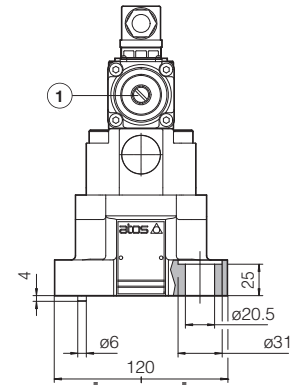


AGMZO-AEB-NP-32

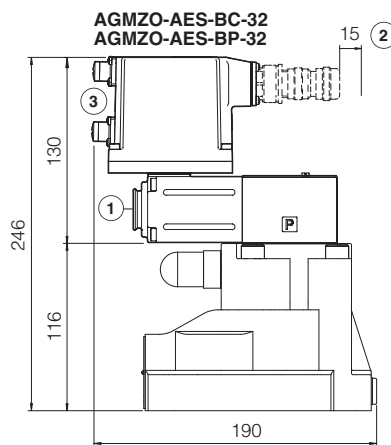

AGMZO-AES-BC-32
AGMZO-AES-BP-32

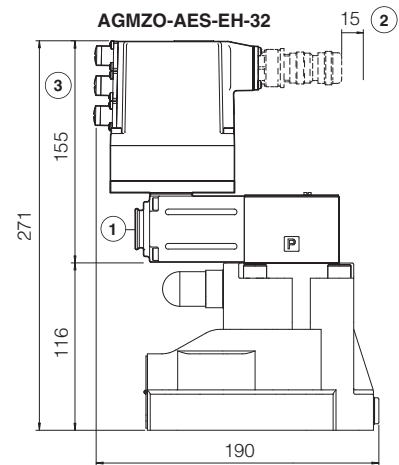

AGMZO-AES-EH-32

① = Air bleeding, see section 17 

② = Space to remove the connectors

③ = The dimensions of all connectors must be considered, see section 19.5 and 19.6

23 RELATED DOCUMENTATION

| | | | |
|--------------|---|--------------|---|
| FS001 | Basics for digital electrohydraulics | GS500 | Programming tools |
| FS900 | Operating and maintenance information for proportional valves | GS510 | Fieldbus |
| G010 | E-MI-AC analog driver | K800 | Electric and electronic connectors |
| G020 | E-MI-AS-IR digital driver | P005 | Mounting surfaces for electrohydraulic valves |
| G030 | E-BM-AS digital driver | QB200 | Quickstart for AEB valves commissioning |
| GS050 | E-BM-AES digital driver | QF200 | Quickstart for AES valves commissioning |