


ISO cartridge valves type LIDD

Flow control

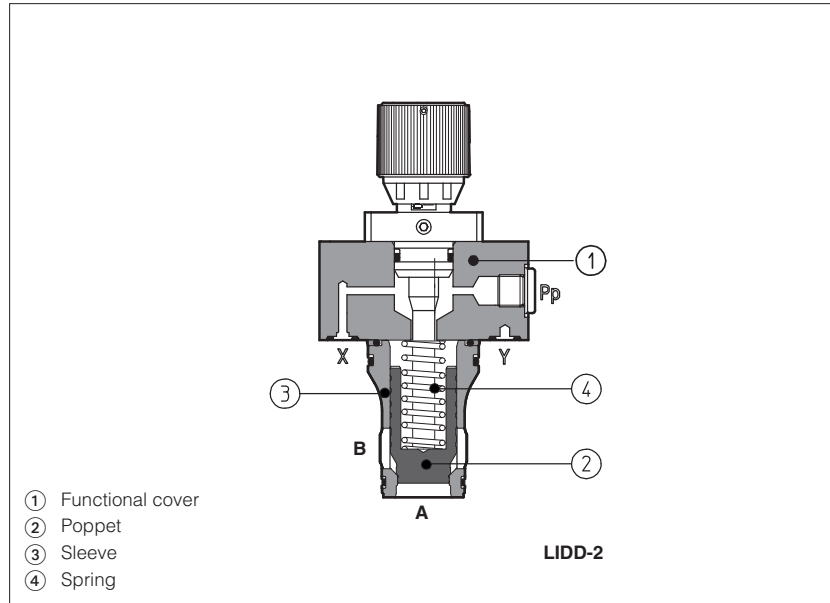

LIDD are flow control valves not compensated, in ISO cartridge design, made by a functional "cover" ① and a 2-way SC LI slip-in cartridge.

Covers are provided with regulating screw to adjust the cartridge opening.

The cartridge is made by poppet ② sliding into a sleeve ③. The position of the spool or poppet and then the controlled flow, is manually set on the regulating screw of the cover; the cracking pressure value depends on poppet spring.

Size: **16 to 63** ISO 7368

Max flow up to **4000 l/min** at Δp 5 bar


Max pressure: **LIDD 420 bar**

1 MODEL CODE FOR COVERS - for model code of slip-in cartridge/spool, see section 3

LI	DD	1	*	**	/*
Cover according to ISO 7368					Seals material: - = NBR PE = FKM BT = HNBR
Flow control valve: DD = normally closed with stroke limiter				Series number LIDD = 50 all sizes (1)	
Size for LIDD: 1 = 16 4 = 40 2 = 25 5 = 50 3 = 32 6 = 63				Options: see section 6	

(1): New series 50 of LIDD cover is highly recommended in combination with new high flow cartridges series 40
The use of old cartridges series 10, 11 and 31 may cause the impossibility to fully close the poppet

2 HYDRAULIC SYMBOLS

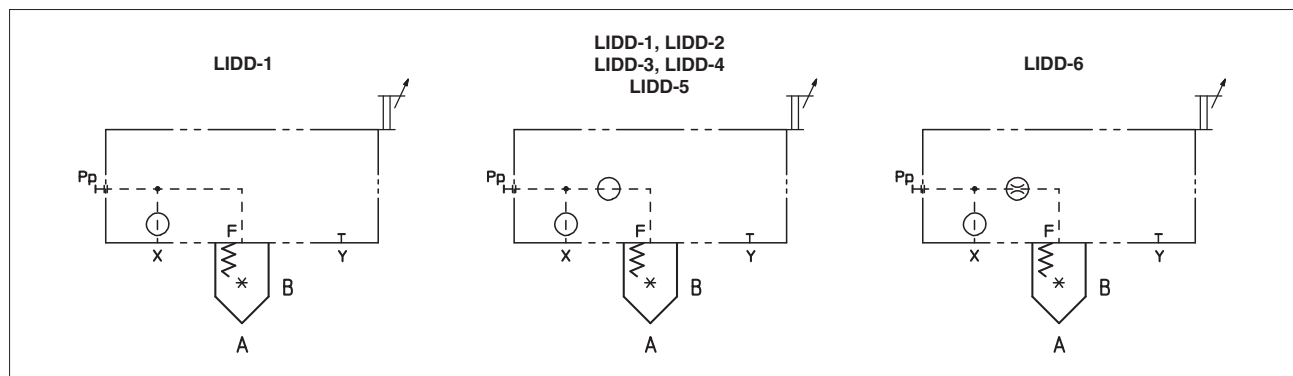

3 MODEL CODE OF SLIP-IN CARTRIDGES - for LIDD

SC LI	-	16	43	1	40	/	*
Cartridge according to ISO 7368						Seals material: - = NBR PE = FKM BT = HNBR	
Size, the same of relevant cover:						Series number (1)	
16 25 32 40 50 63						40 = all sizes	
Type of poppet						Spring cracking pressure, see section 4:	
32, 33 = without damping nose						1 2 3 6	
42 = as 32 but with damping nose							
43 = as 33 but with damping nose							

- (1) New series 40 is mechanically interchangeable with standard flow series 31, 11 and 10 - cavity according to ISO 7368
 New series 50 of LIDD cover is highly recommended in combination with new cartridges series 40
 The use of old cartridges series 10, 11 and 31 may cause the impossibility to fully close the poppet

4 TYPE OF POPPET

Type of poppet	32	33	42	43													
Functional sketch (Hydraulic symbol)																	
Typical section																	
Area ratio A:Ap	1:1,1	1:1,5	1:1,1	1:1,5													
Operating pressure	420 bar max																
Nominal flow at Δp 5 bar (l/min) see diagrams Q/Δp at section 7																	
Size 16	270	270	240	240													
Size 25	550	550	500	500													
Size 32	1000	1000	800	800													
Size 40	1700	1700	1400	1400													
Size 50	2500	2500	2200	2200													
Size 63	4000	4000	3300	3300													
Cracking pressure (bar)																	
Spring	1	2	3	6	1	2	3	6	1	2	3	6	1	2	3	6	
Size 16	A→B	0.3	1.5	3	5.3	0.6	1.6	2.9	5.1	0.3	1.7	3.3	6.1	0.7	1.9	3.3	5.7
	B→A	3.2	16	30.5	50.3	1.2	3.2	5.8	10	3.6	17.7	34.5	63.4	1.3	3.7	6.5	11.2
Size 25	A→B	0.3	1.5	3	5	0.6	1.4	3	5	0.3	1.7	3.3	6.1	0.7	1.5	3.3	5.8
	B→A	3.1	15.1	30.5	50.3	1.2	2.8	5.9	9.9	3.5	17.1	33.3	61.4	1.3	3	6.5	11.3
Size 32	A→B	0.3	1.5	3	5	0.6	1.6	3	5.4	0.3	1.7	3.7	6.3	0.7	1.8	3.4	6.3
	B→A	3.5	17	34.2	56.7	1.2	3.2	6	10.7	3.9	18.8	41.6	71.1	1.4	3.6	6.9	12.7
Size 40	A→B	0.3	1.5	3	5	0.6	1.5	3	5.5	0.4	1.8	3.5	6.4	0.7	1.8	3.6	7.3
	B→A	2.9	14.7	29.4	48.3	1.2	3	6	11	3.5	17.2	34	62	1.3	3.6	7.2	14.6
Size 50	A→B	0.3	1.5	3	4.3	0.6	1.6	3	4.8	0.4	1.7	3.4	5.2	0.7	1.9	3.4	5.7
	B→A	3.6	16.9	33.8	48.4	1.4	3.6	6.7	10.8	4.2	18.9	38.1	58.9	1.5	4.4	7.7	12.9
Size 63	A→B	0.3	1.5	2.9	4.2	0.6	1.5	2.9	5.8	0.4	1.7	3.4	4.7	0.7	1.8	3.3	6.5
	B→A	3.1	15	29.2	42	1.3	3.3	6.4	12.5	3.6	16.6	33.8	47.2	1.5	4	7.2	14.1

5 MAIN CHARACTERISTICS, SEALS AND HYDRAULIC FLUID

Assembly position / location	Any position		
Subplate surface finishing	Roughness index Ra 0,4 - flatness ratio 0,01/100 (ISO 1101)		
MTTFd values according to EN ISO 13849	150 years, for further details see technical table P007		
Ambient temperature	Standard execution = -30°C ÷ +70°C /PE option = -20°C ÷ +70°C /BT option = -40°C ÷ +70°C		
Compliance	RoHS Directive 2011/65/EU as last update by 2015/863/EU REACH Regulation (EC) n°1907/2006		
Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +80°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	15÷100 mm²/s - max allowed range 2.8 ÷ 500 mm²/s		
Max fluid contamination level	ISO4406 class 20/18/15 NAS1638 class 9, see also filter section at www.atos.com or KTF catalog		
Hydraulic fluid	Suitable seals type	Classification	Ref. Standard
Mineral oils	NBR, FKM, HNBR	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR, HNBR	HFC	
Flow direction	A to B or B to A		
Functional cover operating pressure	ports X, Y: 420 bar		

6 OPTIONS

/E = with external attachments X and underneath port X supplied plugged;

******* = Calibrated plugs different from standard ones. LIDD covers in standard executions are not equipped with restrictors in the pilot channels.
When ordering covers equipped with restrictors, it must be indicated at the end of the model code:

LIDD	-	1	/E	X	06
Channel where the restrictor has to be provided: X = channel X					Size of the throttling hole in tenths of millimeters: 05 = 0,5 mm 10 = 1 mm 06 = 0,6 mm 12 = 1,2 mm 08 = 0,8 mm 15 = 1,5 mm







Note: For LIDD-*/**E**, the calibrated orifices are located in the lateral port for external attachment
Calibrated orifices are not available for LIDD-1/E (size 16)

7 Q/ΔP DIAGRAMS - based on mineral oil ISO VG 46 at 50°C


SC LI slip-in cartridges, poppet type 32, 33, 42, 43

1 = poppet type 32 and 33


2 = poppet type 42 and 43

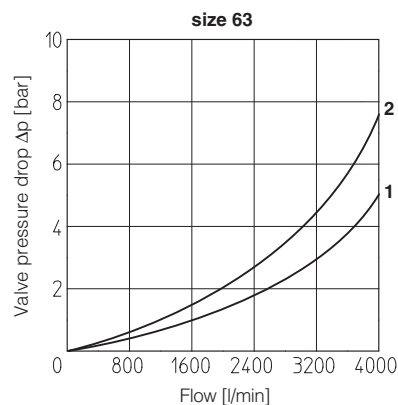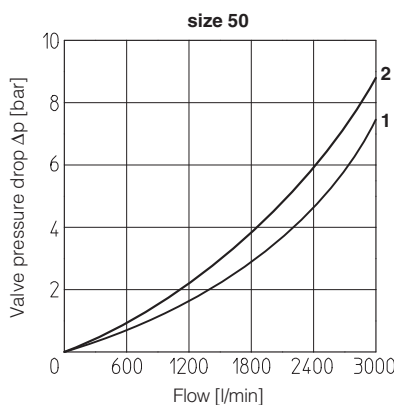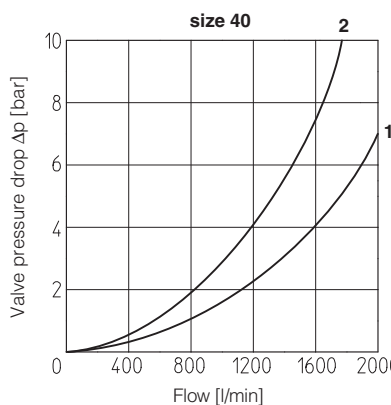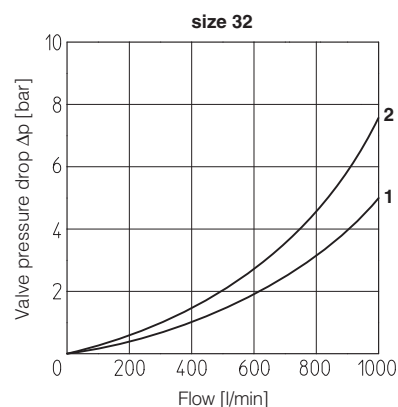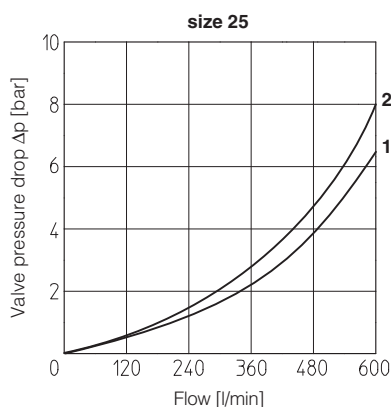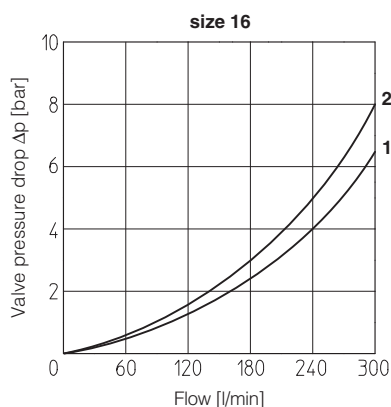

8 LIDD COVER DIMENSIONS [mm] - for mounting interface and cavity dimensions, see tech. table P006

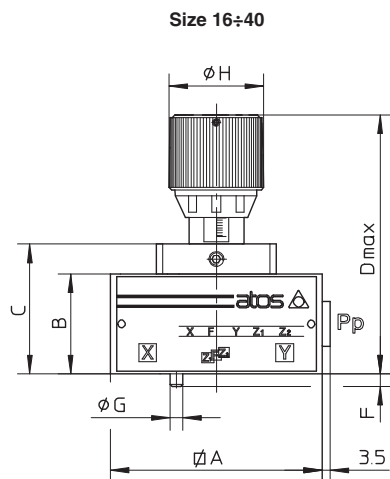

Note: for LIDD-1, the Pp port is on the opposite side of the represented version

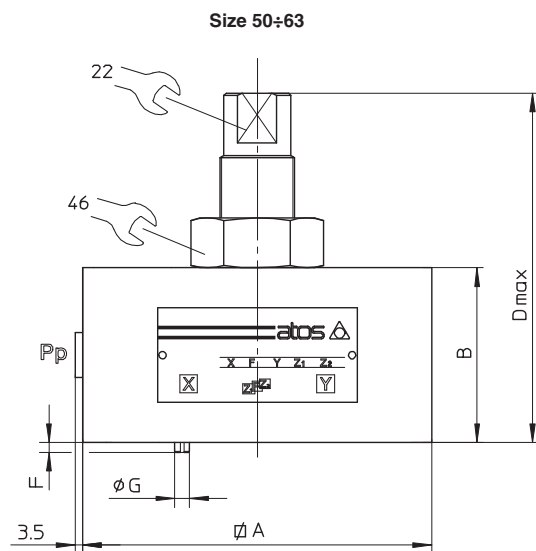

Covers	A	B	C	D (max)	F	G	H	Port Pp	Seals	Fastening bolts DIN 912 class 12.9	Tightening torque [Nm]	Mass [Kg]
LIDD-1	65	40	52	104	4	3	38	G 1/4"	2 OR-108	N°4 M8x45	35	2
LIDD-2	85	40	52	104	6	5	38	G 1/4"	2 OR-108	N°4 M12x45	125	2.4
LIDD-3	100	50	75	156	6	5	50	G 1/4"	2 OR-2043	N°4 M16x55	300	2.8
LIDD-4	125	60	85	166	6	5	50	G 1/4"	2 OR-3043	N°4 M20x70	600	6.7
LIDD-5	140	70	-	140	4	6	-	G 1/4"	2 OR-3043	N°4 M20x80	600	9.8
LIDD-6	180	80	-	151	4	6	-	G 3/8"	2OR-3050	N°4 M30x90	2100	17.5