


Flange mounting for manifolds

Max working pressure **250 bar**

N = without by-pass
(filter element SPSH-*N with collapse pressure 210 bar)

2 HYDRAULIC SYMBOLS (representation according to ISO 1219-1)

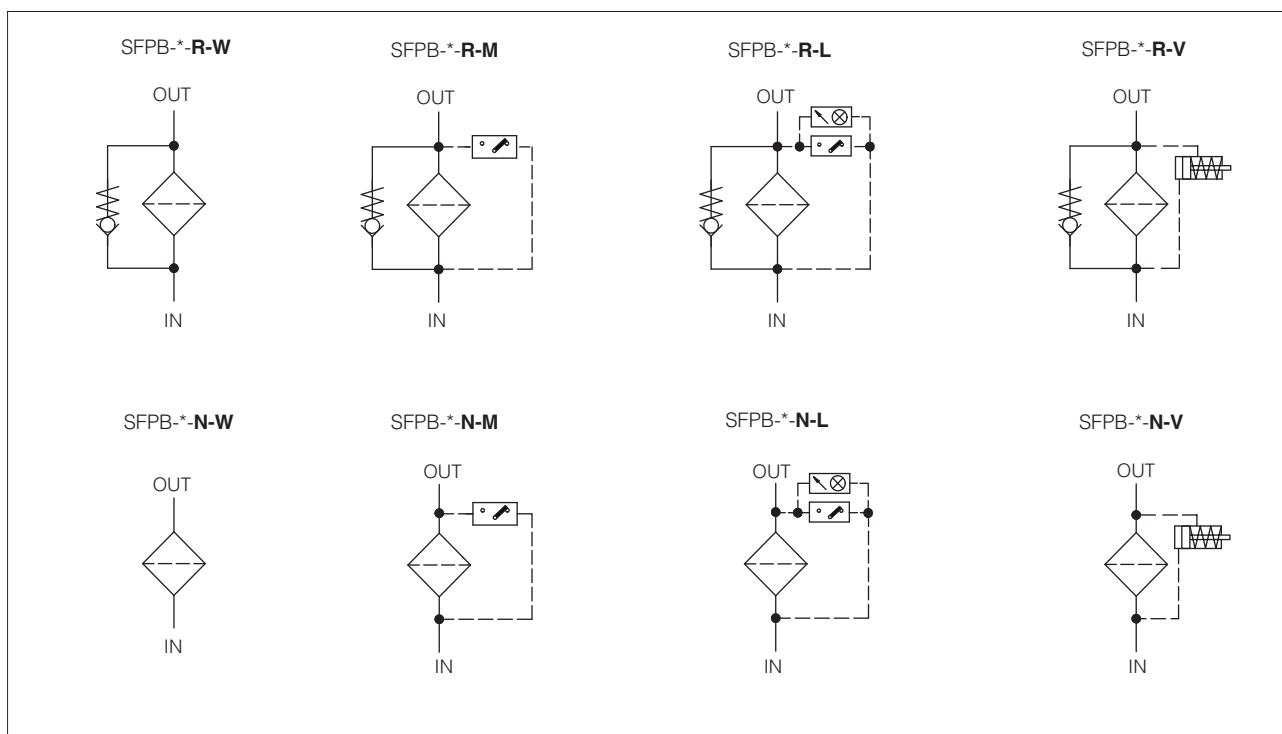

3 MODEL CODE OF FILTER ELEMENTS - only for spare **(1)**

SPSH	-	10	-	A	-	F10	-	R		*	/	*
Spare filter element for in line filter type SFPB										Series number		Seals material: - = NBR PE = FKM
Filter element size: 10 = for SFPB-10 and SFPB-15 20 = for SFPB-20 30 = for SFPB-30												
Filter element length: for SFPB-10 and PFB-15 for SFPB-20 for SFPB-30 A A A B B B C C D												
Microfibre filter element, $\beta_x(c) > 1000$ - ISO 16889: F03 = 5 μm (c) F06 = 7 μm (c) F10 = 12 μm (c) F20 = 22 μm (c) Filter element F01 = 4 μm (c) available on request												

(1) Select the filter element according to the model code reported on the filter nameplate, see section **17**

4 MODEL CODE OF DIFFERENTIAL CLOGGING INDICATORS - only for spare - see section 13 and 14

CID	-	E	05	-	M	*	/	*
Spare differential clogging indicator for in line filter						Series number		Seals material: - = NBR PE = FKM
Type of indicator: E = electrical V = visual T = thermostated (available on request) Z = electronic transmitter 4÷20 mA (available on request)				Optional LED - only for CID-E L = with LED M = without LED M/UL = without LED, certified according to North American Standard cURus (available on request)				
Differential switching pressure (only for CID-E and CID-V): 05 = 5 bar for filters with by-pass valve 08 = 8 bar for filters without by-pass valve								

5 GENERAL CHARACTERISTICS

Assembly position / location	Vertical position with the bowl downward
Ambient temperature range	Standard = -20°C ÷ +70°C /PE option = -20°C ÷ +70°C
Storage temperature range	Standard = -20°C ÷ +80°C /PE option = -20°C ÷ +80°C
Materials	Filter head Filter bowl
	Cast iron Carbon steel
Surface protection	Zinc coating with black passivation
Corrosion resistance	Salt spray test (EN ISO 9227) > 600 h
Fatigue strength	min. 1 x 10 ⁶ cycles at 0 ÷ 250 bar
Compliance	Tested to NFPA T3.10.5.1, ISO 10771, ISO 3968 RoHS Directive 2011/65/EU as last update by 2015/863/EU REACH Regulation (EC) n°1907/2006

6 HYDRAULICS CHARACTERISTICS - based on mineral oil ISO VG 46 at 50 °C (viscosity 32mm²/s)

Filter size		SFPB-10		SFPB-15		SFPB-20			SFPB-30			
Filter length		A	B	A	B	A	B	C	A	B	C	D
Max flow (l/min) at Δp= 1 bar Filter with by-pass -R (see note)	F03	42	65	44	79	83	98	127	96	182	234	279
	F06	57	82	64	109	119	138	173	140	246	295	340
	F10	75	93	95	137	172	194	232	203	294	333	380
	F20	90	100	132	160	225	246	281	261	343	375	400
Max flow (l/min) at Δp= 1 bar Filter without by-pass -N (see note)	F03	35	51	36	55	66	78	103	76	133	211	237
	F06	55	65	61	76	95	111	142	102	207	249	306
	F10	64	89	75	126	145	165	202	176	265	314	350
	F20	85	98	116	154	204	226	263	232	328	369	380
Max operating pressure	[bar]	250										
Burst pressure	[bar]	> 750										

Note: Max flow rates are measured with Δp= 1 bar and viscosity 32mm²/s. In case of different conditions see section 10 for filter sizing

7 FILTER ELEMENTS

Material		Inorganic microfibre
Filtration rating as per ISO16889	F03	β _{5μm (c)} ≥ 1000
	F06	β _{7μm (c)} ≥ 1000
	F10	β _{12μm (c)} ≥ 1000
	F20	β _{22μm (c)} ≥ 1000
Filter element collapse pressure	R = for filter with by-pass valve	21 bar
	N = for filter without by-pass valve	210 bar

8 SEALS AND HYDRAULIC FLUIDS - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = -30°C ÷ +100°C FKM seals (/PE option) = -25°C ÷ +120°C		
Recommended viscosity	15 ÷ 100 mm ² /s - max allowed range 2.8 ÷ 500 mm ² /s		
Hydraulic fluid	Suitable seals type	Classification	Ref. Standard
Mineral oils	NBR, FKM	HL, HLP, HLPD, HVLP, HVLDP	DIN 51524
Flame resistant without water	FKM	HF DU, HF DR	ISO 12922

9 BY-PASS VALVE

Filter with by-pass valve - version -R


The filter with by-pass valve ① is used in combination with filter elements SPSH-*-R with collapse pressure 21 bar.

The by-pass valve allows the oil flow to by-pass the filter element in particular conditions:


- it protects the filter element from pressure peaks that could be generated, especially at the cold system start-up. In these cases the valve opens only for the instant necessary to discharge the pressure peak, limiting the quantity of oil that bypasses the filter.
- it allows the free passage of the oil flow in case of completely clogged filter element ($\Delta p > 6$ bar).

This situation should be carefully avoided, by means of a scheduled maintenance, otherwise the contaminated oil will pass to the clean side of the filter and then it will circulate in the hydraulic system.

The filter element must be replaced before the clogging condition, at this purpose the use of a differential clogging indicator CID-V (visual, option V) or CID-E (electrical, options L or M) is highly recommended.



SFPB-*-R



SFPB-*-N

Filter without by-pass valve - version -N

The filter version without by-pass is recommended when the hydraulic system must be absolutely protected by contamination, then avoiding the risk that the contaminant passes through the by-pass valve.

The filter without by pass must be used in combination with filter elements SPSH-N with high collapse pressure 210 bar

10 FILTERS SIZING

For the filter sizing it is necessary to consider the Total Δp at the maximum flow at which the filter must work.

The Total Δp is given by the sum of filter head Δp plus the filter element Δp :

$$\text{Total } \Delta p = \text{filter head } \Delta p + \text{filter element } \Delta p$$





In the best conditions the total Δp should not exceed 1,0 bar

See below sections to calculate the Δp of filter head and Δp of the filter element

10.1 Q/ Δp DIAGRAMS OF FILTER HEAD

The pressure drop of filter head mainly depends on the ports size and fluid density

In the following diagrams are reported the Δp characteristics of filter head based on mineral oil with density 0,86 kg/dm³ and viscosity 32 mm²/s

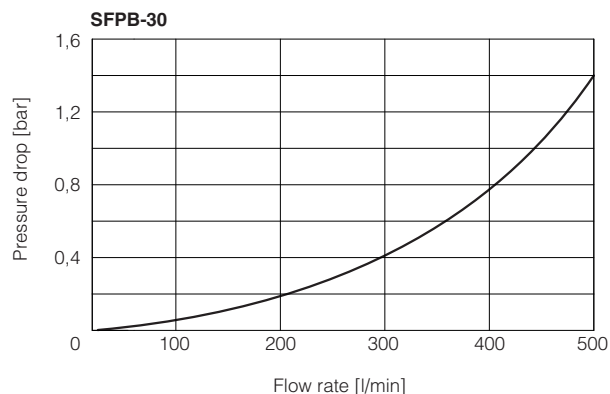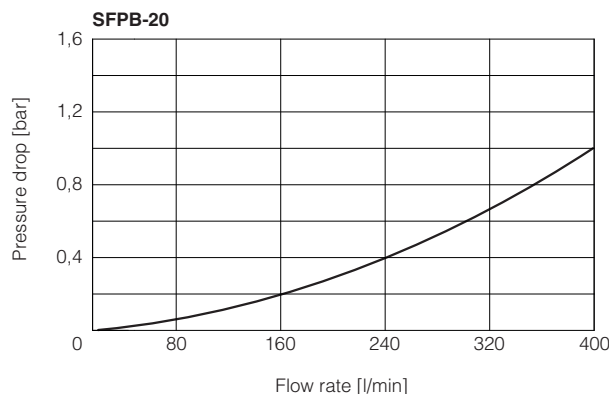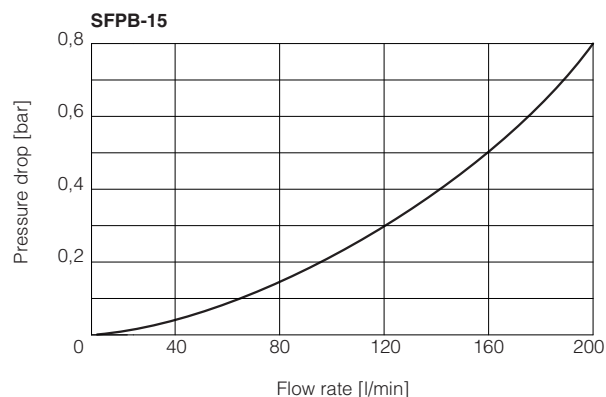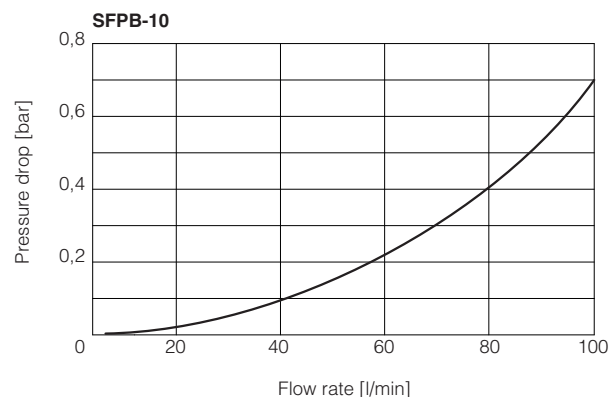

10.2 FILTER ELEMENT Δp

The pressure drop through the filter depends to:

- size of filter element
- filtration rating
- fluid viscosity

The Δp of filter element is given by the formula:

$$\Delta p \text{ of filter element} = Q \times \frac{Gc}{1000} \times \frac{\text{Viscosity}}{32}$$

Q = working flow (l/min)

Gc = Gradient coefficient (mbar/(l/min)).

The Gc values are reported in the following table

Viscosity = effective fluid viscosity in the working conditions (mm²/s)

Gradient coefficient Gc of SPSH filter elements

Filter element size		10		20			30			
Filter element length		A	B	A	B	C	A	B	C	D
Filter element type	Filtration rating	Gc Gradient coefficient								
R for filter with bypass valve	F03	21.30	10.84	11.07	9.23	6.74	10.26	4.82	3.27	2.30
	F06	13.97	6.79	7.27	6.06	4.43	6.73	2.98	1.99	1.26
	F10	8.39	4.42	4.45	3.71	2.71	4.12	2.02	1.36	0.70
	F20	4.78	2.93	2.87	2.39	1.75	2.66	1.21	0.77	0.40
N for filter without bypass valve	F03	26.03	16.72	14.19	11.83	8.64	13.00	7.15	3.87	3.21
	F06	14.77	11.25	9.50	7.92	5.79	9.63	4.00	2.93	1.80
	F10	11.57	5.25	5.66	4.72	3.45	5.05	2.57	1.67	1.10
	F20	6.13	3.34	3.41	2.84	2.07	3.33	1.44	0.83	0.70

Example:

Calculation of Total Δp for filter type SFPB-10-B-F10-R at Q = 80 l/min and viscosity 46 mm²/s (filter element SPSH-10-B-F10-R)

Δp of filter head = 0,41 bar



Gr = 4,42 mbar/(l/min)

$$\text{Filter element } \Delta p = 80 \times \frac{4,42}{1000} \times \frac{46}{32} = 0,51 \text{ bar}$$


Total Δp = 0,41 + 0,51 = **0,92 bar**

11 BY-PASS VALVE - based on mineral oil ISO VG46 at 50°C (viscosity = 32 mm²/s)

Q/ Δp diagrams of flow through the by-pass valve

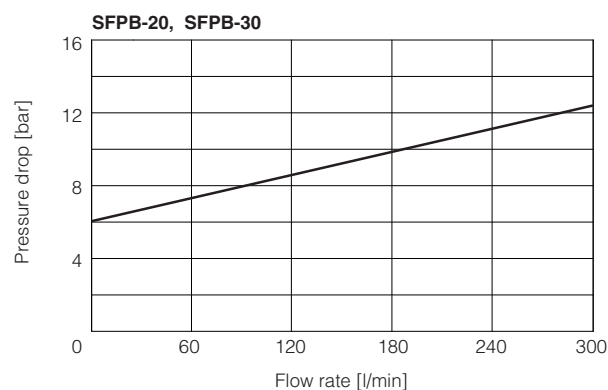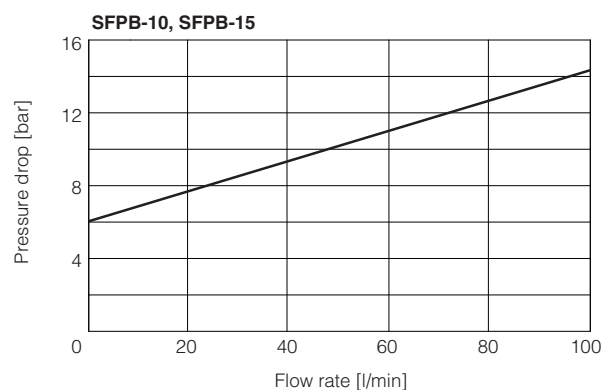


SFPB -10

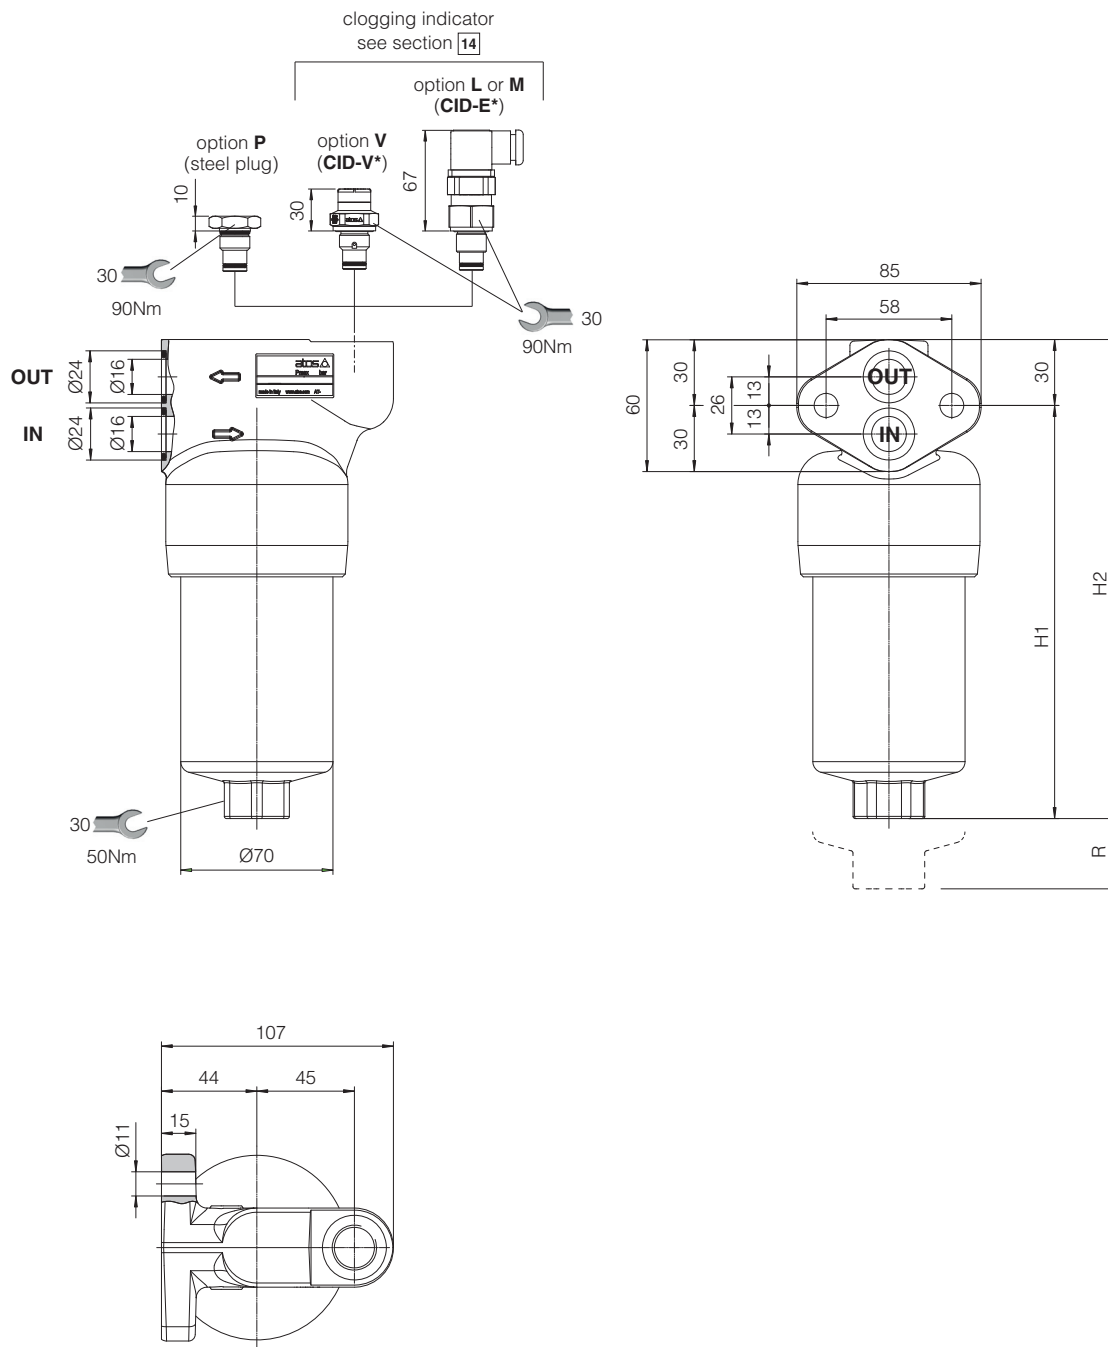


Code	H1	H2	R (element removal)	Mass (Kg)
SFPB-10-A	188	226	110	3.8
SFPB-10-B	281	319		4.9

SFPB -15

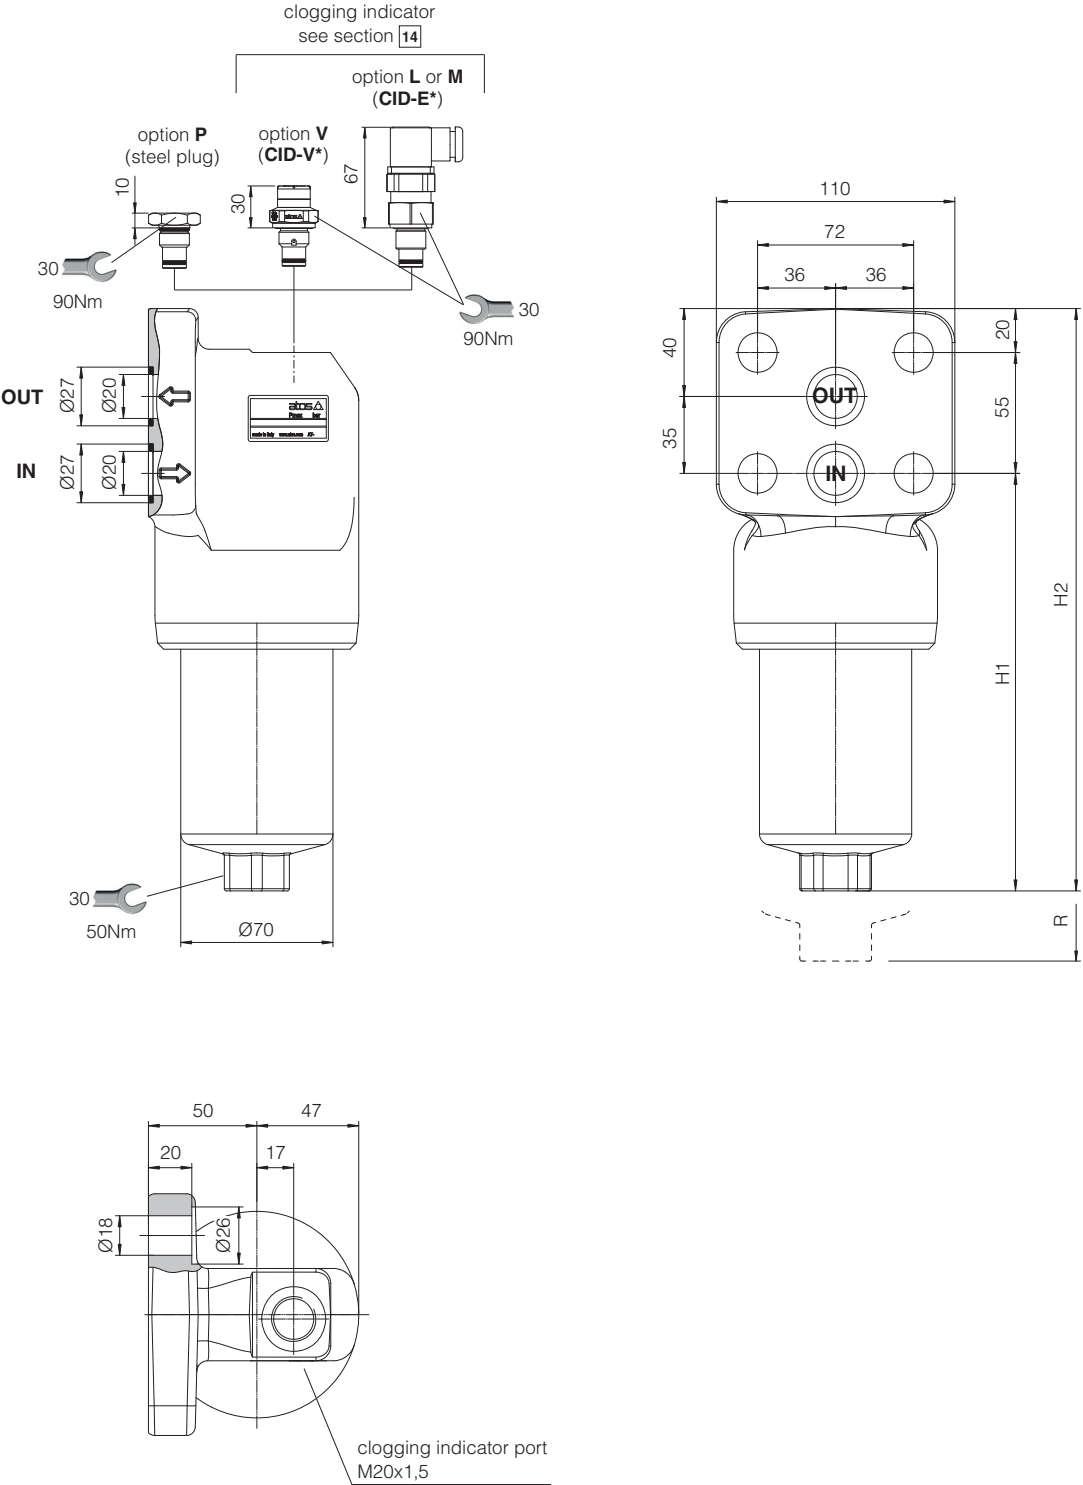


Code	H1	H2	R (element removal)	Mass (Kg)
SFPB-15-A	190	265	110	6
SFPB-15-B	283	358		7.1

SFPB -20




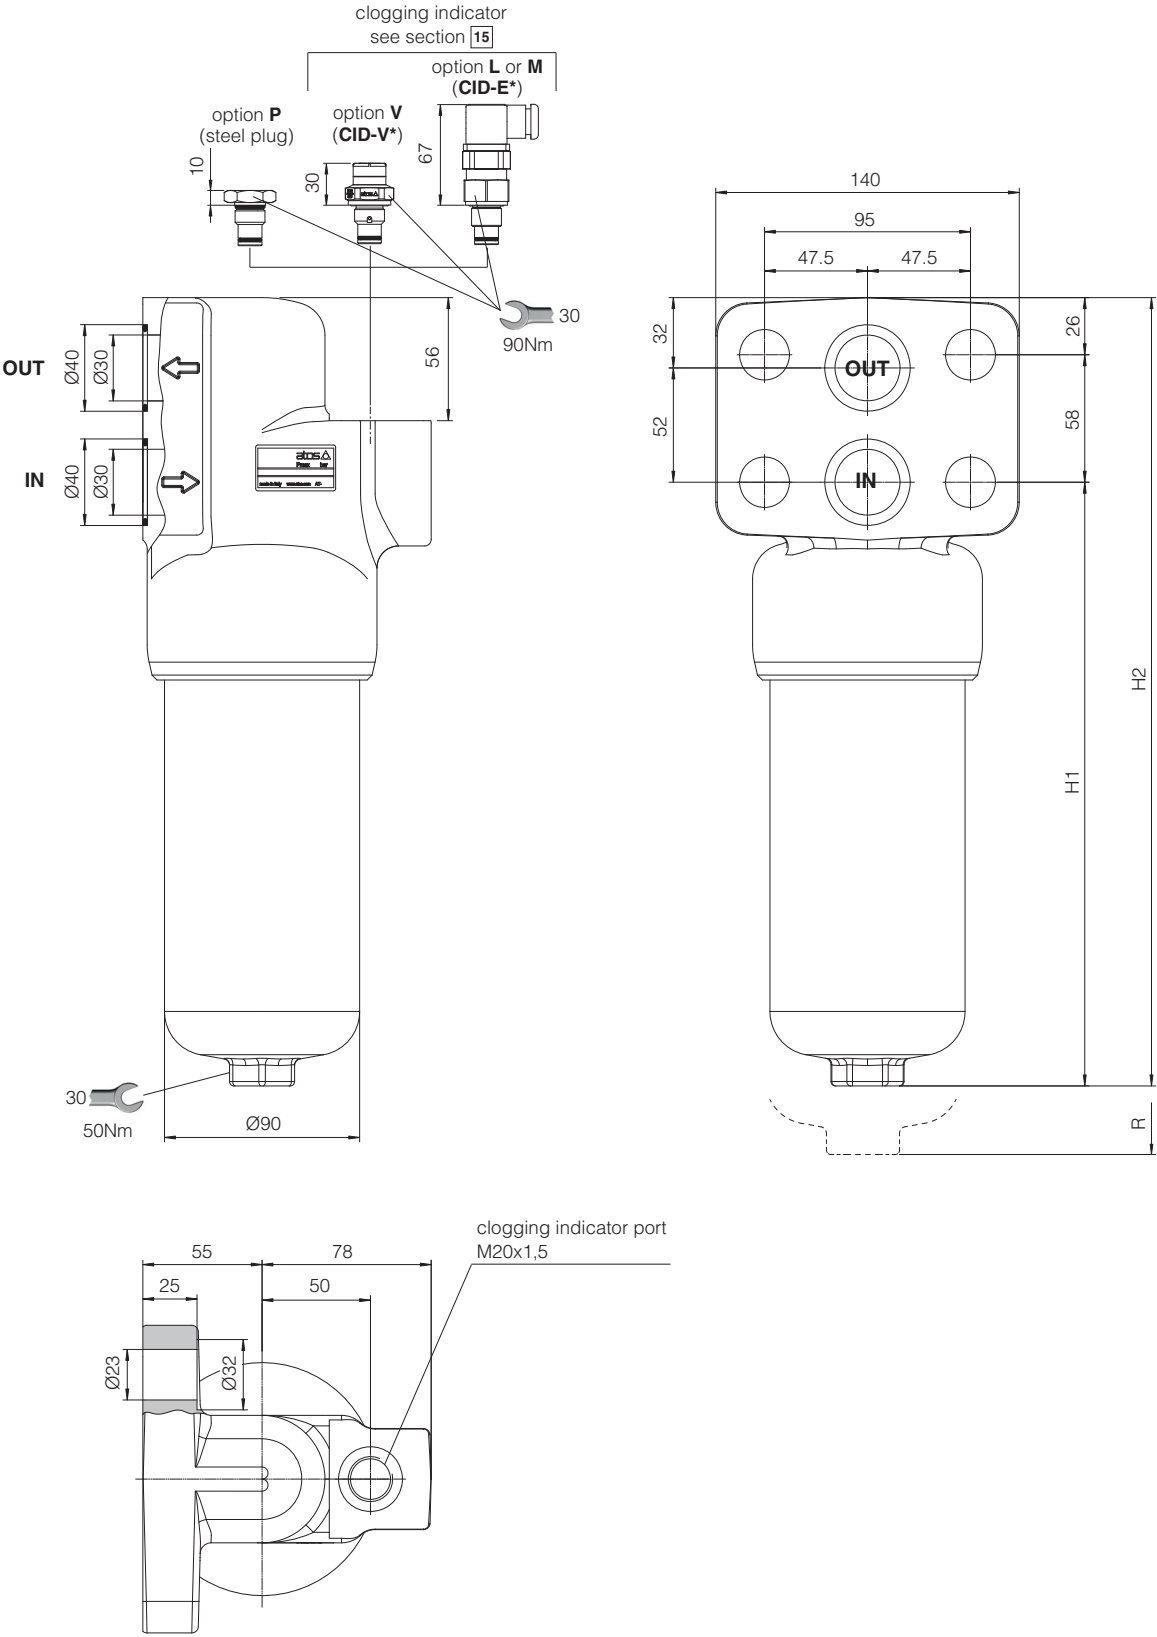


Code	H1	H2	R (element removal)	Mass (Kg)
SFPB-20-A	240	324	120	9.8
SFPB-20-B	299	383		11
SFPB-20-C	369	453		12.3


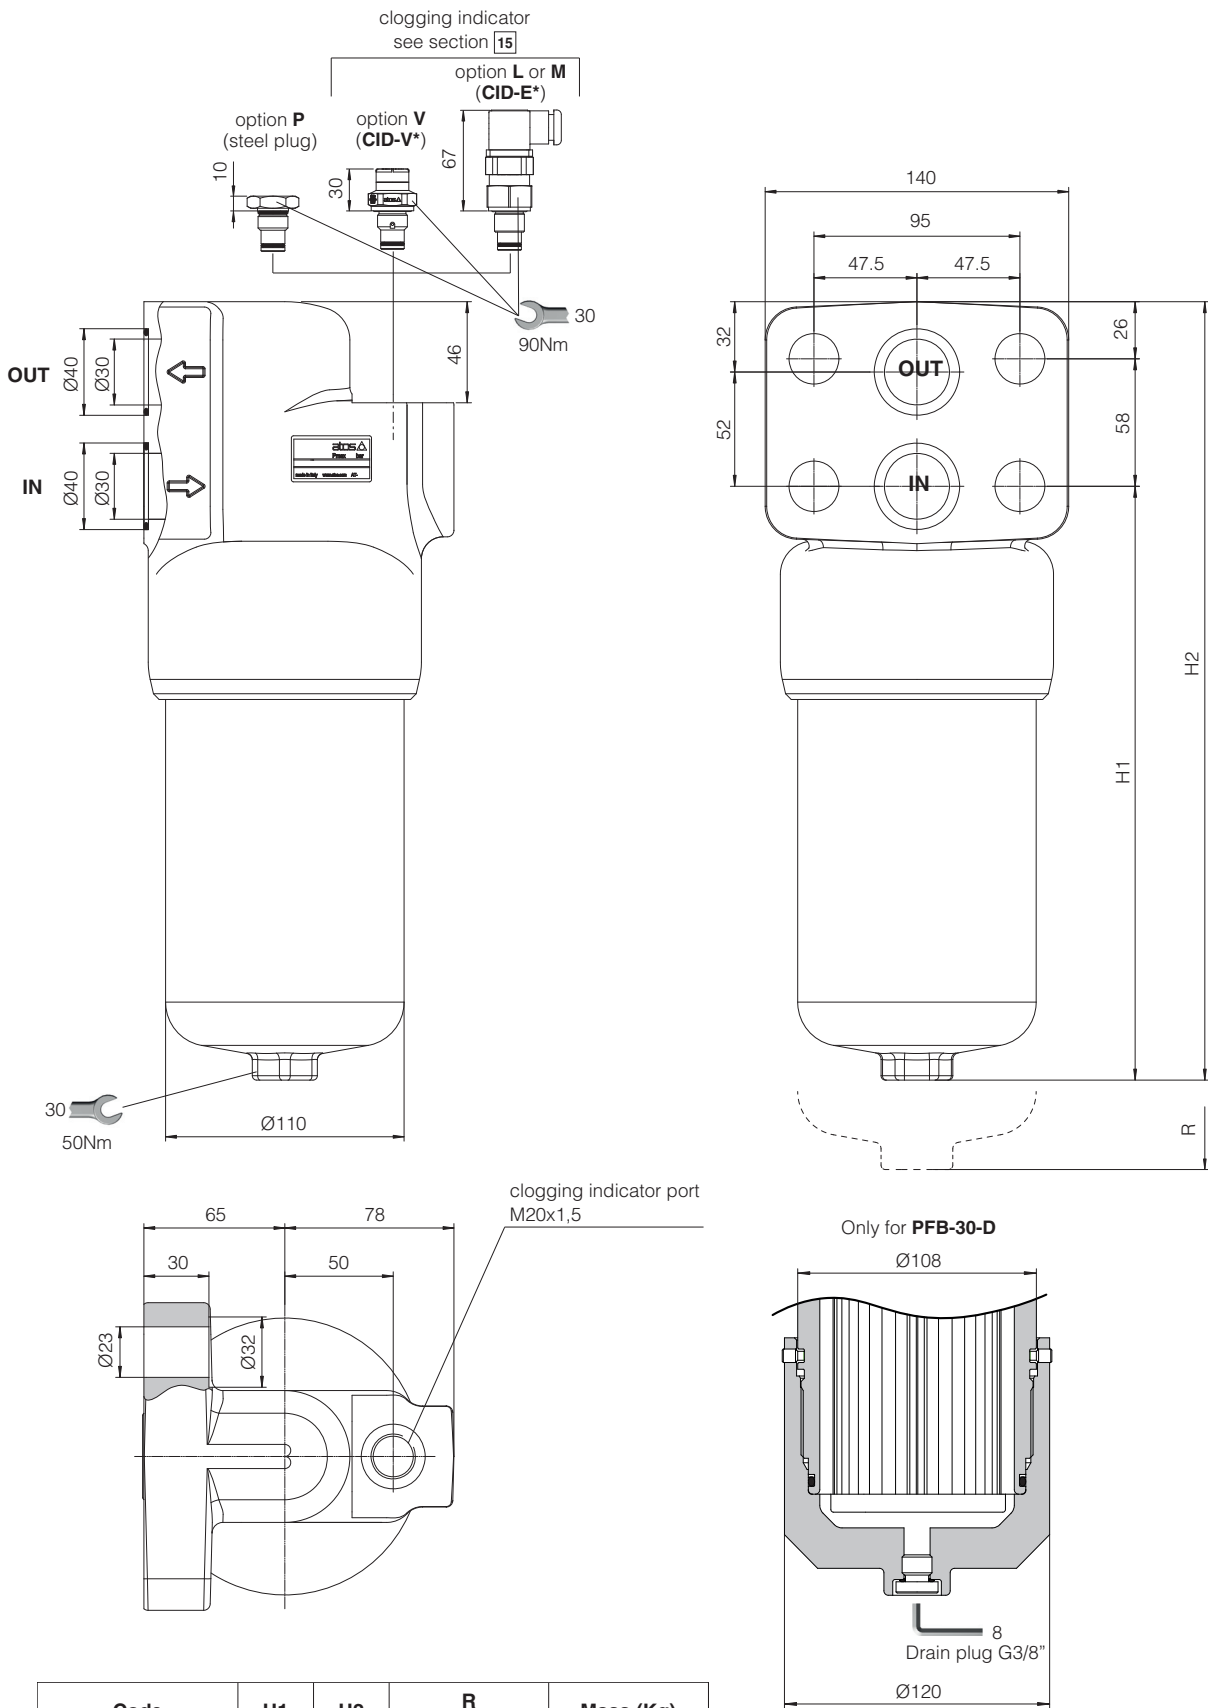
SFPB -30

Code	H1	H2	R (element removal)	Mass (Kg)
SFPB-30-A	202	287	130	12.2
SFPB-30-B	295	380		14.8
SFPB-30-C	415	500		18
SFPB-30-D	514	599		20.8

13 CHARACTERISTICS OF DIFFERENTIAL CLOGGING INDICATORS

Model code		CID-E* ELECTRICAL		CID-V* VISUAL
Differential switching pressure	CID-E05, CID-V05	5 bar $\pm$ 10%		5 bar $\pm$ 15%
	CID-E08, CID-V08	8 bar $\pm$ 10%		8 bar $\pm$ 10%
Max pressure		450 bar		420 bar
Max differential pressure		200 bar		
Ambient temperature		-25°C $\div$ +100°C		-25°C $\div$ +80°C
Hydraulic connection		M20x1,5		
Duty factor		100%		
Mechanical life		1 x 10 ⁶ operations		
Mass (Kg)		0,16		0,11
Electric connection		Electric plug connection as per DIN 43650 with cable gland type PG7		-
Power supply	CID-E05-L, CID-E08-L	24 V _{DC} $\pm$ 10%		-
	CID-E05-M, CID-E08-M	14 V _{DC} $\div$ 30 V _{DC}	125 V _{AC} $\div$ 250 V _{AC}	-
Max current - resistive (inductive)		5 A (4 A) $\div$ 4 A (3 A)	5 A (3 A) $\div$ 3 A (2 A)	-
Protection degree to DIN EN 60529		IP65 with mating connector		-
Switching scheme		CID-*L 	CID-*M 	clean filter element GREEN
		clogged filter element 	clogged filter element 	RED

14 DIMENSIONS OF DIFFERENTIAL CLOGGING INDICATORS

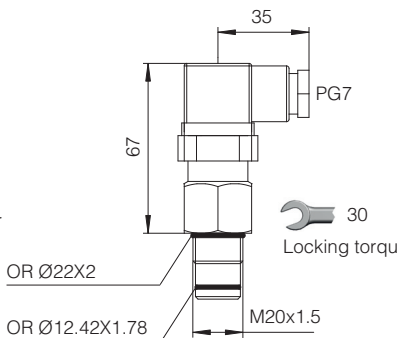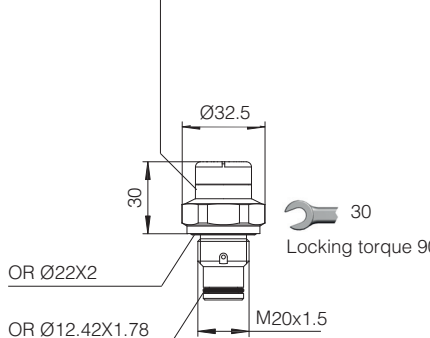ELECTRICAL INDICATOR		VISUAL INDICATOR	
CID-E05-L CID-E08-L	Led signal: Green = clean filter element Red = clogged filter element (filter elements to be replaced)	CID-V05 CID-V08	Visual signal: Green = clean filter element Red = clogged filter element (filter elements to be replaced)
Electric connector DIN 43650 Transparent with internal Led			
CID-E05-M CID-E08-M CID-E05-M/UL CID-E08-M/UL			
Electric connector DIN 43650 Black colour			
			
OR Ø22X2		OR Ø22X2	
OR Ø12.42X1.78		OR Ø12.42X1.78	
Note: the electrical connector can be oriented at steps of 90°			

NOTE: Differential thermostated indicator CID-T and differential electronic transmitter with output signal 4÷20 mA CID-Z are available on request

15 INSTALLATION AND COMMISSIONING


The max operating pressure of the system must not exceed the max working pressure of the filter (350 bar).

During the filter installation, pay attention to respect the flow direction, shown by the arrows on the filter head.

The filter should be preferably mounted with the bowl downward.

Make sure that there is enough space for the replacement of the filter element, see dimension "R" at section 13.

Never run the system without the filter element.

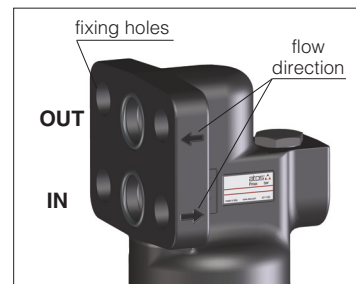

For filters ordered with clogging indicator:

- remove the plastic plug from the indicator port on the filter head
- install the clogging indicator and lock it at the specified torque

During the cold start up (fluid temperature lower than 30°C), a false clogging indicator signal can be given due to the high fluid viscosity.

To avoid false signal, a differential thermostated clogging indicator CID-T can be used.



16 MAINTENANCE

The filter element must be replaced as soon as the clogging indicator switches to highlight the filter clogged condition.

For filters without clogging indicator, the filter element must be replaced according to the system manufacturer's recommendations.

Select the new filter element according to the model code reported on the filter nameplate, see section 18.

For the replacement of the filter element, proceed as follow:

- releases the system pressure; the filter has no pressure bleeding device (only for PFB-30-D has a drain plug G1/4" at the bottom of the bowl)
- pay attention to the fluid and filter surface temperature. Always use suitable gloves and protection glasses
- unscrew the bowl (2) from the filter head (1) by turning counterclockwise (view from bottom side)
- remove the dirty filter element (3) pulling it carefully
- lubricate the seal of new filter element and insert it over the spigot in the filter head
- clean the bowl internally, check the o-ring (6) and replace it if damaged
- lubricate the o-ring, the threads and screw by hand the bowl to the filter head by turning clockwise (view from bottom side). Tighten at the recommended torque.



WARNING: The dirty filter elements cannot be cleaned and re-used. They are classified as "dangerous waste material", then they must be disposed of by authorized Companies, according to the local laws.


16.1 SEALS KIT

Filter type	Seal kit code (NBR)	Seal kit code (FKM)	Seal kit composition
SFPB-10	GUARN SFPB-10	GUARN SFPB-10 /PE	④+⑤+⑥+⑦
SFPB-15	GUARN SFPB-15	GUARN SFPB-15 /PE	④+⑤+⑥+⑦
SFPB-20	GUARN SFPB-20	GUARN SFPB-20 /PE	④+⑤+⑥+⑦
SFPB-30	GUARN SFPB-30	GUARN SFPB-30 /PE	④+⑤+⑥+⑦+⑧+⑨+⑩


(1) Seals (8) and (9) are supplied in seal kit but used only for SFPB-30-D



17 FILTER IDENTIFICATION NAMEPLATE

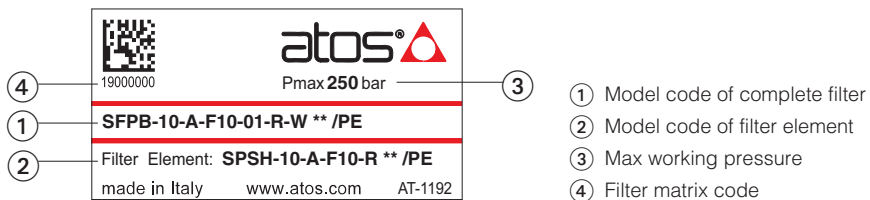

17.1 IDENTIFICATION OF FILTER ELEMENT

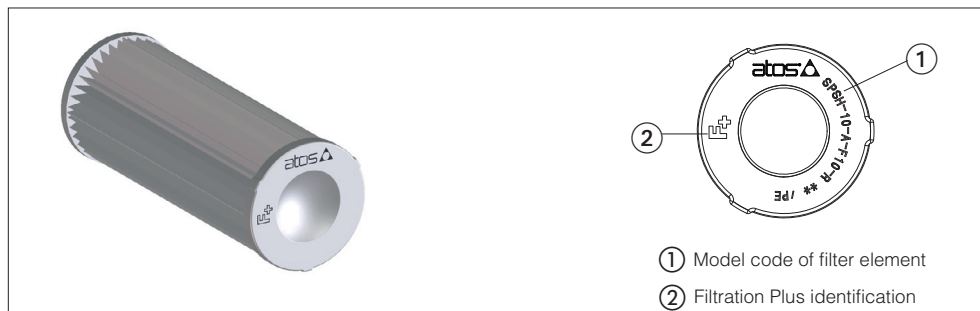

18 RELATED DOCUMENTATION

LF010	Fluid contamination
LF020	Filtration guidelines