


Ex-proof proportional directional valves high performance

direct, with LVDT transducer and positive spool overlap - **ATEX, IECEx, EAC, PESO, CCC** or **cULus**

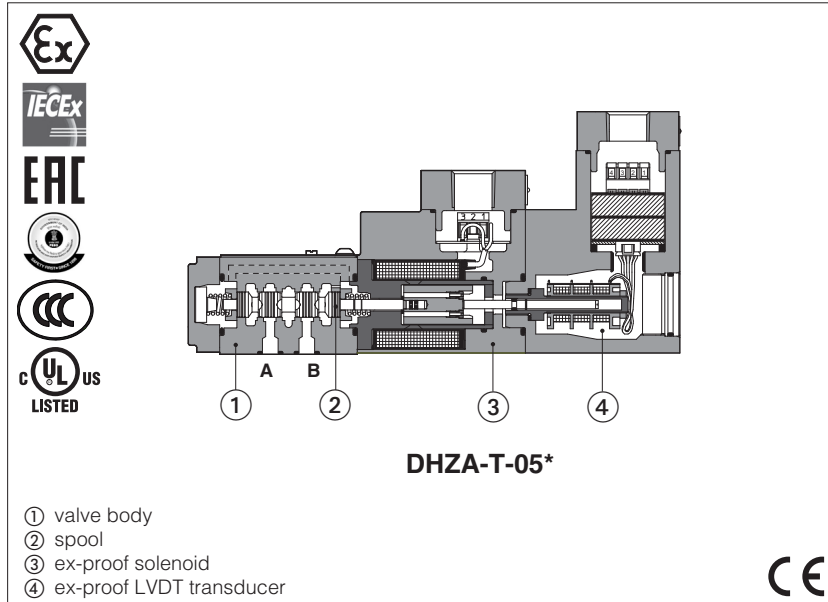

DHZA-T, DKZA-T

Ex-proof high performance proportional valves direct, with LVDT position transducer and positive spool overlap, for best dynamics in directional controls and not compensated flow regulations.

They are equipped with ex-proof proportional solenoids and LVDT transducer certified for safe operations in hazardous environments with potentially explosive atmosphere.

Certifications:












- Multicertification **ATEX, IECEx, EAC, PESO, CCC** for gas group **II 2G** and dust category **II 2D**
- Multicertification **ATEX** and **IECEx** for gas group **I M2** (mining)
- **cULus** North American certification for gas group **C&D**

The flameproof enclosure of solenoid and transducer, prevents the propagation of accidental internal sparks or fire to the external environment.


The solenoids are also designed to limit the surface temperature within the classified limits.

| | |
|------------------------------|------------------------------|
| DHZA: | DKZA: |
| Size: 06 - ISO 4401 | Size: 10 - ISO 4401 |
| Max flow: 60 l/min | Max flow: 150 l/min |
| Max pressure: 350 bar | Max pressure: 315 bar |


1 MODEL CODE

| | | | | | | | | | | | | | | | | | | |
|--|---|----------|---|----------|---|----------|-----------|---|----------|----------|---|----------|---|----------|---|----------|---|----------|
| DHZA | / | * | - | T | - | 0 | 71 | - | L | 5 | / | M | / | * | / | * | / | * |
| <p>Ex-proof proportional directional valves, direct</p> <p>DHZA = size 06 DKZA = size 10</p> <p>Certification type: Multicertification ATEX, IECEx, EAC, PESO, CCC: - = omit for Group II 2G / 2D (1) M = Group I (mining) North American Certification: UL = cULus</p> <p>T = with LVDT transducer</p> <p>Valve size ISO 4401: 0 = 06 1 = 10</p> <p>Configuration: Standard Option /B</p> <p>51 =  </p> <p>53 =  </p> <p>71 =  </p> <p>73 =  </p> | | | | | | | | | | | | | | | | | | |
| <p>Seals material, see section 6 :</p> <p>- = NBR PE = FKM BT = HNBR (2)</p> <p>Series number</p> <p>Voltage code: - = standard coil for 24 Vdc Atos drivers 24 = optional coil for 24 Vdc low current drivers</p> <p>Options (3): B = solenoid and position transducer at side of port A C = position transducer with current feedback 4÷20 mA Y = external drain</p> <p>Solenoid and transducer threaded connection for cable gland fitting: GK = GK-1/2" - not for cULus (4) M = M20x1,5 - not for cULus NPT = 1/2" NPT</p> | | | | | | | | | | | | | | | | | | |
| <p>Spool size: 14 (L) 1 (L) 2 (S) 3 (L,S,D) 5 (L,S,D)</p> <p>DHZA = 1 4,5 8 18 28</p> <p>DKZA = - - - 45 75</p> <p>Nominal flow (l/min) at Δp 10 bar P-T</p> | | | | | | | | | | | | | | | | | | |
| <p>Spool type, regulating characteristics:</p> <p>L = linear S = progressive D = differential-progressive</p> <p>  </p> <p>P-A = Q, B-T = Q/2 P-B = Q/2, A-T = Q</p> | | | | | | | | | | | | | | | | | | |

Configuration: **Standard** **Option /B**

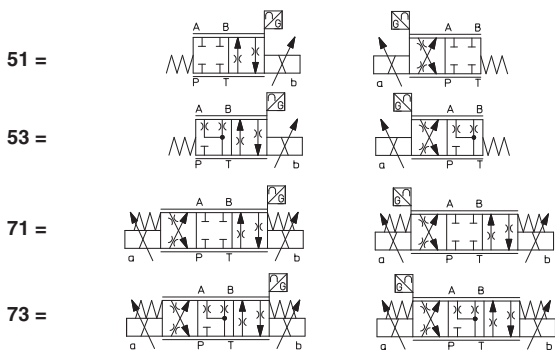

Spool type, regulating characteristics:



(1) The valves with Multicertification for Group II are also certified for Indian market according to **PESO** (Petroleum and Explosives Safety Organization). The PESO certificate can be downloaded from www.atos.com

(2) Not for multicertification **M** group I (mining) **(3)** Possible combined options: /BC, /BY, /CY, /BCY **(4)** Approved only for the Italian market

2 ELECTRONIC DRIVERS

Electronic drivers are factory set with max current limitation for ex-proof valves.

Please include in the driver order also the complete code of the connected ex-proof proportional valve.

| | | |
|---------------|----------------|---------------|
| Drivers model | E-BM-TEB-* /A | E-BM-TES-* /A |
| Type | digital | digital |
| Format | DIN-rail panel | |
| Data sheet | GS230 | GS240 |

3 GENERAL CHARACTERISTICS

| | |
|--|---|
| Assembly position | Any position |
| Subplate surface finishing to ISO 4401 | Acceptable roughness index, Ra ≤0,8 recommended Ra 0,4 - flatness ratio 0,01/100 |
| MTTFd valves according to EN ISO 13849 | 150 years, see technical table P007 |
| Ambient temperature range | Standard = -20°C ÷ +70°C /PE option = -20°C ÷ +70°C /BT option = -40°C ÷ +60°C |
| Storage temperature range | Standard = -20°C ÷ +80°C /PE option = -20°C ÷ +80°C /BT option = -40°C ÷ +70°C |
| Surface protection | Zinc coating with black passivation - salt spray test (EN ISO 9227) > 200h |
| Compliance | Explosion proof protection, see section 7 -Flame proof enclosure "Ex d" -Dust ignition protection by enclosure "Ex t" RoHS Directive 2011/65/EU as last update by 2015/863/EU REACH Regulation (EC) n°1907/2006 |

4 HYDRAULIC CHARACTERISTICS - based on mineral oil ISO VG 46 at 50 °C

| Valve model | DHZA | | | | | DKZA | | |
|-------------------------------------|---|-----|-----|------------|------------|---|------------|-----|
| Pressure limits [bar] | ports P, A, B = 350; T = 210 (250 with external drain /Y) Y = 10 | | | | | ports P, A, B = 315; T = 210 (250 with external drain /Y) Y = 10 | | |
| Configuration | 51, 53, 71, 73 | | | | | 51, 53, 71, 73 | | |
| Spool type | L14 | L1 | S2 | L3, S3, D3 | L5, S5, D5 | L3, S3, D3 | L5, S5, D5 | |
| Max flow [l/min] | | | | | | | | |
| Δp P-T | Δp = 10 bar | 1 | 4,5 | 8 | 18 | 28 | 45 | 75 |
| | Δp = 30 bar | 1,7 | 8 | 14 | 30 | 50 | 80 | 130 |
| | max permissible flow | 2,6 | 1 | 21 | 40 | 60 | 90 | 150 |
| | Δp max P-T [bar] | 70 | 70 | 70 | 50 | 50 | 40 | 40 |
| Leakage [cm³/min] | <30 (at p = 100 bar); <135 (at p = 350 bar) | | | | | <80 (at p = 100 bar); <600 (at p = 315 bar) | | |
| Response time (1) [ms] | ≤ 20 | | | | | ≤ 25 | | |
| Hysteresis [% of max regulation] | ≤ 0,2 | | | | | ≤ 0,2 | | |
| Repeatability [% of max regulation] | ± 0,1 | | | | | ± 0,1 | | |
| Thermal drift | zero point displacement < 1% at ΔT = 40°C | | | | | | | |

Note: above performance data refer to valves coupled with Atos electronic drivers, see section 2

(1) 0-100% step signal

5 ELECTRICAL CHARACTERISTICS

| | |
|---|---|
| Max. power | 35W |
| Insulation class | H (180°) Due to the occurring surface temperatures of the solenoid coils, the European standards ISO 13732-1 and EN982 must be taken into account |
| Protection degree with relevant cable gland | Multicertification: IP66/67 to DIN EN60529 UL: raintight enclosure, UL approved |
| Duty factor | Continuous rating (ED=100%) |
| Voltage code | standard |
| Coil resistance R at 20°C | 3,2 Ω |
| Max. solenoid current | 2,5 A |

6 SEALS AND HYDRAULIC FLUID - for other fluids not included in below table, consult Atos Technical Office

| | | | |
|--------------------------------------|---|--|-----------------------------|
| Seals, recommended fluid temperature | NBR seals (standard) = -20°C ÷ +60°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C | | |
| Recommended viscosity | 20 ÷ 100 mm²/s - max allowed range 15 ÷ 380 mm²/s | | |
| Max fluid contamination level | normal operation | ISO4406 class 18/16/13 NAS1638 class 7 | see also filter section at |
| | longer life | ISO4406 class 16/14/11 NAS1638 class 5 | www.atos.com or KTF catalog |
| Hydraulic fluid | Suitable seals type | Classification | Ref. Standard |
| Mineral oils | NBR, FKM, HNBR | HL, HLP, HLPD, HVLP, HVLPD | DIN 51524 |
| Flame resistant without water | FKM | HFDU, HFDR | ISO 12922 |
| Flame resistant with water (1) | NBR, HNBR | HFC | |

 The ignition temperature of the hydraulic fluid must be 50°C higher than the max solenoid surface temperature

(1) **Performance limitations in case of flame resistant fluids with water:**

- max operating pressure = 210 bar
- max fluid temperature = 50°C

7 CERTIFICATION DATA

| | | | | | |
|-------------------------------------|---|--------------|---|--|--------------|
| Valve type | DHZA, DKZA | | DHZA/M, DKZA/M | DHZA/UL, DKZA/UL | |
| Certifications | Multicertification Group II ATEX, IECEX, EAC, PESO, CCC | | Multicertification Group I ATEX IECEX | North American cULus | |
| Solenoid certified code | OZA-T | | OZAM-T | OZA-T/EC | |
| Type examination certificate (1) | ATEX: CESI 02 ATEX 014 IECEX: IECEX CES 10.0010x EAC:RU C - IT.AJK38.B.00425/21 PESO: P468212/2 CCC: 2020322307003240 | | ATEX: CESI 03 ATEX 057x IECEX: IECEX CES 12.0007x | 20170324 - E366100 | |
| Method of protection | <ul style="list-style-type: none"> • ATEX Ex II 2G Ex db IIC T4/T3 Gb Ex II 2D Ex tb IIIC T135°C/T200°C Db • IECEX Ex db IIC T4/T3 Gb Ex tb IIIC T135°C/T200°C Db • EAC 1Ex d IIC T4/T3 Gb X Ex tb IIIC T135°C/T200°C Db X • PESO Ex db IIC T4/T3 Gb • CCC Ex d IIC T4/T3 Gb Ex tD A21 IP66/IP67 T135°C/T200°C | | <ul style="list-style-type: none"> • ATEX Ex I M2 Ex db I Mb • IECEX Ex db I Mb | <ul style="list-style-type: none"> • UL 1203 Class I, Div.I, Groups C & D Class I, Zone I, Groups IIA & IIB | |
| Temperature class | T4 | T3 | - | T4 | T3 |
| Surface temperature | ≤ 135 °C | ≤ 200 °C | ≤ 150 °C | ≤ 135 °C | ≤ 200 °C |
| Ambient temperature (2) | -40 ÷ +40 °C | -40 ÷ +70 °C | -20 ÷ +60 °C | -40 ÷ +55 °C | -40 ÷ +70 °C |
| Applicable standards | EN 60079-0 EN 60079-1 EN 60079-31 | | IEC 60079-0 IEC 60079-1 IEC 60079-31 | UL 1203 and UL429, CSA 22.2 n°30 CSA 22.2 n°139-13 | |
| Cable entrance: threaded connection | GK = GK-1/2" M = M20x1,5 NPT = 1/2" NPT | | | 1/2" NPT | |

(1) The type examination certificates can be downloaded from www.atos.com

(2) The solenoids **Group II** and **cULus** are certified for minimum ambient temperature -40°C

In case the complete valve must withstand with minimum ambient temperature of -40°C, select **/BT** in the model code

⚠ WARNING: service work performed on the valve by the end users or not qualified personnel invalidates the certification

8 EX PROOF SOLENOIDS WIRING

Multicertification

n°8 M4x20 locking torque 4Nm

- ① solenoid cover with threaded connection for cable gland fitting
- ② transducer cover with threaded connection for cable gland fitting
- ③ solenoid terminal board for cables wiring
- ④ transducer terminal board for cables wiring
- ⑤ screw terminal for additional equipotential grounding

Solenoid wiring

| | | |
|--|----------|--|
| | 1 = Coil | PCB 3 poles terminal board suitable for wires cross sections up to 2,5 mm ² (max AWG14) |
| | 2 = GND | |
| | 3 = Coil | |

Position transducer wiring

| | | |
|--|-------------------|--|
| | 1 = Output signal | PCB 4 poles terminal board suitable for wires cross sections up to 2,5 mm ² (max AWG14) |
| | 2 = Supply -15 V | |
| | 3 = Supply +15 V | |
| | 4 = GND | |

cULus certification

n°8 M4x20 locking torque 4Nm

- ① solenoid cover with threaded connection for cable gland fitting
- ② transducer cover with threaded connection for cable gland fitting
- ③ solenoid terminal board for cables wiring
- ④ transducer terminal board for cables wiring

Solenoid wiring

⚠ Pay attention to respect the polarity

| | | |
|--|------------|--|
| | 1 = Coil + | PCB 3 poles terminal board suggested cable section up to 1,5 mm ² (max AWG16), see section 9 note 1 |
| | 2 = GND | |
| | 3 = Coil - | |

alternative GND screw terminal connected to solenoid housing

Position transducer wiring

| | | |
|--|-------------------|--|
| | 1 = Output signal | PCB 4 poles terminal board suggested cable section up to 1,5 mm ² (max AWG16), see section 9 note 1 |
| | 2 = Supply -15 V | |
| | 3 = Supply +15 V | |
| | 4 = GND | |

9 CABLE SPECIFICATION AND TEMPERATURE - Power supply and grounding cables have to comply with following characteristics:

| | |
|---|--|
| Multicertification Group I and Group II | |
| Power supply: section of coil connection wires = 2,5 mm ² | Grounding: section of internal ground wire = 2,5 mm ² section of external ground wire = 4 mm ² |
| cULus certification: | |
| <ul style="list-style-type: none"> • Suitable for use in Class I Division 1, Gas Groups C • Armored Marine Shipboard Cable which meets UL 1309 • Tinned Stranded Copper Conductors • Bronze braided armor • Overall impervious sheath over the armor | |
| Any Listed (UBVZ/UBVZ7) Marine Shipboard Cable rated 300 V min, 15A min. 3C 2,5 mm ² (14 AWG) having a suitable service temperature range of at least -25°C to +110°C ("BT" Models require a temperature range from -40°C to +110°C) | |
| Note 1: For Class I wiring the 3C 1,5 mm ² AWG 16 cable size is admitted only if a fuse lower than 10 A is connected to the load side of the solenoid wiring. | |

9.1 Cable temperature

The cable must be suitable for the working temperature as specified in the "safety instructions" delivered with the first supply of the products.

Multicertification

| Max ambient temperature [°C] | Temperature class | | Max surface temperature [°C] | | Min. cable temperature [°C] | |
|------------------------------|-------------------|---------|------------------------------|---------|-----------------------------|---------|
| | Goup I | Goup II | Goup I | Goup II | Goup I | Goup II |
| 40 °C | - | T4 | 150 °C | 135 °C | - | 90 °C |
| 60 °C | - | - | 150 °C | - | 110 °C | - |
| 70 °C | N.A. | T3 | N.A. | 200 °C | N.A. | 120 °C |

cULus certification

| Max ambient temperature [°C] | Temperature class | Max surface temperature [°C] | Min. cable temperature |
|------------------------------|-------------------|------------------------------|------------------------|
| 55 °C | T4 | 135 °C | 100 °C |
| 70 °C | T3 | 200 °C | 100 °C |

10 CABLE GLANDS - only **Multicertification**

Cable glands with threaded connections GK-1/2", 1/2"NPT or M20x1,5 for standard or armored cables have to be ordered separately, see tech. table **KX800**

Note: a Loctite sealant type 545, should be used on the cable gland entry threads

11 OPTIONS

B = Solenoid and position transducer at side of port A of the main stage. For hydraulic configuration vs reference signal, see section **12**







C = Position trasducer with current feedback 4÷20 mA, suggested in case of long distance between the electric driver and the proportional valve

Y = External drain, to be selected if the pressure at T port is higher than the max allowed limits



11.1 Possible combined options: /BC, /BY, /CY, /BCY

12 DIAGRAMS - based on mineral oil ISO VG 46 at 50 °C

Regulation diagrams of valves with configurations 51, 53, 71, 73 (positive spool overlap) - values measure at Δp 30 bar P-T

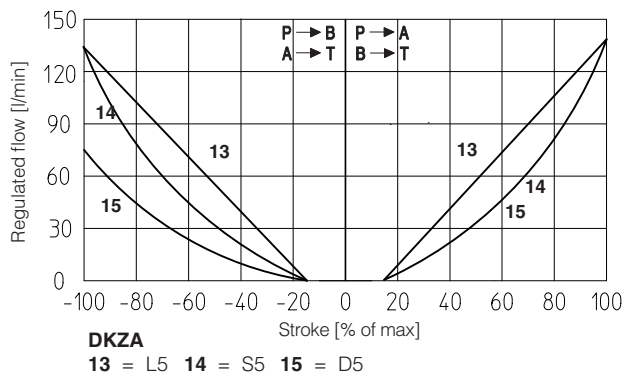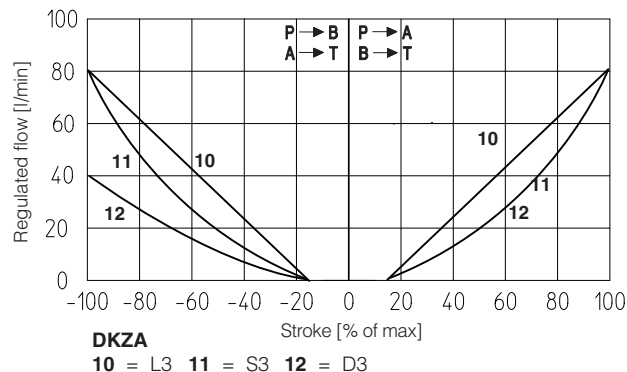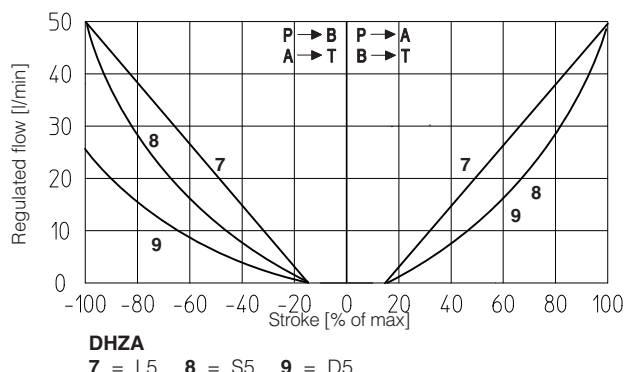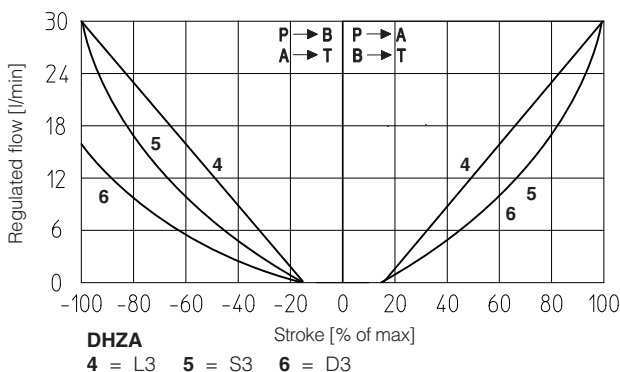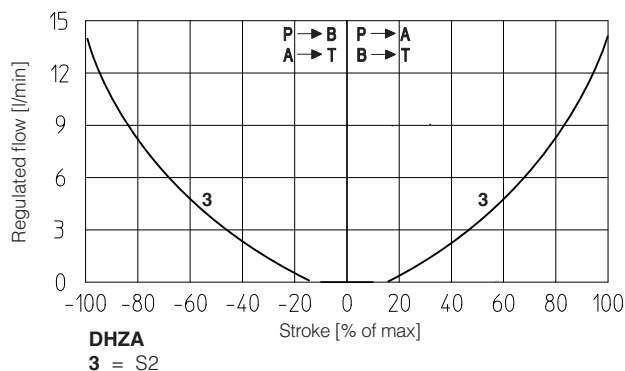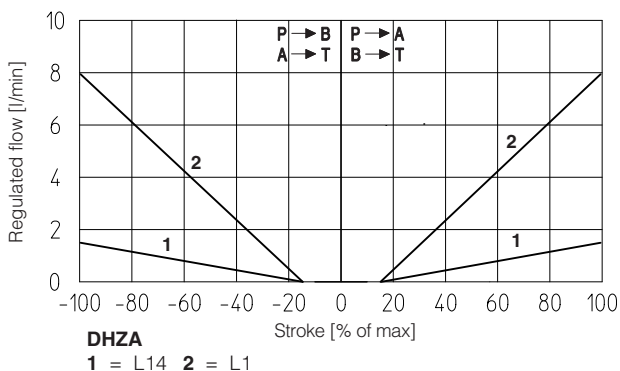





13 FASTENING BOLTS AND SEALS

| | DHZA | DKZA |
|---|---|--|
|  | <p>Fastening bolts: 4 socket head screws M5x50 class 12.9 Tightening torque = 8 Nm</p> | <p>Fastening bolts: 4 socket head screws M6x40 class 12.9 Tightening torque = 15 Nm</p> |
|  | <p>Seals: 4 OR 108; Diameter of ports P, A, B, T: \varnothing 7,5 mm (max) 1 OR 2025 Diameter of port Y: \varnothing = 3,2 mm (only for /Y option)</p> | <p>Seals: 5 OR 2050; Diameter of ports P, A, B, T: \varnothing 11,5 mm (max) 1 OR 108 Diameter of port Y: \varnothing = 5 mm (only for /Y option)</p> |

14 INSTALLATION DIMENSIONS FOR DHZA [mm]

ISO 4401: 2005 (see table P005)
 Mounting surface: 4401-03-02-0-05
 (for /Y surface: 4401-03-03-0-05 without port X)






| Mass [kg] | |
|-----------|-----|
| DHZA-T-05 | 4,0 |
| DHZA-T-07 | 5,1 |

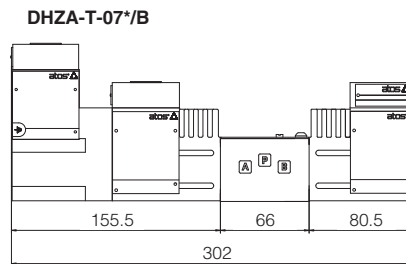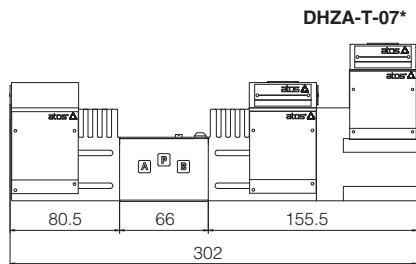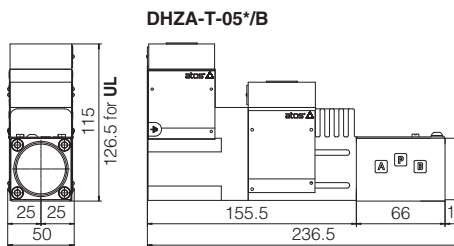

15 INSTALLATION DIMENSIONS FOR DKZA [mm]

ISO 4401: 2005 (see table P005)
 Mounting surface: 4401-05-04-0-05
 (for /Y surface: 4401-03-03-0-05 without port X)

| Mass [kg] | |
|-----------|-----|
| DKZA-T-15 | 6,2 |
| DKZA-T-17 | 7,8 |

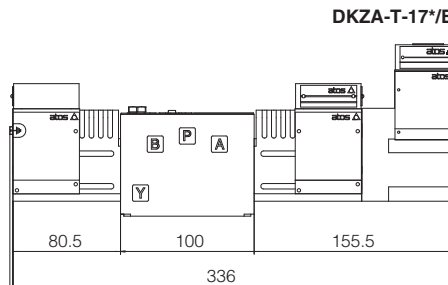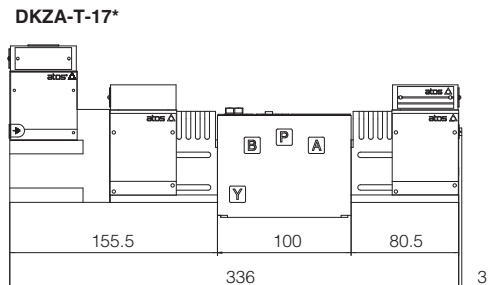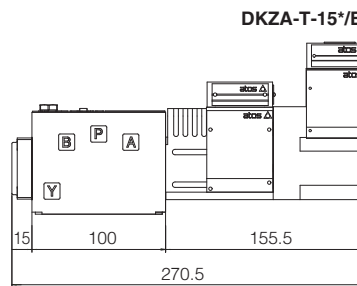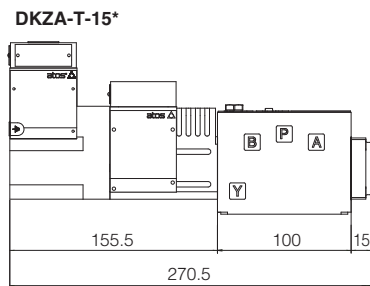

16 RELATED DOCUMENTATION

- X010** Basics for electrohydraulics in hazardous environments
- X020** Summary of Atos ex-proof components certified to ATEX, IECEX, EAC, PESO, CCC
- X030** Summary of Atos ex-proof components certified to cULus
- FX900** Operating and maintenance information for ex-proof proportional valves
- KX800** Cable glands for ex-proof valves
- P005** Mounting surfaces for electrohydraulic valves